

The Project Gutenberg eBook of Time and Time-Tellers, by active 1857-1887 James W. Benson

This ebook is for the use of anyone anywhere in the United States and most other parts of the world at no cost and with almost no restrictions whatsoever. You may copy it, give it away or re-use it under the terms of the Project Gutenberg License included with this ebook or online at www.gutenberg.org. If you are not located in the United States, you'll have to check the laws of the country where you are located before using this eBook.

Title: Time and Time-Tellers

Author: active 1857-1887 James W. Benson

Release date: June 4, 2014 [EBook #45883]
Most recently updated: July 10, 2014

Language: English

Credits: Produced by Chris Curnow, Mark Young and the Online Distributed Proofreading Team at <http://www.pgdp.net> (This file was produced from images generously made available by The Internet Archive)

*** START OF THE PROJECT GUTENBERG EBOOK TIME AND TIME-TELLERS ***

TIME AND TIME-TELLERS.



TIME AND TIME-TELLERS.

BY
JAMES W. BENSON.



LONDON: ROBERT HARDWICKE, 192, PICCADILLY. 1875.

JOHN CHILDS AND SON, PRINTERS.

TABLE OF CONTENTS

	PAGE
TIME AND TIME-TELLERS	1
MODERN WATCHES: THEIR VARIETIES AND MODES OF MANUFACTURE.	72
KEYLESS WATCHES.	101
HOUSE CLOCKS.	104
TURRET CLOCKS.	127
THE GREAT CLOCKS OF THE INTERNATIONAL EXHIBITION OF 1862.	174

INDEX TO THE ILLUSTRATIONS.

	PAGE
1 FRONTISPIECE	
2 VIGNETTE	
3 THE POCKET RING DIAL	14
4 SILVER POCKET DIAL AND COMPASS	16
5 THE CLEPSYDRA OR WATER CLOCK	19
6 THE BOOK-SHAPED WATCH	35
7 ANCIENT TABLE WATCH	36
8 ANCIENT WATCH WITH DIAL	39
9 OLD ENGLISH ROUND WATCH	40
10 OLD OVAL WATCH	41
11 ANCIENT ROUND ORNAMENTAL WATCH	42
12 OLD ENGLISH CALENDAR WATCH	43
13 MARY QUEEN O' SCOTS WATCH (DEATH'S HEAD)	44
14 ANCIENT WATCH CASE (SCRIPTURAL DESIGN)	45
15 DITTO TABLE WATCH (DITTO)	46
16 GRETTON'S WATCH	48
17 ANCIENT BOX WATCH	49
18 OLIVER CROMWELL'S WATCH	50
19 EARLY ORNAMENTAL ROUND WATCH CASE	51
20 JOHN MILTON'S WATCH	52
21 SMALL EARLY WATCH	54

22 ANCIENT WATCH WITH PENDULUM	55
23 ANCIENT BRASS WATCH WITH LID	56
24 IGNATIUS HUGGEFORD'S WATCH	59
MODERN WATCHES.	
25 HORIZONTAL	74
26 SKELETON LEVER	74
27 FULL PLATE LEVER	75
28 THREE-QUARTER PLATE LEVER	75
29 THE CHRONOGRAPH	92
30 PERPETUAL CALENDAR, KEYLESS	96
31 COMPLICATED DITTO AND INDEPENDENT SECONDS	97
32 THE MERIDIAN WATCH	99
ESCAPEMENTS TO WATCHES.	
33 THE VERGE ESCAPEMENT	78
34 THE HORIZONTAL DO.	79
35 THE DUPLEX DO.	80
36 THE LEVER DO.	81
37 THE CHRONOMETER DO.	83
BALANCES, ETC.	
38 COMPENSATION BALANCE	85
39 OLD BALANCE CLOCK	108
40 CLOCK SPRING	109
41 RACK STRIKING WORK	113
42 BACK OF FRENCH CLOCK	116
43 CARRIAGE CLOCK	118
45 ENGLISH ORMOLU CLOCKS	120-22
46 TELL-TALE CLOCK	123
CLOCK ESCAPEMENTS.	
47 CROWN WHEEL ESCAPEMENT	147
48 ANCHOR DO.	148
49 DEAD BEAT DO.	149
50 FRENCH SINGLE-PIN ESCAPEMENT	150
51 THREE LEGG'D GRAVITY DO.	151
52 DOUBLE DITTO DITTO	154
TURRET CLOCKS.	
53 WELLS CATHEDRAL CLOCK	135
54 OLD ST DUNSTAN'S DO.	137
55 ST JAMES'S PALACE DO.	138
56 ST PAUL'S CATHEDRAL DO.	140
57 ROYAL FREE HOSPITAL DO.	141
58 MEMORIAL TURRET CLOCK DIAL	157
59 MODERN TURRET CLOCK MOVEMENT	164
60 " " HOUR WHEEL AND SNAIL	166
61 " " THE RACK	168
62 " " THE PENDULUM ROD	169
63 QUARTER OR CHIME CLOCK	171
64 GAS WHEEL FOR ILLUMINATED DIAL	172
65 NEST OF BEVELLED WHEELS CARRYING HANDS	173
66 HAMMER AND BELL	174
67 BENSON'S GREAT CLOCK. THE EXTERIOR	175
68 " " " THE MOVEMENT	176
69 SUN-DIAL	180

TIME AND TIME-TELLERS.

[1]

Time cannot be thoroughly defined, nor even properly comprehended by mankind, for our personal acquaintance with it is so brief that our longest term is compared to a span, and to 'the grass which in the morning is green and groweth up, and in the evening is cut down and withered.' The ordinary thinker can scarcely carry his idea of Time beyond that small portion of it which he has known, under the name of life-time. The metaphysician classes Time with those other mysteries,—Space, Matter, Motion, Force, Consciousness, which are the Gordian knots of Mental Science. Time is naturally divided into three most unequal parts,—whereof the Past includes all that has happened until now from that far-distant period when 'Heaven and Earth rose

out of chaos;' the Present is but a moment, expended in a breath, to be again like that breath momentarily renewed; the Future is, as the Past,—'a wide unbounded prospect,' an 'undiscovered country,' into which Prophecy itself penetrates but partially, and even then bears back to us but small information; for its language catches the character of a grander clime, and the denizens of this lower earth are incapable of understanding its gorgeous metaphors; the brightness is as blinding as the darkness. We may attempt to pierce the Future by the light which History throws from the Past, but History's record is imperfect; her chronicles are of the rudest and most unreliable character; her most valued memorials serve but to make Past 'darkness visible,' her most ancient registers reach back but a short distance compared with those testimonies which geologists have discovered, and given us veritable 'sermons in stones' about. The Past is, indeed, scarcely less of a mystery than the Future; even the Present we only know in part, but we do know that the brief term during which man 'flits across the stage' of time ere he goes hence and is no more seen, is of inestimable value. Most of us soon make the discovery that the world has much to teach which there is little time to learn and still less time to apply to good purpose. *Ars longa, vita brevis est*, is the general expression of human experience. For every man there are duties and labours for which time is all too short; just as he begins to understand and to perform his work wisely and successfully, the 'spirit of the destinies,' as Mr Carlyle would say, 'calls him away;' but whither he goeth is as great a mystery as whence he cometh. This, however, we do know, no wise man ever disregarded Time, inasmuch as of this treasure there is no laying in a fresh store when life's supply has been exhausted; the wasters, the 'killers' of Time, like the foolish virgins who neglected their lamps, are met invariably with the 'Not so,'—as the door of opportunity is shut in their faces. Like the dial with the inscription '*Nulla vestigia retrorsum*' each man's steps are taken never to be retraced, the act once done can no more be recalled than the shadow on the dial can go backward. What wonder then that the most thoughtful of men are particularly careful of their time, regulating their use of it with the utmost precision and weighing it out as scrupulously as a miser would his gold? What wonder that they should sigh and grieve over a wasted day, and with bitter self-reproach should say to themselves as Titus did, 'Perdidi diem,'—I have lost a day? What wonder is it that such should teach themselves to wrestle with Time, even as Jacob wrestled with the angel, for a blessing; and to regard those reckless ones, in whose butterfly existence are counted only the 'shining hours,'—as the bee might be supposed to regard the idle gnats which frolic in the sunbeams heedless both of to-day and of to-morrow.

[2]

[3]

The poets are our best interpreters of Time, and they seem never tired of referring to it and symbolising it by every possible figure, emblem, and trope.^[1] Celerity of motion and brevity of duration are discovered to be its chief characteristics. Time is therefore depicted as flying,—fast, noiselessly, and uninterruptedly. It is a river, speeding on with imperceptible but resistless pace to the ocean of eternity. It is a stern vigorous old man—Time is already old—rushing by us with never-slackening strides, bearing blessings for each and all, but we must be upon the alert to strive with him for his gifts—'to seize Time by the forelock—'or he will forget to bestow them.

[4]

We too often charge upon Time the evil which is the result of our own lack of energy, and thus it happens that although in kindly moments our poets seem to delight in exalting and glorifying him for all manner of enjoyments, at others they can find no word too coarse or uncivil to apply to him. 'Time,' says Shakespeare, 'is a very bankrupt,' adding,

'Nay, he's a thief too; have you not heard men say
That time comes stealing on by night and day?'

Time is, in proverbial philosophy, the most churlish and unaccommodating of acquaintances,—'Time and tide tarry for no man.' Time is always liable to be chided, as we have said, when one feels like Hamlet, 'The times are out of joint;' although our next door neighbour may, with as much or more reason, be blessing the self-same hour we are condemning. Time is indeed all things to all men, and 'travels divers

[5]

paces with divers persons.' Sweet Rosalind described long ago 'who Time ambles withal, who Time trots withal, and who he stands still withal.' 'I prithee,' asks Orlando, 'who doth he trot withal?' and no matter how often we overhear her reply, we shall listen with delight to the quaint language of the pretty rejoinder,—'Marry, he trots hard with a young maid between the contract of her marriage and the day it is solemnized; if the interim be but a se'nnight, Time's pace is so hard that it seems the length of seven years.' 'And who ambles Time withal?' 'With a priest that lacks Latin and a rich man that hath not the gout; for the one sleeps easily because he cannot study; and the other lives merrily because he feels no pain; the one lacking the burthen of lean and wasteful learning, the other knowing no burthen of heavy tedious penury. These ambles Time withal.' 'Who doth he gallop withal?' 'With a thief to the gallows; for though he go as softly as foot can fall, he thinks himself too soon there.' 'Who stays Time still withal?' 'With lawyers in the vacation; for they sleep between term and term, and then they perceive not how Time wags.'

FOOTNOTE:

[1] Phoebus Apollo in Ovid's *Metamorphoses* claims that he is Time's special exponent:—

—'Per me, quod eritque, fuitque, Estque, patet; per me concordant carmina nervis.'

If Roger Bacon's Brazen-head could have repeated and continued his oracular utterances at fixed intervals he would have been a very sensational performer over some prominent public time-piece of the present day. If only once in twelve months, say at midnight, when the year ends, he could have pronounced his three important speeches, 'Time is; Time was; Time's past!' he might have rivalled some of our best actors or orators in attracting the multitude; unfortunately, however, our mechanical clockwork performers have never risen to the dignity of speech, and the secret of Friar Bacon's magic died with the inventor of gunpowder,—which last it is a pity, perhaps, did not also slip out of use and memory along with it. 'Time is,—time was,—time's past' seems to comprise a whole world of hopes, fears, and lost opportunities, and sounds like a little condensed history of all that ever has happened or ever can happen. Herein we may imagine we can observe the wonder-working qualities of Time, solving all mysteries, bringing everything whether of good or evil to fruition, testing friendship and love, solacing troubled and wounded hearts, and healing all manner of griefs; but then we also remark that he is the abaser of the proud as well as the uplifter of the humble. If he builds, he as surely destroys, being, indeed, the Great Spoiler, *edax rerum*, before whose breath myriads of living things through all generations have faded away, in regular sequence, and towns and cities and the several civilizations of the world have one after another decayed and perished with all their wondrous works, and glories, and aspirations.

'Who shall contend with Time—unvanquished Time,
The conqueror of conquerors, and lord
Of desolation?'

Time's chronicle is of itself proof of his character, for the very record of his deeds he does not permit to be of long endurance. Time was, before the earliest historian began to take note of him, before the 'twilight of fable,' and before the most primitive symbol. Time himself were too brief to tell of his various experiences, the full value and purport of which we shall never know, until we have bridged the abyss which separates the present from the future. Time and the world, we are told, commenced life simultaneously, and their twin birth was greeted triumphantly 'with the music of the spheres,' the morning stars sang together rejoicingly; and it is also said that their courses shall be simultaneously determined when the edict shall be promulgated that 'Time shall be no more.' When will that great event take place? is a question which has occupied the attention of many theologians and others, who temporarily forget that 'of that day and hour knoweth no man.' As of the end so of the beginning of Time, there is to us no landmark, though geologists are endeavouring to prove that they have traced some of his earliest footprints in this world of ours. Professor

[6]

[7]

[8]

Tyndall tells us that 'not for six thousand, nor for sixty thousand, nor for six thousand thousand, but for æons, embracing untold millions of years, this earth has been the theatre of life and death. The riddle of the rocks has been read by the geologist and palæontologist, from subcambrian depths to the deposits thickening over the sea-bottoms of to-day. And upon the leaves of that stone book are stamped the characters, plainer and surer than those formed by the ink of history, which carry the mind back into abysses of past time compared with which six thousand years cease to have a visual angle.'

Although Time is so vast in his operations and so truly marvellous in his many features, it has, nevertheless, been found possible to measure his shorter intervals with the greatest accuracy,—even to but a few seconds in a year. It took some centuries to accomplish this feat, but it is now surely and systematically done. The stages of horological science are some of them remote, but they are well worth studying. The earliest divisions of time were doubtless those made by the operations of Nature, producing day and night,—the sun and moon were the earliest chronometers, and, marked by them, 'the evening and the morning were the first day.' It is even now by noting the recurrence of certain celestial phenomena that we are enabled to certify to ourselves the accuracy of our time-pieces, but although the motion of the heavenly bodies is the standard of computation for lengthened periods, it is found more convenient to reckon short terms, such as seconds, minutes, and hours, by machinery set in motion by a spring or by weights mathematically adjusted, and this in a word has given birth to the science called Horology.

[9]

We can readily comprehend the division of time into days and nights, for these, as we have said, are the natural divisions. Let us trace the origin of more arbitrary periods, such as hours, and weeks, and months, and years. First, then, as to days, let it be remembered that the beginning and ending of an ordinary English day differs in several respects from those of other nations. The Jews reckon their day, as do also the Greeks and Italians, from sunset to sunset; the Persians from sunrise to sunrise. The astronomical and nautical day is computed from noon to noon, and is reckoned by 24 hours, not by twice 12,—as, for instance, instead of writing half-past four in the morning of, we will say, Jan. 2, the astronomer would write Jan. 1. 16 h. 30 m. Our ordinary English day is reckoned from 12 to 12 at midnight, after the fashion set by Ptolemy, which has this advantage over the method of reckoning from sunrise or sunset, that the latter periods are continually varying with the seasons of the year. The grouping of seven days into a week is shown in Genesis, but the seventh day is there alone specially named. The Sabbath is still kept by the Jews on the seventh day, but Christians keep the first day of the week in honour of Christ's resurrection, and call it the Lord's Day. After the older planetary method, Sunday was named in honour of the Sun, Monday of the Moon, Tuesday of Tuesco, or Mars, Wednesday of Woden or Mercury, Thursday of Thor, Friday of Friga, Venus, Saturday of Saturn. The Month, named after the Moon in consequence of a month being nearly equal to the time occupied by the Moon in going through all her changes, is again classed under the names lunar or calendar; the lunar month is rather more than 29½ days, but as the solar month is nearly a day longer it would require more than twelve lunar months to make a year, arbitrary additions have been therefore made to each month, some consisting of 30, some of 31 days; and months so arranged to form the calendar are called calendar months, twelve of which make a year of about 365¼ days. Until the time of Julius Cæsar the year was reckoned as of 365 days only, a number which after many centuries required the addition of ninety days to rectify, he therefore ordered one of the years to consist of 444 days, and that subsequently every fourth year should contain 366 days. Even this very summary imperial method was attended with its drawbacks and difficulties, for the earth's revolution round the Sun is made in eleven minutes eleven seconds, less than 365¼ days, which minutes in the course of about 1600 years required to be taken into consideration, and in 1582 Pope Gregory XIII. took off ten days by making the 5th of October the 15th; but the Gregorian time was not introduced into England till 1752 when the error amounted to about eleven, so eleven days were subtracted from 1752 leaving it only 354 days,—much to the indignation of the illiterate people of that time, who clamoured,

[10]

[11]

assembled in great mobs to testify to their sense of the great injury inflicted upon them, 'Give us back our Eleven days,'—one of Hogarth's prints of the 'Election' exhibits a paper containing this very inscription. The fury of the populace at being robbed of its precious time availed not; the day after the 2nd of September, 1752, was made the 14th of September, and from that time dated the New Style, since which the year has been almost exactly correct. Up to 1752 the legal year began in England on the 25th of March, and it was usual up to that day to employ two dates, as 1750-1; but since the change of style the year has commenced with the first of January,—nearly midwinter. As there is one day more than fifty-two weeks in a year every year begins one day later in the week than the preceding year; and after leap-year two days later. The only country in Europe which still retains the Old Style is Russia,— the difference between the styles, now twelve days, is usually indicated by O.S. and N.S., or as in one or two of our watch illustrations by 'Russian' and 'Gregorian.' As regards the smaller divisions of time, it should be noted that the minute and the hour are thus reckoned,—the Earth divided into 360 degrees, turning upon its axis once every twenty-four hours, brings fifteen degrees under the sun each hour, and makes those fifteen degrees of longitude equivalent to one hour of time,— fifteen geographical miles being equivalent to one minute of time.

[12]

The earliest horologe or hour measurer of which history makes mention is that called the *Polos*, and the *Gnomon*. Herodotus (lib. II.) ascribes their invention to the Babylonians, but Phavorinus claims it for Anaximander, and Pliny for Anaximenes. The *Gnomon*, which was the more simple and probably the more ancient instrument, consisted simply of a staff or pillar fixed perpendicularly in a sunny place, the shadow of which was measured by feet upon the place where it fell,—the flight of time being computed thereby. In later times the word *Gnomon* was the title of the sun-dial, and it is the name still in use for the style or finger which throws the shadow on the dial and thus indicates the hour. The *Polos* or *Heliotropion* was no doubt a superior instrument to the earliest *Gnomon*, but, from its being so seldom mentioned, we may suppose it not to have been so generally used. The *Polos* consisted of a basin, in the middle of which the perpendicular staff or finger was erected, and marked by lines the twelve portions of the day. The *Dial* was but another form of *Polos*; its name indicates a Roman origin,—namely, from *Dies*, a day, but there was a Greek sun-dial called *Sciathericum*, from *skia*, a shadow. The invention is said to have been derived by the Jews from the Babylonians, to whom, as we have seen, Herodotus ascribed it, and there is mention made in the viii. of Isaiah of the dial of Ahaz,—a king who began to reign 741 B.C. The form of the Dial of Ahaz has not been ascertained; but there is reason to believe that the ancient Jews and the Brahmins were acquainted with the uses of the dial and applied it to astronomical purposes. Dials were, it is said, not known in Rome before 293 B.C., when one was set up by Papius Cursor the Roman General, near the Temple of Quirinus. At Athens there is an octagonal temple of the Winds still standing, which shows on each side the lines of a vertical dial and the centres where the *Gnomons* were placed. At one time the art of Dialling was most assiduously studied; its rudiments may be described as follows:

[13]

The plane of every dial represents the plane of some great circle on the earth, and the *Gnomon* the earth's axis; the vertex of a right *Gnomon*, the centre of the earth or visible heavens. The earth itself, compared with its distance from the sun, is considered as a point, and therefore if a small sphere of glass be placed upon any part of the earth's surface so that its axis be parallel to the axis of the earth, and the sphere have such lines upon it, and such plans within it, as above described, it will show the hour of the day as truly as if it were placed at the earth's centre, and the shell of the earth were as transparent as glass. The diversity of the titles of sun-dials arises from the different situation of the planes, and the different figure of the surfaces whereon they are described, whence they are denominated equinoctial, horizontal, vertical, polar, erect, direct, declining, inclining, reclining, cylindrical, &c.

[14]



The Pocket Ring Dial.


All the before-mentioned time-measurers were up to a certain period non-portable, and in addition to the drawback of being unserviceable excepting when the weather was clear and the days bright were as useless for private purposes, as they were unadapted for the winter-time or for night. The next step was therefore a portable dial, but this was probably not invented until after a very long interval. The Dial of which the above is an illustration, was probably one of the earliest of portable time-keepers, the time being shown by means of a hole through which the light fell on the inside, which had an inner ring adaptable to the day and the month. Ring-dials of this description were in common use within the last century in this country, and were manufactured in large numbers at Sheffield when watches were too expensive to be generally attainable. Some of these Ring-dials were of superior construction, and were made by means of more than one ring to serve for different latitudes. As an example of a still greater advance in the manufacture of pocket dials, see the illustration on the next page.

[15]

The Dial consists of a thin silver plate properly divided and marked, and having a compass with glass cover sunk at one end of it. The *Gnomon* or style moves upon a hinge so as to allow of its lying flat upon the Dial while in the pocket, and thus rendering the instrument conveniently portable. The *Gnomon* itself is also susceptible of elevation or depression and the beak of the bird carved on a thin slip of silver at its side marks the exact extent of the *Gnomon's* elevation. This Dial is indubitably of French manufacture.

[16]

One would imagine that it was such a dial as this that Shakspeare had in his mind's eye when he wrote the well-known passage which he put into the mouth of Jaques, wherein that philosophic satirist describes his meeting with a fool in the forest.

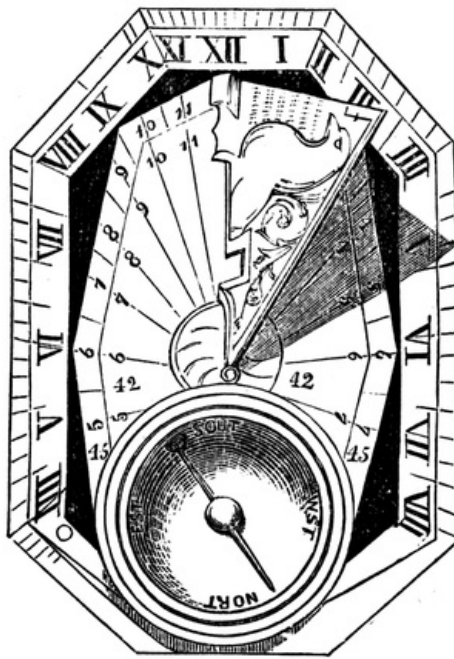

Silver Pocket Dial (in the collection of the Honble Company of Clockmakers, London).


'Good morrow, fool, quoth I. "No sir," quoth he,
 "Call me not fool till heaven hath sent me fortune;
 And then he drew *a dial from his poke*,
 And looking on it with lack-lustre eye,
 Says, very wisely, "It is ten o'clock:
 Thus we may see," quoth he, "how the world wags:
 'Tis but an hour ago since it was nine,
 And after one hour more 'twill be eleven.
 And so from hour to hour we ripe and ripe,
 And then from hour to hour we rot and rot.
 And thereby hangs a tale." When I did hear
 The motley fool thus moral on the time,
 My lungs began to crow like Chanticleer,
 That fools should be so deep contemplative;
 And I did laugh, sans intermission,
An hour by his dial.'

What the fool's dial was, has given rise to many conjectures, but there is no better authority perhaps on the subject than Mr Halliwell, from whose magnificent and elaborate folio we will make the following very interesting extract. [17]

'The term dial appears to have been applied in Shakspeare's time to anything for measuring time in which the hours were marked, so that the allusion here may be either to a watch, or to a portable journey ring, or small dial. The expression "it is ten o'clock" is not decisive, as it may be considered to be used merely in the sense of the hour thus named. * * * A watch even is sometimes called a clock, * * * and it seems by no means unlikely that the common ring dial which has been in use for several centuries up to a comparatively recent period, should be the dial referred to in the text.'

Whatever may have been the shape of the dial which Jaques saw drawn from the fool's 'poke,' it is an undoubted fact that portable dials did serve the part of time-keepers, and were in their way valuable as such to those who had learnt how to use them. But the dial would not do the work of the watch in an age when people no longer travel by the waggon-load or with pack-horse, but are whirled fifty or sixty miles in that time and have to reckon their engagements not by the day, but by the minute. The world no longer 'wags' in jog-trot style, but speeds at steam-pressure and sends its messages by lightning-conductor; it consequently values its time more highly and measures it more carefully. [18]

The Horologe which possibly next succeeded in date the invention of the Dial, was the Clepsydra or Water-Clock, the precise antiquity of which is however unknown.

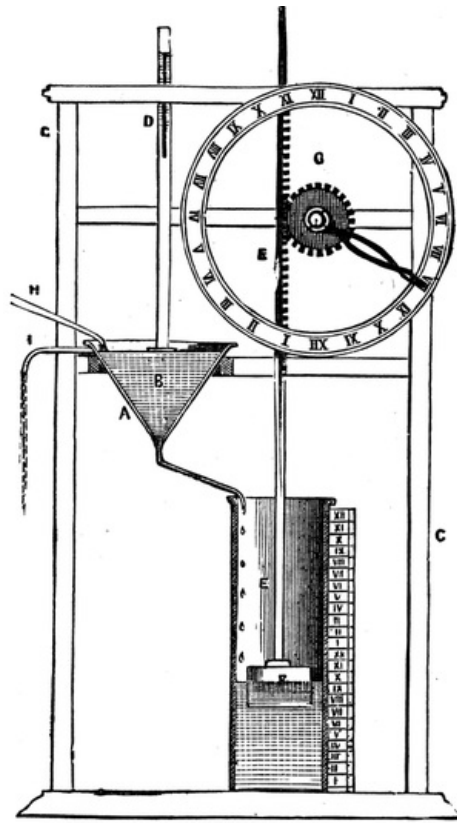

The Clepsydra, or Water-Clock of the Greeks.

The CLEPSYDRA is so named because the water escapes from it as it were by stealth, but in a regulated flow so as to permit of the lapse of time being computed thereby, even as by sand running through sand-glasses. The Clepsydra appears to have been at first used to limit the time during which persons were allowed to speak in the Athenian Courts of Justice; 'the first water,' says Æschines, 'being given to the accuser, the second to the accused, and the third to the judges,'—a special officer being appointed in the courts for the purpose of watching the Clepsydra and stopping it when any documents were read whereby the speaker was interrupted. The time, and consequently the water allowed, depended upon the importance of the case. This custom, says Phavorinus, was to prevent babbling, that such as spake should be brief in their speeches. Ctesibius of Alexandria, who lived about 245, invented a much improved water-clock, mentioned by Vitruvius and Athenæus. Another kind of Clepsydra consisted of a vessel of water having a hole in it through which the fluid gradually escaped; a miniature boat floated upon the water and descended as the water decreased, whilst an oar placed in the boat indicated the hour by pointing to certain line-marks on the side of the vessel. The hole through which the water dropped was made, we are told, through a pearl, because it was supposed that the action of the water upon the pearl would not, as upon other substances, enlarge the aperture, nor would the pearl, it was imagined, be choked by the adhesion of any other material. The chief fault of the Clepsydra as a chronometer arose from the inequality of the flow of water, it being found to escape more rapidly when the vessel was full than when it was becoming empty, and also more speedily in hot weather than in cold. The Egyptians are however said to have measured by this machine the course of the sun; by it Tycho-Brahe computed the motion of the stars; and by it Dudley made his maritime observations. Plato furnished the original idea of the hydraulic organ by inventing a Clepsydra, or water-clock, which played upon flutes the hours of the night when darkness precluded their being shown by the index. Clepsydræ are still used in India.

[20]

[21]

The SAND-GLASS, as we have said, is an instrument of the same character as the Clepsydra,—the one measuring time by the fall of water and the other by the running of sand. Sand-glasses are known to have been used 200 B.C. The best hour-glasses, it is said, were those in which powdered egg-shells well dried in the oven were used instead of sand, such powder being less affected by changes in the atmosphere than sand would be. Sand-glasses are now seldom used except on board ship, and by

domestics to compute the time for the boiling of eggs.

King Alfred's invention for measuring time by the burning of candles, which were marked by circular lines to show the progress of the hours, was another effort of rude skill, which however could have been but partially successful even in the opinion of its inventor, for the accuracy of candle-horologes is interfered with by many different influences, prominent among which must of course have been the varying qualities of the materials used in their manufacture, and the more or less care with which they were guarded from the wind, so as to prevent their guttering.

We now come to consider the date of the next grand step in the progress of Horology,—namely, that of the invention of the *clock*. The name itself may be derived either from the French, *la cloche*, a bell, or from the German, *die gloke*, or *die kloke*. There is no doubt that the word *cloche* was meant to distinguish the instrument which marked the hours by sounding a bell, from the *montre* or watch, which (derived from the Latin *monstro*, to show) merely shows the time by its hands. In ancient books the word *cloche* simply stands for a bell,—the monks being accustomed to ring a bell at certain periods marked for them by their sun-dials or hour-glasses, and 'What's o'clock?' in old writers is often merely equivalent to the inquiry, 'What hour was last struck by bell?' The word horologe or hour-measurer of course equally applied to the sun-dial, the clepsydra, and the clock, and this convertibility of terms makes it all the more difficult to trace the point at which the newer invention began. Beckmann, in an ingenious analysis of various statements as to the first inventors of clocks made to go by weights and wheels, ascribes the invention to the eleventh century, but he does not attempt to name the first clockmaker. His authority for the date is the life of William Abbot of Hirshan, wherein there is mention made of a machine used by the monks for measuring time, which cannot in Beckmann's opinion have been a clepsydra. Beckmann does not believe that clocks were of European origin, but that they were derived from the Saracens. He founds his opinion upon a horologe described by Trithenius which was presented by the Sultan of Egypt in 1232, to the Emperor Frederic II. of Germany. 'In the same year,' says he, 'the Saladin of Egypt sent by his ambassadors, as a gift to Frederic II., a valuable machine of wonderful construction, worth more than 5000 ducats. For it appeared to resemble internally a celestial globe in which figures of the sun, moon, and other planets, formed with the greatest skill, moved, being impelled by weights and wheels, so that performing their course in certain and fixed intervals, they pointed out the hour, night and day, with infallible certainty; also the twelve signs of the Zodiac with appropriate characters, moved with the firmament, contained within themselves the course of the planet.'

To whom the high honour belongs of inventing the clock is, to use a not unknown phrase, 'lost in the mists of antiquity.' All the ancients who were reported as skilful in mechanics seem to have obtained a modicum of credit as clock-inventors. Archimedes and Posidonius before, the Christian era, Boëthius in the 5th century, Pacificus about the middle of the 9th, Gerbert at the end of the 10th, Wallingford near the beginning of the 14th, and Dondi at the end of the 14th, have each in their turn been asserted to be the inventors of the clock.

The sphere of Archimedes, made 200 B.C., as mentioned by Claudian, was evidently an instrument with a maintaining power but without a regulator, and therefore would not measure time in any other manner than as a planetarium, turned by a handle, measures, or rather exhibits, the respective velocities of the heavenly bodies; and the same may be said of the sphere of Posidonius, as mentioned by Cicero ('De naturâ Deorum'). The clock of Boëthius was a clepsydra, as was also that of Pacificus, according to some, for Bailly in his History of Modern Astronomy asserts that Pacificus was the inventor of a clock going by means of a weight and a balance, and if so the invention must be ascribed to Pacificus; but Bailly gives no authority for his assertion. Gerbert's horologe is said to have been merely a sun-dial, and Wallingford's horologe, called the Albion, must have as much resembled a planetarium as a clock, for the motions of all the heavenly bodies appear to have been conducted by the maintaining power, whatever that was, without controlling

[22]

[23]

[24]

mechanism. This instrument, made in 1326, is also described as having shown the ebb and flow of the sea, the hours, and the minutes.

There are, however, still earlier data as to clocks in England than this of Wallingford's, for we find that in 1288 a stone clock-tower was erected opposite Westminster Hall with a clock which cost 800 marks, the proceeds of a fine imposed upon Ralph de Hengham, Chief Justice of the Queen's Bench. The tower mentioned was still standing in 1715, and in it was a clock which struck the great bell known as Tom of Westminster so as to be heard by the people in all the law courts. In Queen Elizabeth's time the clock was changed for a dial upon the clock tower, which, however, bore upon its face the same Virgilian motto, 'Discite justitiam moniti,'—referring to the fine inflicted upon the Chief Justice for making an alteration in a record by which a poor dependent was made to pay 13s. 4d. instead of 6s. 8d. A dial with this motto was still to be seen in Palace Yard, Westminster, within the last dozen years, but was removed with the houses which were then demolished to make way for the gilded palings which have since been erected between Palace Yard and Bridge Street, Westminster.

[25]

In 1292 a clock was placed in Canterbury Cathedral, which, according to a statement in a Cottonian MS., cost £30, a large sum at that time.

Dante, who died in 1321, aged 57, makes the earliest mention of an *orologio* which struck the hour:

'Indi come orologio che *ne chiami*
Nel hora che la sposa, d'Idio surge
Amattinar lo sposo, perche l'ami.'

Il Paradiso.—C.X.

In 1344 James Dondi constructed at Padua, by the command of Hubert, prince of Carrara, a clock similar to Wallingford's, and thus obtained for himself the title of *Horologius*; which, it is said, is still borne by his descendants in Florence. In 1364 Henry de Wyck, a German, made a clock for Charles V. of France, which was erected in the tower of his palace. This clock was regulated by a balance, the teeth of the crown-wheel acted upon two small levers called pallets which projected from, and formed part of, an upright spindle or staff, on which was fixed the balance, and the clock was regulated by shifting the weights placed at each end of the balance.

[26]

In 1368 Edward granted protection against 'injuriam, molestiam, violentiam, damnum, aut gravamen' to three Dutch horologers, John and William Uneman and John Lietuyt, who had been invited to this country from Delft.

Chaucer, who died in 1400, speaks of a cock crowing with such regularity as to rival a clock:

'Full sikerer (surer) was his crowing in his loge
As is a clok, or any abbey orloge.'

Whether the abbey horologe referred to was really a clock in our sense of the term, or merely the bell rung by the monks at a certain hour indicated by the clepsydra, is matter of conjecture, but the probability is, that clockmaking had advanced sufficiently about this time to have given rise to Chaucer's simile. Froissart speaks of a famous clock which struck the hours, and was remarkable for its mechanism, and which was removed in 1332 by Philip the Hardy, duke of Burgundy, from Courtrai to his capital at Dijon.

[27]

After this date frequent mention is made of clocks in various histories, some of which instruments remain even to the present day. Dr Heylin thus describes a famous clock and dial in the Cathedral of Lunden in Denmark. 'In the dial are to be seen distinctly the year, month, week, day, and every hour of the day throughout the year, with the feasts, both those which are movable and fixed, together with the motions of the sun and moon, and their passage through each degree of the zodiac. Then for the clock, it is so framed by artificial engines that whensoever it is to strike, two horsemen encounter one another, giving as many blows apiece as the bell sounds hours, and on the opening of a door there appeareth a theatre, the Virgin

Mary on a throne with Christ in her arms, and the three kings or Magi (with their several trains) marching in order, doing humble reverence, and presenting severally their gifts,—two trumpeters sounding all the while, to adorn the pomp of the procession.'

The clock at Hampton Court is one of the most ancient in England, but all that remains of the original structure is the dial and work connected with it, facing the east, in the second court of the old part of the building erected by Wolsey. Of the ancient body or works there is no record, and its maker is unknown, but it bears the initials N.O. and the date 1540.

There is a celebrated antique clock at Strasburg which is described as striking the quarter-hours by four figures, symbols of the ages of man;—the first being struck by a child with an apple, the second by a youth with an arrow, the third by a man with a staff, and the fourth by an old man with a crutch, then came Death, who struck the hour, and thus reminded the observer that his last hour would eventually arrive.

[28]

From the evidence adduced respecting the origin and inventors of the clock it is not unreasonable to conclude with Ferdinand Berthoud (a Frenchman who wrote much and was a great authority upon the subject) that such a clock as that which was constructed by Henry de Wyck for Charles the Wise of France, was not the invention of one man, but was the result of a series of inventions made at different times by various persons, each of which is worthy to be considered a separate invention. It was the simple employment of the natural force of gravity as to the fall of bodies in free space, that paved the way to the extreme accuracy and constancy of rate which belong to the clocks of modern times, and the conclusion to which Mons. Berthoud arrived respecting the progression of the essential improvements is thus stated:—

1. Toothed wheel-work was known in ancient times, and particularly to Archimedes, whose instrument was provided with a maintaining power, but had no regulator or controlling mechanism.

[29]

2. The weight applied as a maintainer at first had a fly, most probably similar to that of a kitchen-jack.

3. The ratchet-wheel and click for winding up the weight, without detaching the teeth of the great wheel.

4. The regulation of the fly depending upon the state of the air, it was abandoned, and a balance substituted.

5. An escapement next became indispensable, as constituting with the balance a more regular check than a fly upon the tendency which a falling weight has to accelerate its velocity.

6. The application of a dial-plate and hand to indicate the hours was a consequence of the regularity introduced into the going part.

7. The striking portion, to proclaim at a distance, without the aid of a watcher, the hour that was indicated: and this was followed by the alarum.

8. The reduction and accommodation of all this bulky machinery to a portable and compact size, as in watches.

Such a succession of ingenious contrivances, introduced by different men to improve upon the first rude instrument, is perfectly analogous to the successive improvements which have been made in the modern clock, since that of Henry de Wyck's was constructed. Large iron wheels, continually exposed to the oxidizing influence of the air, in which unequal and ill-shapen teeth were cut with the inaccuracy of a manual operation, were by no means calculated to transmit the maintaining power with perfect regularity to the balance, supposing it to have been a good regulator; but when it is further remembered that the alternate direct pushes of the escape-wheel against the pallets must have produced jerks, and destroyed, or greatly disturbed, the regularity of this most essential part of the mechanism, great

[30]

accuracy was not to be expected; even minutes were deemed too small portions of time to be shown by such a machine. The clock was set daily by some person specially appointed to the office, and even then was not to be depended upon, for forty minutes' variation in twenty-four hours was not thought to be an ill performance.

The most ancient clocks had no pendulum such as we now see, but had instead a balance vibrating on the top of the clock, as seen in illustration, p. 108, which is an example of ancient clockwork.

Upon the invention of springs, in lieu of weights, as the maintaining or motive power in clocks, which was made towards the close of the fifteenth century, it became obvious that time-pieces might be rendered portable, and that the new motive power, a coiled spring, could act independently of position. This discovery was of great importance, and yet to whom we are indebted for it is unknown; the value of the invention became still more apparent when the fusee, or mechanism for equalizing the variable power of a coiled spring, was applied. Berthoud says, 'It was soon perceived that the action of the spring being much greater at the height of its tension than at the end, great variations in the watch resulted therefrom. This was remedied by a mechanism called *stack-freed*, that is, a kind of curve, by means of which the great spring of the barrel acted on a straight spring, which opposed itself to its action, and when this spring was nearly down, acted more feebly.' The word *stack-freed* was stated to be German, and therefore gave rise to a supposition that the invention was of German origin, but the word is not to be found in a German dictionary, and, if ever German, it was probably strictly technical, and soon became obsolete. Berthoud has given a drawing and description of a portable clock, probably by Jourdain, without a fusee, and some of the modern continental watch-makers have, perhaps, derived their idea from it of making a watch keep time without a fusee. Up to the close of the 15th century the motive power in clocks was always obtained by means of weights; the invention of the coiled spring rendered them portable.

[31]

Whatever be the date or origin of the watch or portable clock, certain it is that there was mention made of such an instrument as far back as 1494, by Gaspar Visconti, an Italian poet, who in a sonnet describes 'Certain small and portable clocks made with a little ingenuity, and which are continually going, showing the hours, many courses of the planets, the festivals, and striking when the time requires it.' The sonnet is, as it were, composed by a person in love, who compares himself to one of these clocks. One of the earliest places of watch manufacture was Nuremberg, and foremost among its horologers was Peter Hele, who was thus described by Doppelmayer in his 'History of the Mathematicians and Artists of Nuremberg.'

[32]

'Peter Hele, a clockmaker, was everywhere esteemed a great artist on account of the pocket-clocks, which, soon after the year 1500, he first made in Nuremberg, with small wheels of steel. The invention, which with great justice may be ascribed to him, being something new, was praised by almost every one, even by the mathematicians of the time, with great admiration. He died 1540. On this subject Johannes Cocclæus, in his Commentary on the Cosmographia of Pomponius Mela, published in Nuremberg in 1511, makes the following announcement:—"Inveniuntur in dies subtiliora, etenim Petrus Hele, juvenis adhuc admodum, opera fecit, quæ doctissimi admirantur mathematici, nam ex ferro parva fabricat horologia, plurimis digesta rotulis, quæ, quocunque vertuntur, absque ullo pondere, et monstrant et pulsant XL. horas. Etiamsi in sinu, marsupiove contineantur.'" This quotation from Cocclæus may be thus translated:—"Ingenious things are just now being invented, for Peter Hele, as yet but a young man, hath made works which even the most learned mathematicians admire, for he fabricates small horologes of iron fitted with many wheels, which, whithersoever they are turned, and without any weight, both show and strike forty hours,—whether they be carried in the bosom or the pocket.


[33]

Doppelmayer in continuation says: 'This, already so written by Cocclæus in 1511, shows in the clearest way, that pocket-clocks were made at Nuremberg many years

ago, and he has fairly attributed the invention of them to this artist, since it was the most deserving of admiration, and the newest of his time, and which will be considered as a Nuremberg invention; whence also clocks of this kind were for a long time called Nuremberg living eggs, because they at first used to make them in the form of small eggs, which name is to be found in the German translation in chapter 26 of a strange book which F. Rabelais has left behind him. Hence it is evident how erroneous it is to ascribe, as many do, the invention of small striking-clocks, as of these pocket-clocks, to Isaac Habrecht, a well-known mathematician who lived about the beginning of the last century, and dwelt at Strasburg, whereas our Peter Hele had made them in Nuremberg 100 years before.'

The art of watch-making soon extended itself over Europe, for we find that in France, in 1544, Francis I. enacted a statute in favour of the corporation of master clockmakers at Paris, to the effect that no one should be permitted to make horologes unless he should have been previously admitted into that society. Of the most antique watches there are some very interesting collections at the South Kensington Museum and other places,—originally brought together by private persons whose antiquarian knowledge has lit up the subject with wonderful interest. It would be impossible to furnish in a volume such as this, a regular series of such productions, showing the development of artistic skill in the embellishment and design of watches; we leave that duty to some future writer who shall prepare an *edition de luxe*, and show therein, in splendid colour-printing, all the beauties of enamelling on the precious metals, all the elegance, as well as perhaps the oddity, of design, which are to be observed in these highly-interesting works of art. We will, for the nonce, be content with interspersing our pages with a few examples, not perhaps of the highest quality in point of design, but yet worthy of notice, either as showing variety of form or as being made valuable by historical associations. One of the earliest specimens of very small watches which are now extant is the one given on the next page.

[34]

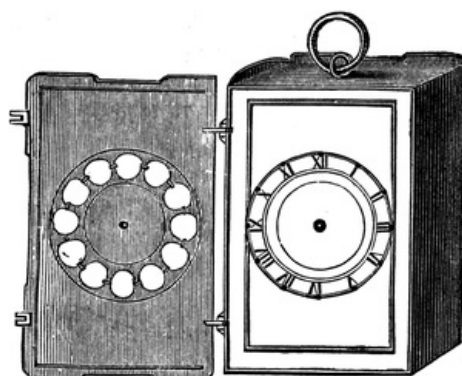

Ancient Watch, in form of a Book.

This little time-piece dates from the period when blacksmiths were watch-makers, or at all events when watch-makers were blacksmiths. The works are all of iron; the case was made, probably, before glass was used for such instruments, and it is not unlikely that this watch is of as old a shape as even the Nuremberg eggs. A more ornamental time-piece, of perhaps a somewhat later date, is the curious little instrument which is portrayed in our next illustration; the works of which are also of iron. It possesses the advantage of serving either as a clock or a watch, or as both, being of a portable size, and yet when set on a stand would serve as a pretty ornament to a drawing-room table. The bell at the top is so arranged that when the hand touches a trigger the hour is struck upon it, but the bell itself may be detached without any interference with the movement by which the time is kept.

[35]

[36]



**Ancient Table Watch,
with Bell for striking
(Temp. circa 1525).**

A clock was purchased by Queen Victoria at Strawberry Hill sale and is now at Windsor, which was a present from Henry VIII. to Anne Boleyn, and since from Lady Elizabeth Germaines to Horace Walpole. It is described by Walpole as a clock of silver gilt, richly chased, engraved and ornamented with fleurs-de-lys, little heads, &c. On the top sits a lion holding the arms of England, which are also on the sides. On the weights are the initial letters of Henry and Anne within true lover's knots, at the top 'Dieu et mon droit,' at the bottom 'the most happy.'

The emperor Charles V. (Henry's contemporary) was so much pleased with observing the movements of time-pieces, that it is related of him, that he frequently sat after his dinner with a number of them upon the table before him, and that even after his retirement to the monastery of St Just he still continued his interest in them. He endeavoured to adjust their movements and keep them in order, but, upon finding it impossible to make any two watches agree with each other in keeping time, he was induced to reflect how much more absurd it must be for a man to attempt to regulate the more varied and hidden emotions of nations in consonance with those in his own breast. Ancient watches used to strike the time, and we read of Charles V. and Louis XI. that, watches having been stolen from them in certain crowds, the thief was detected by their striking the hour.

[37]


In 1577 Moestlin had a clock so constructed as to make just 2528 beats in an hour, 146 of which were counted during the sun's passage over a meridian, and thus determined its diameter. The alarum or alarm is one of the earliest additions to the mechanism of the clock, and is still used in Dutch clocks. This contrivance took its origin from the circumstance of prayers being read at stated periods in monasteries by night as well as by day, such an invention being of course of much service in arousing the priest to perform his duties.

In 1631 the Company of Clockmakers was incorporated in England by Charles I., who granted them a charter prohibiting the importation of clocks, watches, and alarms. So that at this period Englishmen were sufficiently skilled in the production of horological instruments to consider their importation in the light of an intrusion. The Company consisted of a Master, three Wardens, and ten or more Assistants who had power to make by-laws for the government of all persons using the trade in or within ten miles of London. They were authorized to enter, with a constable or other officer, any ships, vessels, warehouses, shops, or other places, *where they shall suspect bad and deceitful works to be made or kept*, and if such were found they seized them in the King's name, and having proved their unworthiness, the objectionable works were broken up and destroyed. There are many instances mentioned of such 'searches' upon the Books of the Company, and although the practice has long become obsolete, for in these times of free trade no such restrictions would be tolerated, yet it would perhaps be found that some testing by a modern 'searcher' or tester would be of some protection to the public now-a-days, when thousands of watches are sold which, like Peter Pindar's razors, are intended

[38]

rather for the market than for use. The following are illustrations of some time-keepers of the end of the sixteenth and the beginning of the seventeenth century.

[39]

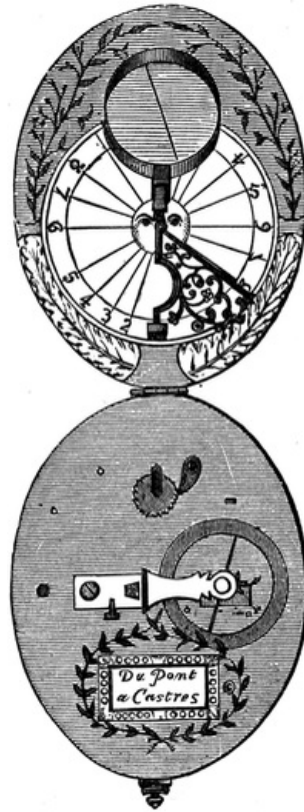

**Ancient Watch with
Dial, 1580.**

This is a very curious but not uncommon combination of the watch with the dial,—the latter being marked inside the watch-case and having a gnomon moving on a hinge so as to allow of its lying flat and being enclosed within the case when not in use.

[40]

Our next illustration is of one of the earliest examples of a round watch made in England, the date being 1593. It contains not only a dial showing the hour, but a sort of general calendar in miniature.



English Round Watch, 1593.

Of much about the same date is the following example in silver and brass. It is of the same style of time-keeper, and shows how our forefathers liked to know not only the time of day but the period of the month; and how they watched the moon's changes, and in a word made an almanac of their watches.

[41]



Oval Watch, 1593.

It was not an unusual thing for religious persons who used rosaries at their devotions, to add to their beads a miniature skull, with a view it may be to remind themselves of the frailty of life by way of stimulus to the preparation for the future state. When watches were invented the Memento Mori death's head was made into a watch-case, as in the illustration on page 44.

[42]



Ancient Ornamental Watch.

The Lauder family, of Grange and Fountain Hall, possess the *Memento Mori* Watch there engraved, they having inherited it from their ancestors, the Setoun family. It was given by Queen Mary to Mary Setoun, of the house of Wintoun, one of the four Marys, maids of honour to the Scottish Queen. This very curious relic must have been intended to be placed on a *prie-dieu*, or small altar, in a private oratory; for it is too heavy to have been carried in any way attached to the person. The watch is of the form of a skull: on the forehead is the figure of Death, standing between a palace and a cottage; around is this legend from Horace: '*Pallida mors æquo pulsat pede pauperum tabernas Regumque turres.*' On the hind part of the skull is a figure of Time, with another legend from Horace: '*Tempus edax rerum tuque invidiosa vetustas.*' The upper part of the skull bears representations of Adam and Eve in the garden of Eden, and of the Crucifixion, each with Latin legends; and between these scenes is open-work, to let out the sound when the watch strikes the hours upon a small silver bell, which fills the hollow of the skull, and receives the works within it

[43]

when the watch is shut.



Old English Calendar Watch.

[44]



**'Memento Mori' Watch
belonging to Mary Queen of
Scots.**

Nor about this time was the opportunity omitted of inculcating by means of pictorial watch illustrations, that Scriptural knowledge which was in the less educated times not so much taught by books as by pictures. The watch case given on the following page is of about 1600. It is obviously of English workmanship, and is a fair specimen of the period,—it may be, indeed, that, looking at it, one may well doubt whether art has much advanced in watch-ornamentation during the last 270 years or so.

We give our next illustration as another example of an ancient Table Watch. This watch has a revolving dial at the top, by means of which and the fixed point or hand the time is indicated (page 46).

[45]



Watch-case (circa 1600).

Such was the state of clockwork when Galileo, the great astronomer, then a medical student at Pisa, happened to discover, while gazing up at the roof of the cathedral when he should, perhaps, have been devotionally occupied, that the lamps suspended therefrom by chains of equal lengths, swung, and made their vibrations in long or short arcs, in almost the same space of time,—a fact, the truth of which he ascertained by the beats of his pulse.

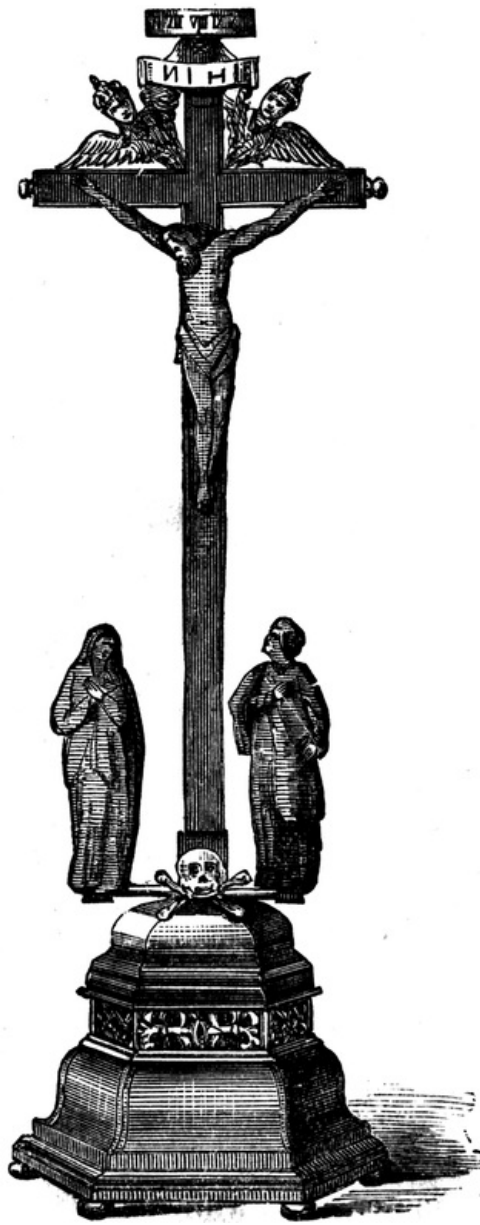


Table-Watch, circa 1630.

This isochronal property, as it was called, was described in a treatise which he published at Paris in 1639, entitled 'L'Usage du Cadron ou de l'Horloge physique universelle.' The first application which Galileo made of his discovery was the professional one of testing the rate and variations of the pulse, and it is even denied that he did more than suggest its applicability to clockwork.

[47]



**Ancient Silver Dial
and Gold-cased
Watch. One hand.**

The honours of the invention of the pendulum-clock have been contested by Vincentio Galilei, son of the great astronomer, who is said to have made a pendulum-clock at Venice in 1649, and Christian Huygens, a noted Dutch mathematician, who (in his excellent treatise, 'De Horologio Oscillatorio,' which was the foundation of most of the subsequent improvements in horometrical machines) clearly shows that he had constructed a pendulum-clock previous to 1658. His reputation will be

somewhat obscured, however, if we yield to the claims of an Englishman named Richard Harris, an ordinary workman, who, it is said, invented the pendulum-clock which was fixed in the turret of St Paul's, Covent Garden, in 1642, and which is generally believed to have been the first pendulum-clock in Europe. The pendulum when first applied to clocks was suspended by a silken cord, and the arc described by the bob or weight at its end was a segment of a circle, but it being found that this was in opposition to scientific knowledge, and that the curve described by it should properly be part of a cycloid or oval; Huygens tried to remedy the error by causing the silk cord in its motion to side or strike against a curved piece of brass, but he thereby caused a greater error than he corrected. Dr Hooke afterwards suspended the pendulum by a thin flexible piece of steel, the bending of which, as the pendulum swings from side to side, produces the required cycloidal motion. In 1658 Dr Hooke invented the Anchor Escapement which is still in use together with the flexible spring to the pendulum above described. Before, however, we proceed further with our historical summary of the progress of watch and clock making, it may be well to introduce here two illustrations of the watches worn by two of the most eminent Englishmen of about this period.

[48]

[49]



Ancient Box Watch.

[50]



The Watch of Oliver Cromwell.

The following watch was made about 1625 by Jonn Midwall in Fleet Street, who was Warden of the Clockmakers' Co. in 1635, and died about 1638. It is one of the early examples of a fob-watch. The case is of plain silver, fitted with glass over the face, and the chain of the same metal. The family crest of Cromwell was a demi-lion

holding a ring in its paw, but the Protector substituted for the ring the handle of a tilting spear, as engraved on the chain; the Cromwell arms on the reverse, and the initials O.C., certify to its genuineness. The arms as engraved and the crest are identical with those on the banner used at the Protector's funeral. The silver seals which were at one time attached to this chain are now absent, but they were a few years back in the possession of some descendants of the Cromwellian family, who allowed Sir Charles Fellows to take impressions of them. The watch, as it is here engraved, remained for upwards of a century in Holland, was there purchased by an English nobleman who presented it to his godson, and by him given to Sir C. Fellows, who believed that it was probably worn by Cromwell from 1625 until his death in 1658. In shape it reminds one of the Nuremberg egg watch. The following is an excellent example of an early watch-case of the round shape still in use.

[51]



[52]

Early Ornamental Round Watch-case.



John Milton's Watch, made by William Bunting, London, 1631.

The history of this watch is somewhat singular. From inscriptions which appear upon it, it seems to have been made by William Bunting, (whose name is entered upon the books of the Clockmakers' Co. as elected to their court in 1645, he being then resident in Pope's Head Alley, Cornhill,) in 1631, and presented to John Milton in the same year, which was the date of the poet's leaving Christ's College, Cambridge, and taking up his residence with his father in Horton, Buckinghamshire, he being then about 23 years of age. From that time down to the early part of the present century we have no record of the watch or its possessors, but that in 1819 it was bequeathed by the last surviving member of an old family in Baltimore in the United States, who had treasured it for some generations, to some old ladies residing

[53]

near London, the bequest including also a number of coins of the reigns of Charles the 1st and 2nd, some medals of Fairfax and others, as well as a few rings, but nothing of a later date. The chest which contained all these relics safely arrived in London, and not long after was, with its contents, offered for sale to an eminent chronometer-maker. The coins and medals being in an excellent state of preservation were soon disposed of at high prices, but the watch being only silver gilt, and steel-faced, was considered to be of little value, and a few shillings only were allowed as a fair price for it. It was put into a drawer in its discoloured state and there remained until 1828, when for the first time the inscription on the face of it was discovered upon its being accidentally cleaned up, and it was then presented to Sir Charles Fellows, well known for his connoisseurship in such matters, and as a collector of ancient time-pieces. The maker's name upon the inside of this watch is thus given: 'Gulielmus Bunting, London, 1631.' Sir Charles Fellows died in 1860 and bequeathed this one watch only to the nation; but his relict, Lady Fellows, who died in 1874, left the whole of the celebrated collection of ancient watches which her husband had brought together, to the British Museum.

[54]

In 1675 Tompion, under Hooke's direction, made a watch with a spiral balance for Charles II. Up to this period watches had but one hand and only pointed the hours, but the spiral pendulum spring having been applied to the balance, it regulated the oscillations with some nicety, and the minute wheel and hand were soon after added.

A watch was found upon Guido Fawkes when he was arrested for the Gunpowder Plot, which had been purchased by Percy and himself the day before 'to try conclusions' for the long and short burning of the touchwood with which he had prepared to set fire to the train of powder.

The following is one of the earliest examples we have met with of an




**Early Watch, with
double case.**

It is apparently of French make, date of 1660, and is a remarkably neat and small specimen of the watches of that time.

The annexed illustration is a curious example of a watch of the date of 1580, to which a pendulum was added in 1670, and which is still capable of keeping time.

[55]

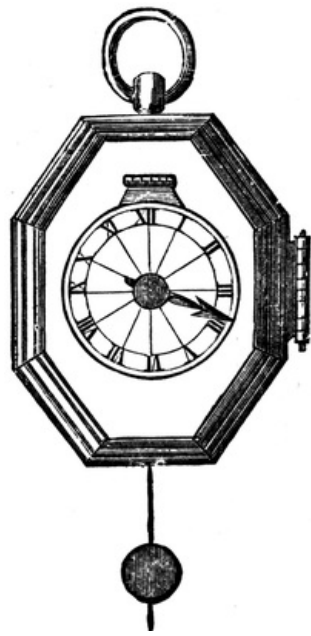

**Ancient Watch with
Pendulum.**

Our next illustration is another specimen of antique design and ornamentation.



**Ancient Brass Watch-case with
lid protecting Dial.**

In 1676 Barlow, a London clockmaker, invented some mechanism whereby a person at night might ascertain, in the dark, the hour last struck, by pulling a certain part of it, and this contrivance gave the name of *repeater* to all time-pieces in which it was used. For this invention Barlow tried to obtain a patent, but he was opposed by Daniel Quare and the Clockmakers' Company, who said that Quare was the original inventor. The question was tried by James II., and the decision given in favour of Quare. The following memorandum was entered upon the books of the Company with reference thereto. '1688, Sep. 29.—Be it remembered that in pursuance of the order of the Court of the 8th day of February, 1687-8, and according to the order of the Court of the 5th March, 1687-8, the patent endeavoured to be obtained by one Mr Edward Barlow, a priest, and to be granted to him by the king's majesty for his sole making and managing of all pulling repeating pocket-clocks and watches, he pretending to be the true and first inventor of that art and invention, was by diligence and endeavour of the Master, Wardens, and Assistants of this Company, with great charge and expense, which was borne by and out of the stock of the Company, very successfully prevented, and upon the 2nd March, 1687-8, ordered by the king in Council not to be granted.'

[56]

[57]

In 1695 Tompion invented the cylinder escapement with horizontal wheel, but this was not brought into general use until some time after, when it was much modified. It was, however, a very valuable invention, and exercised considerable influence upon the shape of subsequent watches, inasmuch as it dispensed with the vertical crown wheel, and permitted them to be made more flat and therefore more conveniently portable.

We now come to the time when the use of jewels was first invented and applied; and as these, by being so hard and uninfluenced by friction as to allow the pivots to play without wearing away,—as metal would do by constant action,—afterwards gained for the English peculiar fame as manufacturers of watches, we shall be excused for enlarging upon this point. About the year 1700 Nicolas Facio, a native of Geneva, having invented the use of jewels in watches, and failed in his attempt to persuade the Parisian watch-makers into the adoption of his notions, came to London. In May, 1705, he and two other watch-makers, Peter Debaufree and Jacob Debaufree, obtained a patent for his invention to extend over fourteen years. In December, 1705, he petitioned, as we shall presently see, to be granted a more extended term, and then the Clockmakers' Company opposed the application upon the ground of the invention not being a novel one, and in proof of their statement produced the watch, of which we give an illustration, as made by Ignatius Huggefurd, a member of their own Company, some time before the application of the pendulum-spring. As this watch had a large amethyst mounted upon the cock or pivot of the balance-wheel, the Committee of the House of Commons were induced to decide against Facio's petition and to throw out his Bill.

[58]



Ignatius Huggefurd's Original Jewelled Watch.

This watch has since then obtained an extensive historical reputation, and it is preserved in the archives of the Clockmakers' Company as one of their most valuable treasures, for it is the earliest known English jewelled watch, and is the identical instrument produced before the House of Commons Committee, as evidence to upset, and which did upset, poor Facio's claim for an extension of patent. Alas, for ancient reputations, it has been but recently discovered that Huggefurd's watch was but a fraud, and that the jewel on the cock which deceived the Parliamentary Committee into supposing that Ignatius Huggefurd, an Englishman, had applied jewels to watches long before Facio had been heard of, *has nothing to do with the working* of the watch. The jewel has been merely stuck on, just in the place where a jewel should be; but as it is only fixed to the surface of the brass and no pivot plays in the jewel, it may be averred that the amethyst has no more to do with the movement of the watch than the silver ornaments on the watch-case. It is clear by the words in Facio's petition that his application of jewelling to watches was not merely done with the idea of ornamenting them,—in that there would have been no novelty,—and it seems probable that the amethyst would have been placed upon the face of the watch if the object of inserting it anywhere had simply been ornamentation; to speak plainly,

[59]

[60]

none other than a fraudulent purpose could be served by its being placed where it is. It is, we fear, not impossible that the jewel was placed there at the instance of some of the members of the Clockmakers' Company, who, being perhaps jealous of the foreign invention, and fearful of its effects upon their own private trade, were still unable to prevent the grant of a patent, in May, 1703, for fourteen years to the inventor. But by December of that year, when application was made for the extension of the patent, they had had time to consider affairs and to prepare their opposition. We may believe this watch to have been Ignatius Huggefords, and to have been all that it was sworn to be by the members of that Company, but, when we remark that neither is any mention whatever made by them, nor, as far as it appears, any question asked of them before the Parliamentary Committee as to the jewel being upon the cock during the whole of the time of its being in their possession, we cannot but arrive at the conclusion that the jewel was placed upon Huggefords old watch—the date of which could be shown—at the order of some of the members of the Clockmakers' Company with the purpose of defeating the patent, and that the Committee of the House of Commons were not as careful as they ought to have been in inspecting the jewel, for if they had, they must have seen the want of connexion between the amethyst and the pivot, which, it was pretended, was working in it. The probability is that at this time our English watch-makers scarcely knew how to apply a jewel, or otherwise they would have inserted the pivot in a proper manner. The story is anyhow a very extraordinary one, for, supposing the Clockmakers' Company to be innocent of conspiracy on the subject, it must have been a miraculously curious whim which possessed old Huggefords to insert a jewel as an ornament in a place where it would not be seen, and still more wonderful that it should, sham as it was, be placed exactly where it should suit the purpose of after-litigation. Of course there can be no imputation arising out of this incident to affect the members of the Clockmakers' Company of the present time, for they are no more answerable for what was done above a century and a half ago than the Parliament of to-day is to be blamed for allowing the execution of Charles I., or for enacting the laws which led to the loss of our American colonies.

[61]

[62]

After the invention of jewels for watches came a still more important discovery.

Since 1530, when Gemma Frisius first proposed to ascertain the relative longitude of any place or ship at sea, by means of an horological machine for indicating the time of the first meridian, the subject had excited the attention of most of our philosophers, but unavailingly, as there was then no chronometrical instrument, upon which reliance might safely be placed. Huygens, in 1664, had contrived a time-piece actuated by a spring and regulated by a pendulum, but the pendulum was affected by the tossing of the ship, and by a change of temperature, as well as being subject, as was afterwards discovered, to a variation in weight depending on the parallel of latitude. The Academy of Sciences at Paris proposed, in 1720, a reward for the best paper in reply to the question:—'What is the most perfect method of preserving on the sea the equable motion of a pendulum?' The reward was given to a Dutchman named Massy, but his plan was not carried out. An English watch-maker named Henry Sully happened to be about this time in Paris directing a large manufactory of chronometers, and he presented the French Academy with a marine time-keeper of superior construction to the time-pieces of that period, and accompanied his gift by a memoir describing it. Whilst still engaged in the study of his art, Sully, who was a clever man, unfortunately died, and the opportunity of advance seemed to have passed away.

[63]

About this time Graham invented the Mercurial Compensation pendulum, which consisted of a glass or iron jar filled with quicksilver and fixed to the end of the pendulum rod, which, when heat lengthened the rod, expanded simultaneously the quicksilver, and made the centre of oscillation to continue at the same distance from the point of suspension. He afterwards conceived a notion, which John Harrison subsequently worked out, of making a compensation pendulum (or a pendulum that should in itself contain the power of equalizing its own action, whatever the change of temperature), forming it of various metals. In 1726 Harrison invented what is

called the gridiron pendulum, composed of nine rods, five of steel and four of brass, which are so arranged that those which expand most are counteracted upon by those of less expansion. These two compensation pendulums, the gridiron and mercurial, are still in use, and with slight improvements are found to keep to time very accurately.

The period had now arrived for the making of marine time-keepers sufficiently accurate for nautical use, and styled chronometers because they are most accurate time-measurers. Their value to navigators, and the immense impetus which would by such instruments be given to the science of navigation, had long been foreseen, but there were many great difficulties in the way of obtaining a perfect chronometer. The sailor, before the invention of this instrument, could ascertain the latitude of his ship at sea, by observation of the fixed stars. Supposing these stars to have first appeared to him in the zenith, and at his next observation to be one, two, or three degrees south of the zenith, he would know that he had sailed just so many degrees north of the place in which he first observed them. It was not, however, so easy for him to compute longitudes, because the diurnal revolution of the earth causes each meridian to pass successively under the same stars. It was necessary to have an accurate time-keeper, and to set it carefully to the solar time of some port in the kingdom, whose longitude was well known. The time-piece might then be carried out in a vessel sailing abroad, and the computations made by means of it would prove most wonderfully exact and important. By simply observing the moment at which the sun reached his meridian, when of course it would be 12 o'clock at noon, solar time, and then noting the difference between the solar time thus ascertained and the time of the chronometer, the mariner would be able by calculating 15 degrees to one hour of time, or 15 geographical miles to one minute, to make out his longitude. For example, if the time-piece had been set to time at the meridian of Greenwich observatory, and if it be one o'clock by the time-piece when it is mid-day, or meridian by the sun, then the place in which the longitude is taken must be in long. 15 degrees east of the meridian of Greenwich, and if it be eleven o'clock by the chronometer when the sun attains his meridian, then the place must be in long. 15 degrees west of the meridian of Greenwich. It is not indispensably necessary, that every chronometer used for maritime purposes should keep time exactly with that of the Greenwich observatory, or of any other instrument of known excellence, provided always that its *rate* as seamen call it, or the daily loss or gain of the chronometer, is well ascertained, and so may be computed in the calculations to be made. The indispensable requisite of a chronometer, however, is that the daily loss or gain shall not vary materially from itself at different periods, or under the changes of temperature of different climates, and these qualities being found in an instrument of any shape or make, constitute a marine chronometer.

It will be generally obvious of what immense and universal importance it was for men who 'go down to the sea in ships and do their business on the great waters' to be provided with a chronometer, and so be enabled to calculate with a great degree of nicety,—almost as a traveller by land learns his distances by milestones and finger-posts,—the precise position on the wide ocean of the vessel they are engaged in navigating. So impressed was the British Parliament with the value of such an invention, that as early as 1714, in the reign of Queen Anne, a reward of £10,000 was offered, for any method for determining the longitude within the accuracy of one degree; of £15,000 within the limit of 40 geographical miles; and of £20,000 within the limit of 30 geographical miles, or half a degree, provided such method should extend 80 miles from the coast. In 1736 John Harrison invented the first chronometer, for which, after having added many improvements, he received the gold medal of the Royal Society in 1749. He still continued to persevere in improvements in his instrument, and at last applied to be allowed to test its powers in such a voyage as might permit of proof of its value. After some time his application was granted, and his son, William Harrison, embarked at Portsmouth, Nov. 18, 1761, for Jamaica. After eighteen days sailing the vessel was computed to be 13° 50' west of Portsmouth, when the distance calculated by the watch was 15° 19'. When the vessel arrived at Madeira, on the 9th of December, it was found that the reckoning

[64]

[65]

[66]

was corrected by the time of the piece, about a degree and a half. From Madeira to Jamaica the reckoning was amended 3°; and at the several islands where the ship touched the known longitudes agreed very closely with those indicated by the chronometer. Upon having returned again to England after a very stormy voyage, the instrument underwent examination, and its entire error amounted to 1^m. 53^s. 5. Harrison, on this report being made, obtained from Parliament a reward of £5000. A second experiment was afterwards made in 1764, in March of which year Harrison left Portsmouth with his instrument on board the *Tartar* for Barbadoes. He had previously conveyed to the Lords of the Admiralty his statement of the rates at which his chronometer went, and the extent to which it was affected by change of temperature. On May 13th the vessel arrived at Barbadoes, and it was found that the amount of the daily deviations from mean time was only 43^s. in excess. He returned to England after an entire voyage of 156 days, and found that, allowing the gain of one second per day as stated by him in his sealed 'rate,' the whole gain was only 54^s. Harrison then was examined by a committee appointed for the purpose, and, having explained satisfactorily to them the principles of his instrument, he received another £5000. A trial was then made by another person with a chronometer made upon Harrison's plan, and this experiment also terminating favourably, the remaining parliamentary reward was paid over to Harrison, amounting in all to £20,000, a sum which was still further increased by gratuities from the Board of Longitude and the East India Company.

[67]

[68]

Harrison's improvements in time-measuring were of considerable importance, as any one may readily conceive, but he was sufficiently candid to acknowledge that the balance, balance-spring, and compensation curb, as then used, were not simultaneously affected by changes of temperature, that small pieces were more readily affected than large ones, and pieces in motion sooner than pieces at rest, whence he concluded that if the provision for heat and cold could properly be arranged in the balance itself, as in his gridiron pendulum-clocks, the time might be better kept.

Harrison's suggestion of a compensation balance in lieu of a compensating curb, incited Peter le Roy, a native of France, to the consideration of the question, and ultimately to the invention of a balance acted upon by mercury and alcohol. The compensation was effected by the balance itself, which, carrying the two thermometers, adjusted the mercury nearer or farther from the centre of the balance, according to the state of the atmosphere.

About this period there was considerable emulation exhibited, both here and on the continent, upon the subject of time-measuring. Sully had aided largely in the advancement of the art of watch-making in London and Paris. Berthoud, Julien, and Pierre le Roy made many ingenious propositions, and amongst others the invention of the detached escapement is attributed to the last-named.

[69]

In England we find the names of Arnold, Earnshaw, and Mudge associated about this date with the greatest improvements in chronometry, and as being those to whom prizes were at different times awarded by the Board of Longitude. In fact, few great inventions have since been made in the art, and our present high position as chronometer-makers is mainly due to the skill, energy, and perseverance then exhibited.

It would be superfluous to give any detailed description of the many valuable advantages derived from the science of horology, to which indeed all arts, sciences, trades, and callings are considerably indebted, and will probably be still more so in proportion to the increase of the use of steam-power and electricity. As by means of these recently-discovered powers mankind are enabled to compress into a day what would previously have required weeks and even months to accomplish, so must they regard with higher esteem, as these improvements are extended, the science by means of which they may divide and subdivide the precious minutes which are sufficient to perform so much. It will be worth while by way of illustration to point to the assistance given by horology to astronomical and nautical science. It is by means

[70]

of carefully-made and exact chronometers that we calculate the distance and relations of the various heavenly bodies to ourselves and to one another. Having ascertained, by comparison, the rapidity of light and sound, and that the former travels at the rate of 192,000 miles per second, we discover that the light of the sun requires eight minutes to reach the earth, and thus compute the sun's actual distance from us. So also observing the number of seconds which elapse between the flash of lightning and the roll of thunder, or between the flash and report of a cannon, and remembering that in mild weather sound travels at the rate of 1123 feet, and in frosty weather 1080 feet in a second, we shall be able, on making allowances for the state of the atmosphere, to arrive at a tolerably correct conclusion as to distances. It is by means of a chronometer, though it be but a sand-glass, that the sailor uses his log-line at sea and finds the rate of his vessel's speed. His lead, enclosed in the log, or wood, is attached to the log-line, which has certain lengths called knots marked upon it for nautical miles, and according to the knots paid out in the half-minute of the sand-glass, so is the ship's rate of sailing, *i. e.*, if ten knots are passed in half a minute the vessel's speed is at the rate of ten miles an hour.

It would be both impossible and unnecessary to describe the various experiments in which it is of great consequence to measure time into minute proportions, the number of these increases with advancing science; it will suffice if we have made the subject sufficiently interesting to the general reader to induce him to inquire further into the details. It is only by such investigations that he will be enabled to give anything like a proper answer to the question 'What is Time?'

[71]

MODERN WATCHES:

[72]

THEIR VARIETIES AND MODES OF MANUFACTURE.

'He that would wear a watch two things must do,—
Pocket his watch and watch his pocket too.'—*Old
Maxim.*

The first possession of a watch by young persons of either sex is perhaps one of the most vividly retained of all their early memories. The sense of responsibility, of importance, which such a wonderful little piece of mechanism gives to them, the alacrity with which they thenceforth note the flight of time and compare the working of all other time-pieces, is remarkable. One of the first things usually done by the juvenile with his or her watch is, curiously enough, to challenge thereby the performance of the old-established time-pieces in the house,—even the infallible old Hall Clock, a very Nestor among clocks, does not escape scrutiny. Woe be to his ancient reputation if, when 'weighed by the new balances'—compensation or otherwise,—he be 'found wanting.' The yet unfledged urchin will, upon the evidence of his own newly-acquired chronometer, unhesitatingly expose and denounce the slightest delinquency of the antique time-piece, and pride and plume himself accordingly. At this time of day, when watches of a sound and durable kind may be had for a comparatively small sum, and when education commences so early, it may be supposed that youths attain earlier to years of discretion, and so rise to the dignity of watch-wearers sooner than their predecessors did. Anyhow, the value of time can scarcely be inculcated at too juvenile an age, nor can it be brought home to the mind of the pupil without providing him with the means of studying the operations of his own personal time-keeper. From the hour when such a gift comes into his possession until the latest day of his life a watch remains his indispensable mentor, and, literally, his bosom-friend. There are few, perhaps none, who can look upon the face of an old watch, their day and night companion for many years, without associating it with the bygone times when it reckoned off for them their moments of pain or anxiety, their joys and sorrows. There is perhaps scarcely any memento of a friend or relative so suggestive as that semi-living object which has been his constant friend for so long, the chief valuable of all his 'portable property.'

[73]


Our Old English popular rhymes and songs have frequently been pointed with

witticisms directed at the care with which watches have been guarded, or the dexterity with which they have been filched away. Who can overlook the evergreen old dramatic joke, of which the point consisted in connecting the time-teller with the name of the ancient street-guardian; *e.g.*:—

'I knocked him down, then snatched it from his fob.
"Watch, watch!" cried he, when I had done the job;
"My watch is gone!" said he: said I, "Just so,
Stop where you are, watches were made to go."



The Horizontal Watch.

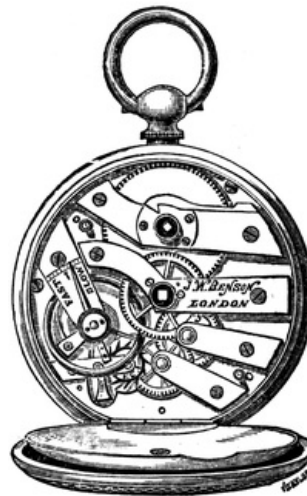


The Skeleton Lever Watch.


Who can forget Dickens's description of the watch of the wonderful Captain Cuttle, which, if you set so far forward at night and so far backward in the morning, was asserted to be 'a watch that would do anybody credit;' or again, how can we omit mention of that earlier Dickensian figure, mentioned by Sam Weller, wearing his enormous watch with so much happy fearlessness, his seals dangling from his fob, the continual temptation and despair of eager pick-pockets, whose ineffectual efforts to abstract the watch from such a tightly-protuberant stomach, were the never ceasing delight of its jolly proprietor? Who shall narrate the characteristics of the various fashions in watches, and the trinkets that were worn along with them, the manners of the fine gentlemen who carried two at a time soon after swords were exchanged for walking-canes, and when pantaloons anticipated the easier but less graceful trowsers? Snuff-boxes, bag-wigs, pig-tails, high cravats, shoe-buckles, have all gone more or less out of fashion, but the watch is a perennial, which may indeed change its outer-casing and its decorations, like man himself, but knows no period of absolute disuse since first it started into being.

[75]

[76]

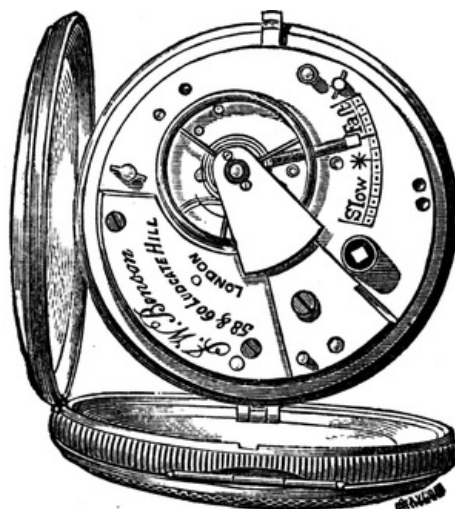

**The Full Plate Patent English
Lever.**

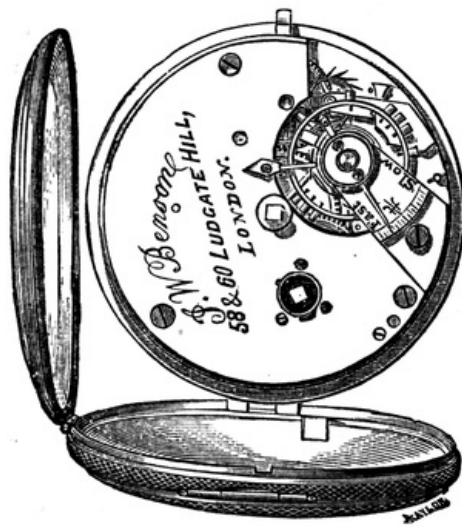

**Three-Quarter Plate English
Lever.**

From the time when the first Nuremberg egg-watch was produced, there has always been noticeable an endeavour to make pocket time-pieces more and more small and portable so far as they could be made so consistently with their durability. Sometimes the love of very minute workmanship has been carried to an extreme, but toy-watches of eccentric shapes and patterns are but the few exceptions to the general rule, which has settled that usefulness and convenience are best provided for within certain moderate sizes, and that of all shapes the round and flat are the most easily carried. The great object of the watch-maker's ambition is to produce a time-keeper minutely accurate, and yet not so delicately constructed that it cannot withstand the rough usage to which even moderately careful wearers subject it.

[77]


It has been estimated that the manufacture of and trade in watches annually in England, France, Switzerland, and America, amount to over £5,000,000 per ann.; and that in Switzerland alone there are 38,000 persons, one-third of whom are women, engaged in the manufacture. It is probable that even the immense number of new watches thus annually produced barely exceeds the growing requirements of the people, who, as they increase in intelligence and receive higher wages, soon learn the advantage of personally possessing a pocket time-keeper, and make it accordingly their first ambition to purchase one. The Watch Clubs which are formed in the various towns and rural districts throughout the kingdom enable this desire to be gratified at but small pecuniary inconvenience, inasmuch as payment is thus made in small instalments at fixed intervals, and the watch is bought with sums which might have been spent thoughtlessly and to no permanent benefit. This first lesson in thrift having been well learnt, and the result being so palpably beneficial to those who exercise it, has often laid the basis of a regular habit of economy.

The motive power in the watch is derived, not as in the clock from weights, but from a spiral spring called THE MAINSPRING, set in a drum or barrel, and any inequality in the pressure of the spring is fatal to regular time-keeping. A highly tempered and finished spring is a primary requisite in watch-making; in order to provide for the uniform transmission of motive power from the barrel throughout the train to the escapement, the fusee and chain are used, the fusee being a hollow-sided cone, and the chain round it. When the spring is wound up its force is of course greatest, for the chain is then acting on the smallest end of the fusee. The proportions of the barrel to the centre wheel, and the size of the teeth in that wheel, have all to be carefully planned, and adjusted to one another, and these all again to the moving of the hands upon the dial.

[78]

The ESCAPEMENT is one of the most important parts of the mechanism of a watch. It may be one of either of the following.

The *Verge* escapement, as applied to Watches, will be seen annexed, A, part of the balance; *b*, the verge body; C, C, the pallets; D, the escape-wheel; E, escape-wheel pinion. The verge or arbor B of the balance has two pallets, C, C, which stand out at




Verge Escapement.

right angles, so as to be acted on alternately by the sloping teeth in the opposite sides of the crown or escapement-wheel, c.


The *Horizontal* escapement, on the following page, so called because of the escape-wheel acting horizontally to the axis of the balance. This invention was perfected by Graham, after the death of the inventor, his master and friend, Thomas Tompion. *a*, the escape-wheel, having pins or stems rising from it, on the tops of which are teeth of a wedgelike form, of such a length as to permit little freedom within and without the cylinder *b*, which is firmly fixed to the balance *c*. Although *b* is one piece, the two edges of the hollow part serve as distinct pallets, inasmuch as they receive alternately, during each vibration of the balance, an impulse from the curved outer edge of each tooth in succession; and as the wedge-shaped tooth passes from the pallet, the coming tooth falls on to the circular part of the cylinder, and there remains until the return of the balance, when that tooth which had previously rested on the circular portion of the cylinder, comes upon the edge or pallet, gives impulsion to the balance *c*, and falls upon the concave portion of the cylinder, and there remains until the balance again returns, when another impulse takes place, and so on in succession. Watches having the cylinder escapement were not known in France till the year 1728, when Julien le Roy obtained one of them from Graham.

[79]



Duplex Escapement.

The *Duplex* escapement is of a very peculiar construction, and nearly approaches the chronometer; it is probable that it was originally invented by Dr Hooke, although, as we now have it, it came from the hands of Tyrer. It is seen in our illustration. *A*, the escape-wheel; *B*, the escape-wheel teeth; *C*, the balance; *D*, the pallet of impulse; *E*, the ruby roller; *F*, a notch in ditto; 1, 2, 3, cogs or upright teeth on the rim of the escape-wheel. The balance is supposed to be turning downwards towards the right, the tooth of the escape-wheel just resting against the ruby roller.




Horizontal Escapement.

When this (which is called the return) vibration is complete, the balance, by the strength of the hair spring, is carried in the opposite direction, and as the notch *F* passes the tooth of the escape-wheel, this latter is enabled to pass the roller, and the upright tooth or cog falls upon the pallet *D*, and thus gives impulse to the balance. The next straight tooth of the escape-wheel is now resting against the roller *e*, and the same operation again takes place. This escapement is much superior to the horizontal, and is almost independent of oil. It can carry a balance of much greater weight, and when well made performs admirably. Duplex watches, however, should never be selected by persons who are accustomed to ride on

[80]

horseback, as these instruments are liable to be affected by any sudden motion. Even the stepping quickly from a vehicle may stop them, and yet the escapement be as perfect as possible. They are only adapted for persons of very quiet habits. Thomas Mudge, in the year 1766, introduced an admirable invention, which, after many alterations and improvements, is now universally known as the '*Patent Detached Lever*' escapement, represented by




Lever Escapement.

—*a a* the escapement-wheel, *b b* the ruby pallets, *c* the lever, *d* the balance. On the axis of the balance *d*, towards the lever *c*, is a small disc of steel, into which is inserted a small pin made of ruby. This pin fits with great nicety into a notch or opening in the end of the lever *c*, upon which are firmly fixed the two pallets *b b*, into which are secured rubies very finely polished. The balance in its vibration on either side, carrying with it the steel disc and ruby pin, causes that pin to enter the notch in the lever and carry the lever with it, and at the same time, to draw the pallet from the tooth of the escapement-wheel *a*. Power being exerted upon this wheel by the

[81]

mainspring, the wheel tooth gets disengaged from the locking-face of the pallet, forces itself down the slopes of the pallet, and thus gives impulse to the balance. At each vibration the same unlocking takes place, but as soon as the wheel tooth falls from the slope, the opposite pallet is prepared to receive the advancing tooth of the escapement-wheel, and so on in succession beat after beat takes place. So excellent was this escapement considered a few years back, that chronometers were made upon the principle, and placed in the Royal Observatory for public trial. But since then many improvements have been made in it, so that makers are now enabled to produce a pocket watch, with the short angle lever escapement, which marks time at a steady rate of within four or five seconds weekly,—a rate which approaches so near to the time-keeping of a pocket chronometer, that unless the minutest exactness for some specific purpose is required, the last-named watch is all that can be wished for.

About the year 1780 was invented the escapement which is now denominated the Detached or *Chronometer Escapement* (see opposite page), the principles of which are the nearest approach to perfection, the impulse to the balance being given at the centre of vibration. A is the escape-wheel, B the escape-wheel teeth, C the roller let on the verge, or axis of the balance. This roller is a circle of polished steel, with a notch cut out of it, into one side of



**Chronometer
Escapement.**

which, D, a flat polished piece of ruby is inserted for the acting part. Below this steel roller, carried on the same verge, is a smaller roller of steel E), denominated the discharging pallet, having a sapphire fixed on its outer edge. F is a slender spring, which is screwed at I to the stouter one, having its fixture at the stud L, and polished away very thin at K, in order that it may bend readily, so as to cause very little resistance to the balance while forcing it on one side. G is a projecting piece, carrying an upright pin made of ruby, against which the wheel tooth B rests; at B is a small screw against which the spring L K G strikes, and thus prevents it from springing too far back. The action of these parts is as follows:—When at rest the circular edge of C is just clear of the two teeth of the wheel B, which cannot be set in motion while E and G remain quiescent; G rests against the screw at B, and the tooth resting against the locking pallet G, the escapement-wheel cannot turn. To set the chronometer going it is necessary to give it a rotary motion, which sets the balance in action. This causes the lower piece on the verge (called the lifting piece or discharging pallet) to strike against the end of the spring F, which, from its overlapping the curved end of the prolonged spring K G, pushes it back, and thus releases the pin or locking stone G from before the tooth of the wheel: that is, it unlocks the escapement-wheel, which is immediately set in motion by the force of the mainspring. The same vibration given to balance and verge brings the ruby pallet D round before the tooth B, which strikes against it and carries it round. The recoil of the spring F has now brought the locking pallet G to catch the tooth B, the escapement-wheel is thus again stopped. But the stroke of the tooth upon the face of the ruby pallet D has driven the balance on in its vibration till it is counteracted by the tension of the balance spring, which brings it back again; in this return vibration the lifting pallet E, by its curved back, pushes the slender spring F before it, and passes it without affecting K, G, which is stiff enough to remain unmoved by F, even when this strikes and rests against it in recoiling. The wheel, therefore, continues locked on the upright pallet G, and the vibration proceeds uncontrolled till the great pallet is again brought round, and the balance spring again checks the vibration, the above process being repeated. In this escapement, consequently, part of one vibration in one direction, and the whole of that in the other, is performed without the balance being in any way under the influence of the motive power; while the parts are so contrived that the impulse given by the tooth of the escape-wheel, affects in a very slight degree the natural motion of the balance. It can be easily understood that the lifting pallet E can pass the spring F in one direction without moving K and G, while in the other it carries E and G with it.

[83]

[84]

Several appliances have been from time to time introduced to correct the error in time-keeping caused by variations in the temperature, but none have

[85]

come into such general use as that known by the term '*Compensation Balance*,' invented by Thomas Earnshaw, of London, and for which he received a government reward. This balance, when properly adjusted, causes the watch to keep the same time whether the temperature be 32 deg. or 90 deg.; while without it a watch will show a considerable difference in time, on being merely transferred from the pocket to the dressing-table, where, probably, the temperature would not be so high.



Compensation Balance.

Our woodcut represents a balance of this kind; the divided rim A A, is composed of steel and brass run together by fusion, the more expansible metal, brass, being placed outwards, the result of which is as follows:—Heat elongates the pendulum spring, and thereby causes a slower vibration of the balance. The same amount of heat will also expand the metals composing the balance; but as the inner rim of steel does not expand so freely as the outer one of brass, the conflicting action of the two tends to draw the free end of the circular rim inwards towards its centre, and thus decreases in all but one direction the diameter of the balance. This decrease tends to *quicken* its vibration, and thus counteracts the effect of the elongation of the pendulum spring. In cold temperatures the pendulum spring is contracted, making the vibrations quicker, but the contraction of the brass rim draws the free end outwards, thus increasing its diameter, retarding its vibrations, and counteracting the effect of the contraction of the pendulum spring.

[86]

Many contrivances have been introduced to test the equality of compensation balances, but the majority have been abandoned from the circumstance that the heat was not equally distributed to the watches under trial. In pursuance of this object, an oven was invented, heated by hot water, which answers the desired end. It is an apparatus made of copper, two feet high, thirteen inches broad, and eight inches deep. From the top to the bottom, at the distance of fifteen inches, it is divided into two compartments. All around the upper one (except the front, which has a glass door through which the chronometers and watches are seen without opening it) is one inch of water. It has a chamber thirteen inches high, eleven inches broad, and seven inches deep for the reception of chronometers and watches. The water is introduced at the top in the same manner as a solar lamp is supplied with oil. The bottom compartment contains a jet of gas, which can at pleasure be regulated so as to keep the watch at any required temperature. The heat radiated from the inner surface of the chronometer chamber is thus equally distributed among the instruments under trial. A thermometer placed within the upper chamber indicates the temperature, and by this simple apparatus a watch can be regulated with the greatest nicety to suit the particular climate into which it may be taken.

[87]

The DIAL AND HANDS should be sufficiently in contrast one to the other to show the time at a glance. Dials are sometimes made of gold or silver, but these are not so distinctly seen as white enamelled dials, with black figures or numerals, and dark blue steel hands; the enamelled faces, although, perhaps, more brittle than gold or silver dials, are therefore in greatest request. Up to a comparatively recent date the seconds' hand was placed upon the level face of the watch, but sunk seconds are now everywhere in use, even in the cheaper sorts of watches. The chief objection taken to the sunk seconds is that it disfigures the dial by breaking the uniformity of the numeral letters, the VI being of course obliterated to make room for it, but this obliteration seems of smaller consequence than the confusion which may arise from the use of longer seconds' hands and their being at any time mistaken for that of the hour or minute.

The JEWELLING of a watch is an important part of its manufacture, inasmuch as it is by means of jewels that durability is chiefly secured. Watch pivots would rapidly wear out the metal in those parts in which there is continual friction, and jewellery has therefore become general. The watch-maker uses for his best watches a peculiarly hard kind of ruby, which has been known to withstand the wear and tear of the best part of a century without showing symptoms of yielding, whereas inferior jewels are perhaps scarcely so hard as the best tempered metal.

[88]

The FRAME, usually of brass gilt, sustains both ends of each axis, and is now

principally designed to fit a full-plate movement or a three-quarter-plate movement. The former is undoubtedly the more simple construction, but with considerable disadvantage in taking to pieces the watch and putting it together again when repairs are needed. The examination of the escapement in a full-plate watch, and the cleaning, or altering, or oiling which may be needed, cannot be done without taking the whole movement to pieces. The three-quarter-plate movement is not only preferable on account of its superiority in respect to solidity, and the economy of labour in its manufacture, but from its being flatter than the full-plate watch, and allowing of repairs being more easily made.

The WATCH-CASE, which used to be of various materials, such as tortoiseshell, pinchbeck, or one of the precious metals, is now almost universally of gold or silver. Silver cases are invariably of the standard required by the law and stamped accordingly; gold cases vary in fineness,—some being made and stamped of 9 carat gold, but the best for wear, and as such preferred by the best makers, are of 18 carats, and are stamped as such with the hall mark, usually in three or four places,—on the bow, the pendant, and the inside of the case. Much depends upon the care with which this part of a watch is finished, for an ill-fitting case admits dust which renders frequent cleaning necessary, and prevents accurate time-keeping. After the casemaker has constructed the case it has to pass through several hands before it is completed,—for instance, it is one man's work to fit the works to the case by making the joint at the 12 o'clock and the bolt at 6 o'clock, and to supply the wheels to propel the hands; it is another's to perform the part of engine turner, and to mark the case with those curiously intricate lines whose wonderful precision cannot be secured by mere hand-work, but by a combination of mechanical and human labour; another's to finish the joints, or, as the uninitiate would perhaps call them, the hinges; and last of all the fitter of the case with springs, and polisher to give the necessary finish. In the same way has each part of the mechanism of the interior passed through a series of workmen's hands. Nearly every wheel and pinion has been separately made by men whose entire time is given to the perfecting of their several branches of labour, the subdivisions of which and their ramifications would need many lengthy chapters of description, to do them justice. The escapement is of itself a distinct department requiring a number of co-operating hands, from those which first shape the metal to the balance-maker working in brass, steel, or gold, and the final adjustment of the escapement-maker. The chain, the spring, the jewellery, the brass-work, the engraving, the gilding, have each their separate history, some of them being brought from one district and some from another, to be put together in the watch manufactory, which is finally to produce them unitedly as an entire watch. Division of labour provides a larger amount of skilled work, and a more satisfactory result, than any other method. The workman whose entire life is spent in making the head of a pin or in fixing it on, will do his work better than the man, however clever he may be, who should attempt to make the whole pin; and not only is the work thus better done, but it is done by combination much more expeditiously and cheaply. All that the watch-manufacturer can do by way of choosing his materials is, however, of course, but antecedent to his own work of actual construction, of finishing, examining, and regulating. He is to the watch what the architect is to a house; the latter is none the less the rearer of the structure because he did not himself make the bricks, or saw the timber, or mix the mortar. Each subordinate brings certain materials to the hand of the constructor, and he combines them, and gives them their places, he turns them into shape and produces them as a perfect whole. So the watch-manufacturer, instead of going himself back through the various stages of work which in Nuremberg-egg time had, perhaps, all to be done by one pair of hands, chooses, adapts, combines the labours of hundreds of busy collaborateurs, all of whom have made portions and pieces,—he alone makes the Watch.

COMPLICATED WATCHES are so called because besides the ordinary watch movement they possess other mechanism more or less complicated, by means of which they can indicate special portions of time,—as for instance the *Chronograph*, which marks on its dial the fifth of a second; the *Quarter*, and *Half-Quarter*, and *Minute Repeaters*, which furnish the time in the dark to within a minute, and are invaluable to invalids


[89]

[90]

[91]

and blind persons; the *Clock-Watch*, which strikes the hours even in the pocket; the *Clock-Watch Repeater*, which strikes and repeats; the *Independent split Centre Seconds*, and *Fifth Seconds Watch*, which shows (by comparing the one with the other) the lapse of time to the fifth of a second; the *Perpetual Calendar Watch*, which shows the day of the week and of the month, the name of the month, the phases of the moon, &c.; the *Perpetual Calendar Repeating Watch*, which in addition to the calendar shows by a repeater the hour, quarter, and minute; and the *Meridian Watch*, which shows the time of day in any given number of places in any part of the world. A few words descriptive of the peculiarities of each of the above complicated watches will be necessary here, and observing the sequence as above, the following brief particulars will perhaps be sufficient for ordinary reference, or for being kept in memory.

[92]

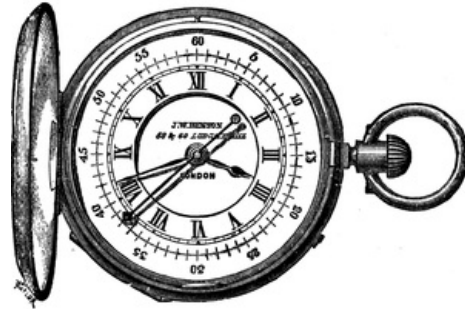

The CHRONOGRAPH is undoubtedly the most perfect instrument yet invented for marking the exact time occupied by certain rapid movements or events or performances,—and is therefore well adapted for astronomical and medical observations, for timing machinery, for indicating the speed of a race, and of similar quick events even to the tenth of a second. It consists of an ordinary quick train lever movement on a scale sufficiently large to carry the hands for an 8-inch dial. The peculiar feature of the chronograph is its second hand, which is double, consisting of two distinct hands,—the one lying over the other. The lower of the two is furnished at the tip with a small reservoir having an extremely small orifice below; over this orifice the point of the upper hand is bent so as to fall exactly upon the puncture, and to convey through it, as with a pen, the ink held in the reservoir. The mode of operating with the chronograph at a race has been thus described. 'The chronograph is held firmly in the left hand of the operator, who watches the starters, but need not trouble himself to keep at the same time an eye upon the dial. At the moment of the start he presses the finger or thumb of his right hand gently upon the button of the pendant, and instantly a black dot is deposited on the dial, and—the operator being ready to touch the button at the precise moment of the finish, and thus to complete what we may call the chronogram of the event—the exact length of the race is registered, even to a decimal fraction of a second, and an indisputable record written by the instrument itself in black and white. The chronograph, it should be mentioned is, apart from its chronographic mechanism, an excellent time-keeper, and may be worn as an ordinary watch, being the same size as a gentleman's lever watch.

[93]

REPEATING WATCHES are now made so as to require no key. They are constructed with a lever or chronometer escapement, and are known according to their method of repeating,—the ordinary *Repeater* strikes the hours and quarters,—the *Half-quarter Repeater* strikes the hours, quarters, and half-quarters,—the *Minute Repeater* strikes hours, quarters, and minutes. The first tells the time in the dark or to the blind person to within a quarter of an hour, the second tells it within seven minutes and a half, the third tells it to the minute.

[94]

The CLOCK WATCH and CLOCK REPEATING WATCH are also made so as to need no key. They strike the hours and quarters while being worn in the pocket, and have not only the two trains of wheels for going and striking as in a clock, but a third train provided for repeating purposes. Both mainsprings are wound up by the same winder by a forward and backward action of the pendant. They are constructed with either Lever, Duplex, or Chronometer Escapements, and some are provided with compensation balances adjusted to act equally at extremes of temperature.


THE INDEPENDENT CENTRE SECONDS WATCH is peculiarly adapted for the use of the medical profession. By means of its two trains it carries, besides the ordinary hands denoting hours, minutes, and seconds, a long seconds hand which can be stopped without stopping the watch. It is made with a stem winder, and therefore requires no key.

THE SPLIT CENTRE SECONDS is not quite so complicated as the last named. It has two centre second hands revolving round the dial, the one directly over the other, as also, in another part of the dial, a small hand revolving five times in a second. Upon pressing a stop-piece one of the long second hands is stopped, and another pressure will stop the other—the space between the two hands will then indicate precisely the time occupied by the event which it is desired to measure. Another push to the stop-piece will make both hands again fly together, and enable the operator it may be to make a new experiment or observation.

[95]

THE PERPETUAL CALENDAR KEYLESS WATCH, shows on its dial the year, the month of the year, the day of the month, the day of the week, the phases of the moon, as well as hours, minutes, and seconds. It requires no setting, as the old-fashioned Calendar Watch did at certain intervals, but, by a very ingenious contrivance, the changes from month to month, as for example from February 28th to the 1st of March, or from 30th or 31st of other months to the 1st of the next, are all performed by the watch, which also of itself marks the extra day for Leap Year. When to all the above are added, as is sometimes done, the Minute Repeating Work to repeat the hours, quarters, and minutes, it may be said that the power of complication can no farther go within the limits of


[96]

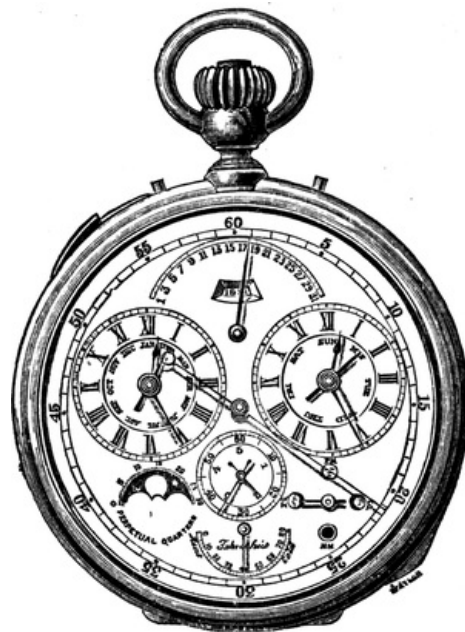

The Perpetual Calendar Keyless Watch.

the small box which is called a watch case,—for these watches are provided with either Lever, Duplex, or Chronometer Escapements as may be preferred, and with compensation balances adjusted to serve in extremes of temperature. But in the examples set forth in the following illustrations, it will be seen that superadded to all the foregoing are a thermometer, and an index showing the calendar by the old and new style, as indicated by the words Gregorian and Russian,—the former referring to Pope Gregory who decreed the alteration to the new style, and the latter to the fact that the Russians still reckon by the old style.

[97]

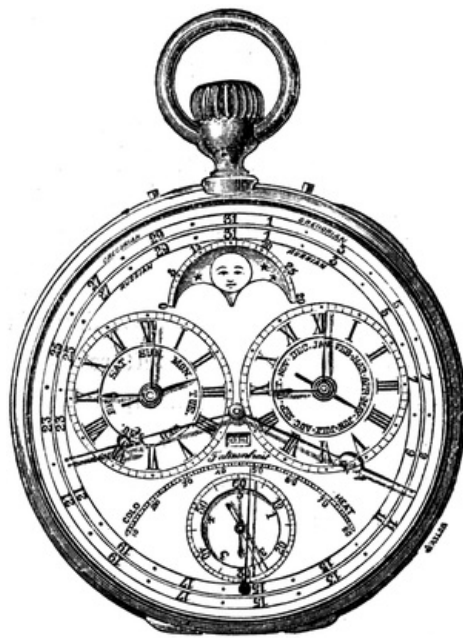


THE COMPLICATED PERPETUAL CALENDAR AND INDEPENDENT SECONDS KEYLESS WATCH, is another example of this kind of mechanism, which, without being re-set from time to time for leap year and other changes, keeps a perpetual register of seconds, minutes, hours, days, weeks, months, and years, shows Old and New Styles, the phases of the moon, and variations of heat and cold. It has also two separate trains of wheels and two mainsprings, both of which are wound up by the button at the pendant. It will be seen that the dial has two hour circles with hour and minute hands showing separate time. Below the centre is the sunk seconds dial with two seconds hands, the one over the other, and each working independently, so that the one may be stopped by a push at the button of the pendant and yet the other go on, to be in its turn stopped, so that the operator may use it as a stopwatch. Underneath the hour hands of each circle is the hand showing the month and the day of the week. The two centre hands, with the letters G and R, are pointing to the days of the month, and showing the Gregorian and Russian day. In the small square space just below the centre is the year, and below this and lying over the second hands is another hand pointing to the degrees of temperature to which the watch is exposed; near the top of the dial is a small plate showing the phases of the moon,—the position indicated in this illustration is that of full moon.

[98]

The MERIDIAN WATCH shows the time of day in any number of places in any part of the world. It is set to Greenwich time, and marks the difference between this and the time of all the great metropolitan cities in both hemispheres,—as St Petersburg, Constantinople, New York.

The name CHRONOMETER,—derived from the

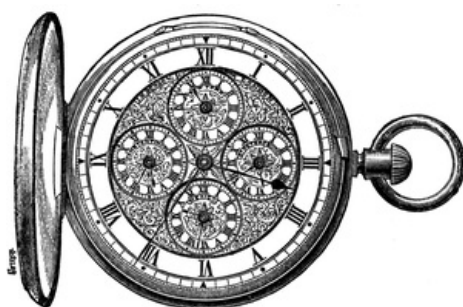

The Meridian Watch.

[99]

Greek, and meaning a time-measurer,—is chiefly applied to marine time-pieces and to watches which have been carefully made with chronometer or detached escapements and compensating balances serving to equalize the effects of heat and cold. MARINE CHRONOMETERS are the chief instruments for discovering the longitude at sea, and are therefore subjected to special tests at Greenwich observatory and elsewhere before being sent on board ship. They have dials of three or four inches in diameter, hour, minute, and second hands, besides a hand to indicate the day upon

which the instrument was last wound up,—and they are made to go from two to eight days. Being well mounted on gimbals inside of an air and water-tight brass case they do not toss about with the motion of the ship but always preserve their equilibrium. For extra protection they are generally kept enclosed in a mahogany case. Chronometers have for their motive power, like watches and spring-clocks, a mainspring acting on the fusee by the chain,—as the chain winds upon the fusee the force of the spring is so equalized that it is exactly the same whatever the position of the chain. When marine chronometers are sent to the Greenwich observatory they are subjected, under the directions of the Astronomer Royal, to extreme degrees of heat and cold, and up to the year 1835 prizes were awarded to those makers whose instruments best stood these tests; but such prizes are no longer given. It has even been found that chronometers which are most capable of withstanding extremes of temperature are not the most perfect in medium climates, and this discovery brought about new endeavours and a new suggestion known as the Auxiliary or Secondary Compensation.

[100]

MARINE TIME-PIECES FOR SHIPS AND YACHTS. These instruments possess the character rather of clocks than of chronometers, inasmuch as they are designed to hang against a bulk-head, and they would not appear unsuitable to house purposes. They are portable and useful clocks, and having a lever escapement with compensated balance, the motion of the vessel does not affect them. Some yacht time-pieces are constructed so as to chime the quarters or tunes, and to strike the ships' bells as well as the hours. They are also sometimes placed in very handsome cases of bronze or ormolu, decorated with special designs to illustrate the name of the ship or yacht to which they belong. Their movements are not as accurately adjusted as those of Marine Chronometers, but they, nevertheless, are made to keep time excellently.

[101]

KEYLESS WATCHES.

[102]

The keyless mechanism to a watch is one of the great modern improvements in watch work; it does away with the old-fashioned key, with which so many persons have ruined their watches, the watch is wound by turning a knurled knob, placed on the handle or bow (see illustrations, pp. 96-7) instead of by the ordinary means: the hands are set in the same way, with the addition of pressing a small projection on the side of the case. The advantages of these improvements are obvious; the case, which never need be opened in winding, is made air tight and dust tight, thus preserving much longer the fluidity of the oil, and greatly prolonging the intervals between the necessary cleaning of the watch. Besides which, the keyless mechanism being attached to the watch, the key can never be lost or mislaid, or worn out.

Strict attention to the following simple Directions is necessary for the proper Management of a Watch.

1st.—Wind your watch as nearly as possible at the same time every day the morning is the best. Care should be taken to avoid sudden jerks.

2nd.—Be careful that your key is in good condition, free from dust and cracks. It should not be kept in the waistcoat pocket, or in any place where it is liable to rust or get filled with dust.

3rd.—Keep the watch while being *wound* steadily in the hand, so as to avoid all circular motion.

4th.—The watch, when hung up, must have support, and be perfectly at rest; or, when laid horizontally, let it be placed on a soft substance for more general support, otherwise the action of the balance will generate a pendulous motion of the watch, and cause much variation in time.

5th.—The hands of a duplex or chronometer watch should never be set backwards; in other watches this is a matter of no consequence, but to avoid accidents it is much better to set them always forward.

6th.—Should the watch vary by heat or cold, as when worn or not worn in the pocket, the hands may be set to time, but the regulator should not be altered; but when it is found necessary to alter the regulator, it should be done gently, and very little at a time.

7th.—*The glass should never be opened in watches that are set and regulated at the back.*

[103]

8th.—Keep your watch-pocket free from dust or nap, which generally accumulates in the pocket when much used.

9th.—Be cautious to whom you give your watch for repair; the best watches being frequently irretrievably damaged by inexperienced workmen. Never allow your watch to go longer than two years without being cleaned.

HOUSE CLOCKS.

[104]

Between the small wooden Dutch Clock of the value of but a few shillings, and the carefully-made Regulator Clock which costs ten times as many pounds, there is necessarily a wide difference; but both may be considered as within the general designation, 'House Clocks.' The former sometimes go for many years with a fair amount of regularity, and are found to be useful to the humblest classes, whose hours for early morning labour are frequently regulated thereby. The latter are made with such accuracy as to correct the time of other clocks, such as turret and church clocks, which are more exposed to the influence of the weather, and are necessarily made upon a coarser scale. In large mansions there is no handsomer or more necessary appointment for the hall or vestibule than a fine eight-day clock, 'to welcome the coming, speed the parting guest,' and to give the time of day to the entire household.

It would be worth while, did our purpose admit of it, to write a chapter on the longevity of Clocks, by way of showing the comparative cheapness of the solid, well-built piece of mechanism whose every item has been carefully put together of the very best and most durable materials by the most skilled horologists. For generation after generation such a sound, well-made time-piece shall keep accurate time, and put to shame by both its performance and the insignificant expense of keeping it in order, the instruments of, it may be, more showy appearance, but less careful construction. Such a clock descends from father to son until its own age is scarcely to be remembered, and is regarded as one of the family heir-looms,—nay, as more,—almost, we would say, as a friend familiar with all the scenes and experiences which have made up family history. It was of such a clock that Longfellow wrote—

[105]

'By day its voice is low and light,
But in the silent dead of night,
Distinct as a passing footstep's fall,
It echoes along the vacant hall,
Along the ceiling, along the floor,
And seems to say, at each chamber-door,
For ever—ever,
Never, for ever.'

It was such an one that Dickens apostrophized in that wonderfully-genial style which won for him so much love and fame:—'My old cheerful, companionable clock. How can I ever convey to others an idea of the comfort and consolation that this old clock has been for years to me!... What other thing that has not life could cheer me as it does! what other thing that has not life (I will not say how few things that have) has proved the same patient, true, untiring friend! How often have I sat in the long winter evenings feeling society in its cricket voice! how often in the summer twilight, when my thoughts have wandered back to a melancholy past, have its regular whisperings recalled them to the calm and peaceful present! how often, in the dead tranquillity of night, has its bell broken the oppressive silence, and seemed to give me assurance that the old clock was still on guard at my chamber-door!'


[106]

The Hall clock is often a plain, simple, undecorated instrument, where all others are perhaps somewhat ornamented. Bracket clocks for the staircase or landings, Mantelpiece clocks for the drawing and dining rooms, for the study, the boudoir, and the best bed rooms, have each their separate shape and character specially designed, and are to be found in simple black-stained wood or real ebony, in marble of different colours, in bronze, in buhl, and in ormolu, with or without enamel ornaments, and with or without miniature figures at base, sides, and top. Until lately most of our ornamental mantelpiece clocks were imported from the continent, although French workmanship is generally inferior to our own, but preference was shown by the public to the former on account of the greater attention given by the French to external decorations and variety of pattern. I am endeavouring to provide that for the future this branch of clockmaking shall not be abandoned entirely to our continental neighbours, whose exports of this kind to our country yearly are very considerable. Henceforth by means of new designs specially made for me and by me, and of a sufficiently skilled staff of artistic workmen, selected for the purpose of working under my superintendence, on my own premises, I shall be able to compete on equal, nay, as to mechanism, on superior, terms with the best specimens of decorated clocks from foreign *ateliers*. There is no reason why the admitted superiority of English mechanism should not be coupled with the best designs for decorated clock-cases; there is every reason why handsome clocks should be made which will keep time well, and add not only by their beauty but their usefulness to the enjoyment of domestic life. If the proverb, 'handsome is that handsome does,' applies to clocks, English workmanship should soon obtain pre-eminence, for it is well known that the principle upon which French clocks are generally made renders them less durable time-pieces.

[107]

The most ancient clocks differed in many respects from those now in use. Clocks of the earlier period had, as we have said, instead of the pendulum now in use, a *balance*, vibrating on the top of the clock, as the regulating medium. The escapement was of the verge construction, a sketch of which will be seen below, which represents a clock of a most ancient character.

[108]

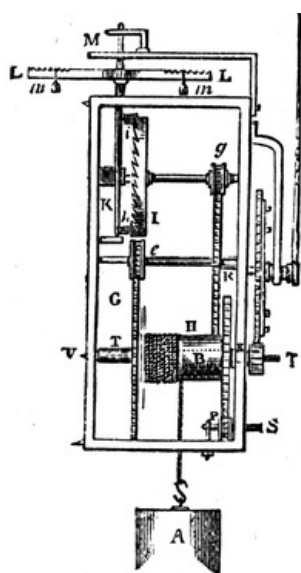

Old Balance-Clock.


Without entering into any very minute detail of the manner in which motion in a clock is successively communicated from one toothed wheel (G or R) or pinion (*e* or *g*) to another, which, indeed, would only tend to perplex the mind of the general reader, it will be sufficient to state the following. S is a square piece of steel fixed to and forming part of the pinion P. In winding the clock the key is placed upon this square, and being turned round continuously in one direction, the pinion P turns with it. This communicates its motion to the wheel R, which is fixed to the cylinder B, and which in its revolution coils or winds up the cord to which is attached the weight A. While this takes place the wheel G is held in check by another wheel, called the 'ratchet,' and a click (neither of which is seen in the sketch), but when the operation of the winding is completed, and the weight A begins to descend, the cylinder B, together with the wheel G, turn on their common pivots V, V, and the motion is thus communicated from wheel to pinion until it reaches the escapement-wheel I. The teeth of this wheel, in its revolution, act alternately on the pallets *i*, *h*, which project from and form part of the spindle or verge K, M, and thus produce a vibratory or backward and forward motion of the balance L, L.

[109]

Were it not for this detention, the duration of which is much increased by the swing of the balance, the weight A would descend with gradually accelerated speed, till, in a few moments, the cord would be entirely unwound from the cylinder, and the clock be at rest.

The **SPRING CLOCK** as ordinarily made is thus constructed.

The frame consists of two oblong plates of brass pinned together by short pillars, and pierced with holes, in which run the arbors of the various wheels. Next, the mainspring, the moving or motive power of the clock, which is a riband of steel, highly tempered, and enclosed in a cylinder or barrel. In the middle of this barrel is the spring or barrel arbor, to which the spring is hooked at



Clock Spring.

one end, the other end being fixed to the circumference of the barrel. Outside the frame or plate, and at the end of the arbor, is the ratchet, a wheel with saw-like teeth. This is acted upon by a click, which, falling into the ratchet teeth, prevents the recoil of the mainspring, so that the spring has no means of uncoiling itself, except by the moving of the train of wheels. This click is screwed to the outside of the oblong plate. The power of the mainspring is transmitted to the train of wheels by means of a chain or gut, one end of which is fastened to the outer edge of the barrel, and the other end to the fusee, which is of conical shape, securely fastened to the arbor or axis of the main wheel; on this same arbor is the square, on which the key is put for winding. When this square is turned in winding, the fusee draws the chain or gut from off the outer edge of the barrel, and coils up the spring within it. The spring when fully wound, and consequently at its greatest power, acts by means of the chain or gut on the small end of the fusee, which in turning drives the train of wheels. As the spring becomes gradually uncoiled, and the power exerted less, the leverage is increased in the same proportion by the increased width of the fusee on which it acts.

[110]

To prevent the straining of the spring, a little contrivance called the stop-work is introduced. It consists of a piece of steel somewhat in the shape of a bayonet, which is so fixed and contrived that the last turn of the gut or chain on the fusee forces the stop into contact with a projection on the end of the fusee, which abutting against it, forms the check felt when the clock is wound up. On the same arbor with the fusee is fixed the main wheel, which with the before-described contrivance of click and ratchet, permits the turning of the fusee or winding-up of the clock, while it itself remains stationary. This wheel acts in the centre pinion (a pinion is a little wheel playing in the teeth of a larger wheel, and has six, eight, ten, or twelve teeth, or, as they are called, leaves), which is fixed to the centre arbor, and carries the minute hand. This pinion is so constructed in relation to the other parts of the clock as to make one revolution in an hour; the centre wheel being firmly riveted on the pinion, it must also revolve once an hour. The centre wheel acts into another pinion, which is called the third wheel pinion, upon the arbor or axle of which is securely fixed the third wheel, which again acts in the escape-pinion carrying the escapement-wheel. On the top of the back plate is firmly screwed the back cock, or the support of the pendulum, which is suspended from it by a flexible spring, as before described. This pendulum receives impulsion from the wheel-work by means of the crutch, a small part attached to the arbor of the pallets, and which projects downwards about three inches, parallel with the pendulum rod. To the lower part of the crutch is screwed or riveted at a right angle a piece of steel, in such a direction as to penetrate the pendulum rod, which has a slot or hole cut to receive it; impulsion is thus given to the pendulum. Between the frame and dial-plate is the motion work, consisting of three wheels; the first, called the minute wheel, is attached to the arbor of the centre wheel, which, it will be recollected, makes one revolution an hour, and acts in a wheel of the same size, whose axle carries a pinion serving to drive the hour wheel. This hour wheel is supported by a bridge screwed over the minute wheel. The dial is pinned on to the front plate; the hour hand is fixed on a socket communicating with the hour wheel, and the minute hand on the arbor of the centre wheel.

[111]


[112]

When a clock is intended to strike, a separate train of wheels has to be introduced into it,—one train of wheels serving to keep the time, and another train for the striking part. It may be as well to add that a greater amount of labour is required to make the striking than the going part of a clock.

There are only two kinds of striking parts now in use, and these are characterized

by the terms 'Rack' striking work, and 'Count-wheel,' or 'Locking-plate,' striking work. The Rack striking work (see next page) is the best and safest ever introduced, because with it the clock may be made to strike any number of times within the hour. A, the minute wheel

[113]

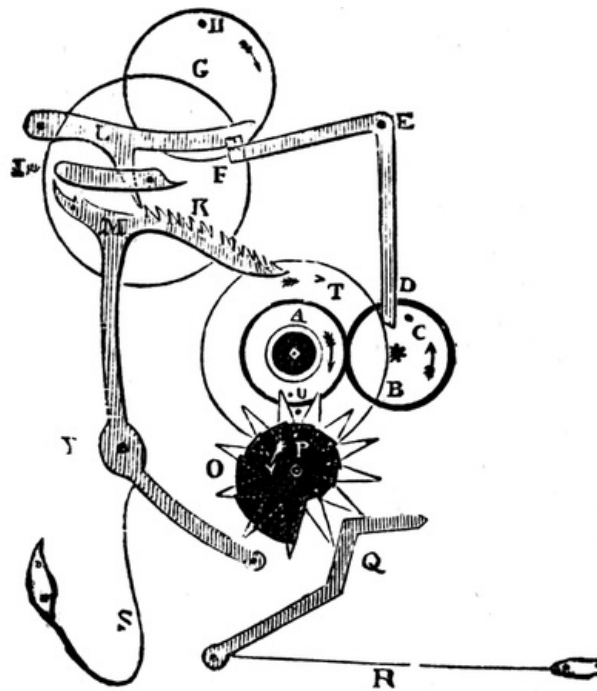

Rack Striking Work.

revolving in the direction of the arrow, and driving the wheel B, which is of the same size, and has the same number of teeth. C, a pin fixed in the wheel B, and acting on the lever D, which has its centre of motion in the point E. L, the click, the lower point of which acts in the teeth K of the rack M. S, the rack-spring, which acts upon the lower end of the rack, or, as it is called, the rack-tail, and brings it in contact with the snail P. Q and R are the jumper and its spring, by which the snail P, fastened to the star-wheel O, is kept in its place. Y, the centre of motion of the rack, on which it acts freely. In the wheel A is fixed a pin U, which, as the wheel A rotates, gradually forces before it a tooth of the star-wheel O, which carries with it the snail P, until at last the second step of the snail is opposite the rack-tail. While this is going on, the wheel B, driven by the wheel A, is advancing in the opposite direction, and, by means of the pin C, is pushing before it the end of the lever D. It is obvious that the other end, F, of the lever will be gradually raised, and this will lift the lower point of the click L out of the teeth of the rack. The latter being now free will yield to the action of the spring S, which will force its lower end into contact with the second step of the snail, and throw back the head of the rack to a corresponding extent. By this action the striking train of wheels is released, and the two wheels, G and I, seen in the upper part of our cut, begin to rotate, but are stopped by H, a pin that is caught by a stud which projects from the end F of the lever. As the wheel B advances, the pin C gradually frees itself from the long arm of the lever D, which drops by its own weight into its original position, and frees the wheels G and I, which immediately commence once more to rotate. At the centre of the wheel I is fixed the gathering pallet, that, as it revolves with the wheel, gathers up one by one the teeth of the rack, which is prevented from falling back by the lower end of the click L, and thus gradually draws it forward until the last tooth is reached, when the end of the gathering pallet abuts on the end of the rack head, and the train of wheels is once more at rest. It is obvious that for every tooth of the rack which is gathered up, there is one revolution of the wheel I, and this communicates with the tail of the hammer, causing at each revolution a blow on the bell. There is, as will be at once seen, an important connection between the various parts. When the second step of the snail is presented to the rack-tail, the head of the rack is thrown back a distance corresponding to the width of two of its teeth. This requires two revolutions of the gathering pallet to return it to its place; and these two revolutions of the pallet and the wheel which carries it govern the two blows on the bell which signify the hour. At three o'clock


[114]

[115]

the third step of the snail will be presented to the hammer-tail, and so on.

On the next page is an illustration of the back part of a French Clock, as seen upon opening the door of the case. At the right hand side will be observed the count-wheel A, fitting tightly upon a prolonged square arbor of the second wheel in the train, and having twelve openings of unequal length around its outer edge, 1, 2, &c. Just above the wheel towards the right will also be seen the 'Dog,' or 'Detent,' F, which falls into these notches, and is a part of the locking similar to that which is represented at the stud and the pin H. So soon as the stud is lifted the pin becomes disengaged, the wheel-work revolves, and the count-wheel being firmly fixed to the prolonged arbor of one of those wheels, advances with it in the direction indicated by the arrow, the detent resting upon the plain part of the locking-wheel. When the required number of hours have struck, the notch approaches the detent, the gravity of which allows it to fall therein.

[116]

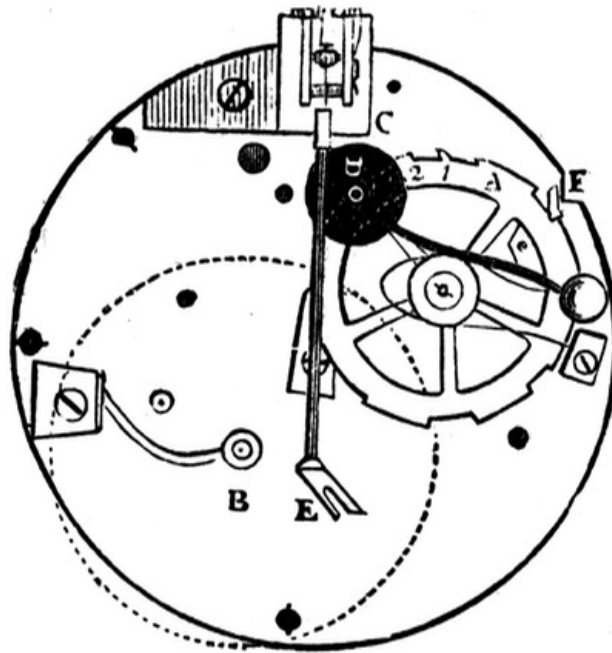

Back of French Clock.

In connection with this detent is also another projecting piece, which is carried inside the frame, and when it falls presents a broad surface to a pin fixed in the rim of one of the wheels. Thus the motion of the wheel-work is stayed until this piece is again lifted by the going parts from the pin, and held in that position by the outer rim of the locking-wheel A, until again the next notch is presented to the detent. When it falls, the stud is carried with it, against which the pin becomes engaged. The number of strokes depends on the distance which the count-wheel has to revolve before being stopped by the detent F. The chief objection to the locking-plate being used for striking, arises from the fact that, if ever the clock is allowed to run down, or if the clock gets otherwise stopped, it strikes wrong afterwards, until it has been properly re-set to the hour.

[117]

Clocks are made of all manner of shapes, patterns, and sizes, for all manner of places, positions, and persons.

BRACKET CLOCKS, which are intended to occupy but a small space, say on a staircase, or lobby, or landing, are sometimes made with extreme finish, care, and elegance, sometimes are simply plain and devoid of embellishment. They are constructed with or without striking work.


CHIME CLOCKS are a great addition to the attractions of a house. They are usually made to go eight or fifteen days; to strike the hours and quarters on four or eight bells or gongs.

MUSICAL CLOCKS are constructed so as to play several tunes at certain intervals with the greatest finish and perfection. The mechanism for time-keeping being easily disconnected from the musical mechanism, the latter may be stopped without any

interference with the clock as a time-keeper.

CARRIAGE CLOCKS are made so as to be unaffected by the motion of the vehicle. They are usually of a small and squarish shape, enclosed in leather, so as to protect the case from scratches; but they vary in size,—measuring usually from four to seven inches high by two-and-a-half to four inches in breadth and the same in depth. Some are made without striking movement, some to strike hours, half-hours, and quarters, some with repeating work, and some with an alarm added to them.

[118]

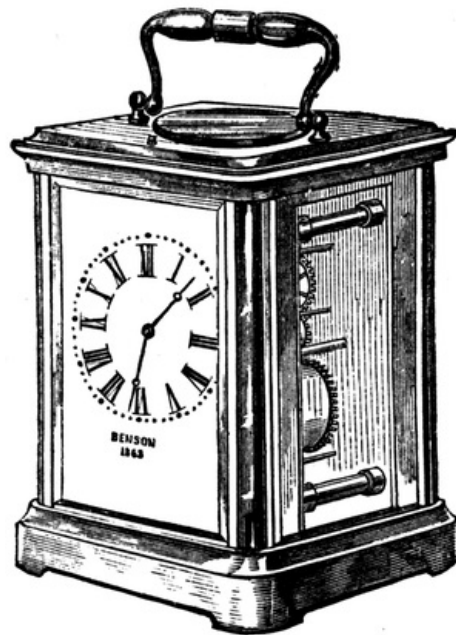

Carriage Clock.

LIBRARY and DINING-ROOM CLOCKS are frequently seen decorated with highly elegant ornaments, in bronze, marble, ormolu, and with miniature figures, as well as objects of still life, but these clocks are usually not so conspicuously ornamental as those which are designed for the drawing-room.


[119]

SKELTON CLOCKS are so named from their movements being all bare and uncovered. When watches were comparative novelties it was not at all an uncommon desire on the part of their possessors to watch the operations of a mechanism which was regarded as wonderfully resembling life itself. Watch cases were consequently made of crystal, and were found strong and serviceable. In skeleton clocks the escapement is sometimes made a peculiarly interesting feature to the non-professional eye delighting in noting the amazing accuracy with which each piece of the mechanism works and combines to produce the result required.

REGULATOR CLOCKS are, as we have said, the most perfect time-pieces which can be manufactured.


TELL-TALE CLOCKS are of great service in securing the attention and watchfulness of persons left in care of premises or property. They are made with a number of pins projecting round the edge of the dial, and coming into contact once every quarter of an hour with a pin fixed at the top part of the dial, over the part which in an ordinary clock is occupied by XII. The dial revolves completely once every twelve hours, and presents one of the projecting pins to the index every quarter of an hour; the watchman should then be ready at hand to pull a cord, by means of

[120]

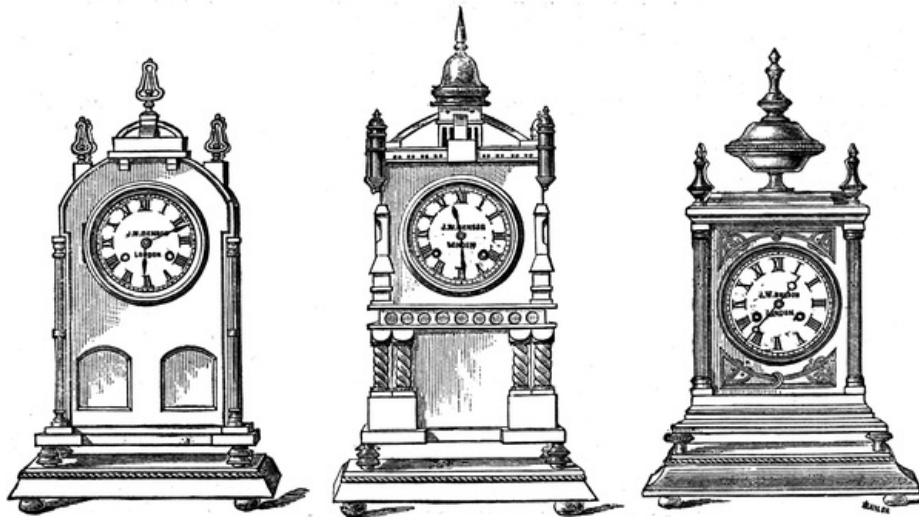


English Ormolu Clocks.

[121]

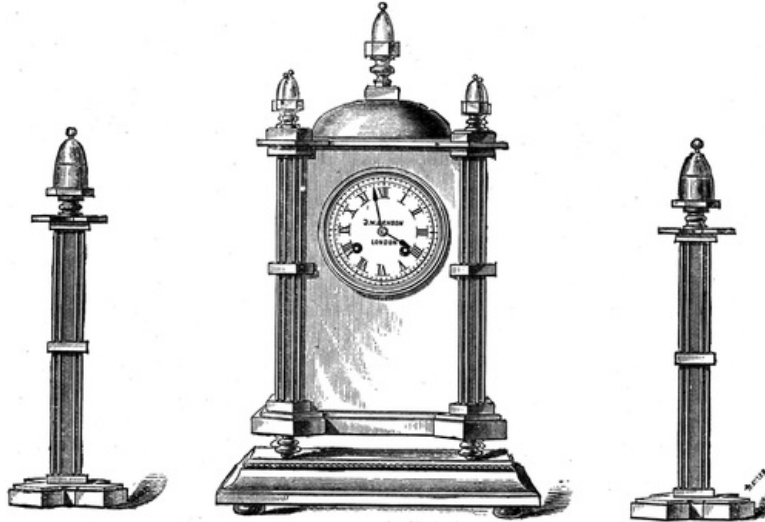

English Ormolu Clock, &c.


[122]

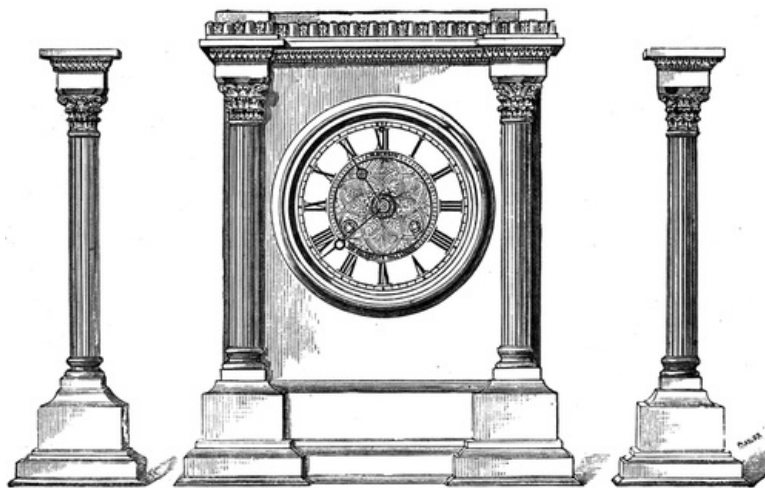

English Ormolu Clock, &c.

which the projecting pin is pushed in; otherwise the dial shows the exact time of his absence and neglect of duty.

[123]

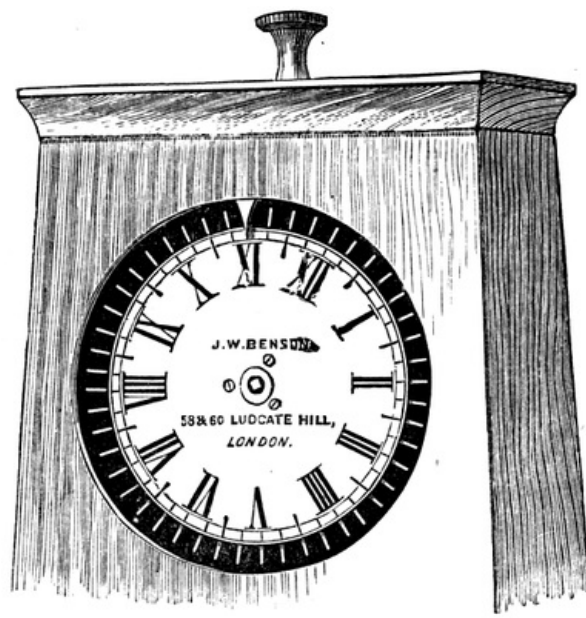

Tell-Tale Clock.

ELECTRICAL CLOCKS have been several times planned and made by different ingenious inventors, and obtained considerable notice, but they have not been hitherto as successful as was expected. Electricity has been applied to the direct movement of the pendulum itself, and subsequently to the raising a small weight to act upon the pendulum in the style of a gravity escapement. In perhaps the latest of these instruments, called a Magnetic Clock, an electromagnet was used to relieve the pendulum from the influence of the spring by which impulsion had been given, and to make the return or reflex vibration. Electric clocks are now seldom made; electric dials without any clock-movement in connection with them are made to show the standard time by means of a galvanic current sent from the Greenwich Observatory clock at intervals of a minute or half-minute it may be,—even as Electric Timeballs show to distant towns and out-ports, by means of such a current, the exact Greenwich time once a day.

[124]

The ELECTRO-CHRONOGRAPH is a new and useful invention for timing with great precision the quickest of events. It is applied to a central seconds clock with a dial three feet in circumference showing the hours, minutes, seconds and fifths of seconds. This clock erected in a prominent position, say on a raceground, and worked by electricity, enables the starter of a race to set the works in motion; by means of a tape held up at the winning post and connected with the batteries, the winner upon breasting the tape stops the hand of the clock.

The following simple directions will be found of great use in the management of a Clock:—

When the Clock is unpacked it should be carefully handled with a silk handkerchief or piece of tissue paper, to prevent the moisture of the hands soiling the case. Unscrew the bell and take it off, then put on the pendulum by passing it through the fork, and hang it upon the two small brass pins, *with the hook from you*. Screw on the bell with the convex part outwards, taking care that it does not touch the pendulum.

[125]

The stand or bracket should be both steady and level before the Clock is placed upon it; for, unless the Clock is quite in proper beat—that is, unless the beats or ticks occur at equal intervals, it cannot go regularly.

In order to set the Clock to the hour of the day, the minute-hand should be turned on carefully forward with the finger and thumb, the setter pausing as he reaches the XII. and the VI., to allow the Clock to strike each hour and half-hour.

If the striking should at any time be wrong, and it should strike the hour at the

half-hour, or the half-hour at the hour, the error can be rectified by moving the minute-hand on to 5 minutes before the hour, or half-hour, and then back until it strikes.

Or, if it should strike a wrong hour—*e.g.*, supposing the Clock should strike 3, and the hour-hand point at 7, then the hour-hand may be moved back to 3, and the Clock afterwards set to the hour of the day in the usual manner.

If, at any future time, the Clock should require regulating, the small steel square above the XII. is the regulator, and turning it a *little* to the right (half-turn of key) will make the Clock go faster, and to the left, slower. This should be repeated until the desired effect is obtained.

[126]

The bell-stud, or arm to which the bell is screwed, is purposely made of soft metal, so that it can be bent up or down so as to obtain a heavy or light blow of the hammer as may be desired.

Both squares in the dial should be wound once a week.

TURRET CLOCKS.

[127]

A Church tower without a clock and bells seems an unfurnished edifice, which must be fitted and filled before it can serve the purpose for which it was built;—like a form without life, a body without a soul. A good Church clock is useful to everybody; it is the friendly monitor alike of rich and poor,—the regulator of every private time-piece,—the standard of time for a whole parish or township. By it the artisan or mechanic trudges off to his daily labour; by it the tradesman opens and closes his shop; by it the schoolboy is admonished as 'with shining morning face he creeps like snail unwillingly to school;' by it the law itself regulates its penalties,—(enacting, as it does, house-breaking between nine at night and six in the morning to be the heavier crime of burglary;)—by it, in a word, are all the multifarious transactions of everyday life more or less regulated and measured, and when the church clock stops, it produces a social discomfort and anarchy throughout a whole neighbourhood, to an extent scarcely credible. A good public clock is a benefit to all,—a faulty one is a general nuisance and a continual source of irritation. A public clock is in its way as necessary as the public highway, the public market, the public law itself. It is the product and the symbol of advanced civilization, the one everwakeful watchman and trusty friend of all, by whose chimes the sleepless merchant has often planned his ventures or sighed o'er apprehended losses and dangers; the student busied with researches has consumed the midnight oil; the sick have counted their hours of pain, longing in the night for the dawn, in the daytime for the night. On the other hand, when one like Mr Justice Shallow is reminded of the mad days of his London youth, he very aptly associates them with the Bacchanalian memories which Falstaff appeals to,—'We have heard the chimes at midnight.'

[128]

To have lived 'where bells have knoll'd to church' was according to Shakspeare to have been blessed by humanizing influences comparable with those produced by having—

'Sat at good men's feasts, and wiped our eyes
Of drops that sacred pity has engendered.'

Cowper can find no better words to describe the utter desolation of the island where the shipwrecked Selkirk bemoaned his absolute solitude 'out of humanity's reach,' than by putting into his mouth the language—

[129]

'But the sound of a church-going bell
These valleys and rocks never heard,
Never sigh'd at the sound of a knell,
Nor smiled when a Sabbath appear'd.'

In our everyday experience we can each testify to the truthfulness of the poet who points to the close association which exists in most minds between the church clock

and the varying times and seasons, with their different joys and sorrows, and we can most of us say, with Southey,—

'I love the bell that calls the poor to pray,
Chiming from village church its cheerful sound,
When the sun smiles on labour's holy-day
And all the rustic train are gather'd round,
Each deftly dizen'd in his Sunday's best,
And pleased to hail the day of piety and rest.
And when, dim shadowing o'er the face of day,
The mantling mists of eventide rise slow,
As through the forest gloom I wend my way,
The minster curfew's sullen voice I know,
And pause, and love its solemn toll to hear,
As made by distance soft it dies upon the ear.'

It is but a short step from the sentimental consideration of such reminiscences to the practical inquiry how is the public time kept, and yet it is one which probably is seldom taken with a view to more or less thorough investigation. Without traversing the distance which divides us from that antique time when Archimedes measured the shadows of the Pyramids by his walking-stick, or when the 'dial of Ahaz' was constructed as one of the first of historical time-measurers, we can discover the principles upon which an instrument such as a thoroughly serviceable public clock of the present time, with all the newest improvements both in time-keeping and in wearing qualities, should be produced.

[130]

It is of some consequence, in the first place, to know that the introduction of steam-machinery has added to the accuracy of clockwork and at the same time considerably diminished its cost; fifty or sixty years ago there would have been charged as much as £800 for a turret clock inferior to that which may now be procured for £150; and the result is to be seen in the largely increased numbers of public time-pieces. It is obvious, however, that there is none the less need of care in the choice of a Clockmaker, for upon his skill and trustworthiness will depend whether the money be well spent or not, and whether the instrument furnished by him prove to be valuable and serviceable. It is not a purchase wherein the buyer can usually of himself judge of the merits of his bargain, he must rely upon the reputation established by previous works of the same kind. If the Clockmaker be not merely a clock-seller (as is too often the case, for Turret Clockmakers are but few), he will be able to point to similar instruments made and set up by himself in different towns and cities, in proof of his ability, but there will still be a necessity for explaining to the purchaser the chief points upon which the accuracy of such a time-keeper must depend.

[131]

In the first place, it is necessary to say that Turret Clocks are not merely house clocks upon an enlarged scale, differing from the latter merely in size and weight, but that the extra strength of the machinery requires greater weight of materials 'in a ratio as much higher as the cube is higher than the square of any of its dimensions,' and that increased weight means increase of friction. Besides this point which is peculiarly the province of the Turret Clockmaker, there are important questions to be considered by architects and their employers as to the proper method of constructing a Turret Clock chamber, so as to prevent too much atmospheric variation,—heat and cold, wind and damp, being each likely in some degree, as the seasons change, to affect the public time-keeper,—as witness the clock of St Paul's Cathedral, popularly believed to be an exemplary piece of mechanism, and yet often forced by the wind to vary its time so as to damage its own reputation among those who narrowly watch its behaviour under what may be called trying circumstances. It is not wise to build a tower without careful consideration for the tenant which is to occupy it, or having regard merely to architectural notions of external proportion, for usually it happens that when clock and bells occur as an afterthought, there is often some difficulty and extra expense in planning the room for them. Plenty of length and breadth to allow of the proper fall of the clock-weights and the swing of the pendulum save much in the cost of fixing, and are necessary to secure good time-keeping with the least trouble, for it is obvious that where numerous bevelled wheels with rod-work are employed for the purpose of moving the hands over the dial, if the

[132]

probabilities of unvarying accuracy are not lessened, the cost must be much increased. Works which have to be placed at some distance from the dials must be more powerful than if they could be put in their proper place, and a little forethought in the architect will save much money both in the original price of the machinery of a clock and in its subsequent repair. Then again, there is always the question for and against the illumination of dials to be considered, and of course with this is unavoidably mixed up not only the arrangements as regards space for the proper working of the time-keeping, striking, and lighting machinery, but the vexed question of ventilation above referred to,—some horologers asserting that chambers as nearly air tight as may be should be devised, and others that there ought to be a draught through the clock-room. There are in fact so many opinions more or less excellent, according to the circumstances of each case, that there is no laying down any arbitrary and unvarying rule, much must be left to the discretion of the Turret Clock manufacturer,—upon whom as has been already stated it is necessary also to rely for the essentials of a good clock, viz., the soundness of the materials, the quality of the workmanship, and the scientific accuracy with which the instrument has been planned and put together. Now before considering the present advanced state of the art of Turret Clockmaking and the various improvements which have to be carefully studied and applied by the makers who would bear the highest reputations as manufacturers, it will be necessary to bear in mind what has been said of the step-by-step progress in horological science of which we have already endeavoured to give the chief particulars. From 1288 A.D., the date of the oldest historical clock—that mentioned as having been set up near Westminster Hall by means of funds derived from a fine levied by the Lord Chief Justice of the period—till now when Big Ben reigns in its stead, is a long interval, with many wonderful incidents, and some great historical names. Henry de Wyck's Paris invention, Galileo's discovery of the pendulum, Huygens's practical application of that discovery, Dr Hooke's 'anchor' escapement, and Graham's dead-beat escapement, Harrison's 'gridiron' pendulum, and the latest applications of electricity and eccentricity, have each and all their peculiar attraction for horological students, but we need not recur to these branches of this highly interesting subject elsewhere treated of. We will proceed to mention a few memoranda about several old public clocks whose ingenious mechanism gained for them a well-deserved fame,—not, perhaps, so much for accuracy in time-keeping as for the grotesque devices with which old clockmakers amused their contemporaries? To them time, as such, was perhaps of not so much consequence as it is to us in these days of telegraph and steam communication. We moderns seem to think it a task sufficiently difficult to set up a sound public time-piece without connecting therewith the wonder-working machinery of a wax-work exhibition.


[133]

[134]

The CLOCK AT WELLS CATHEDRAL, made originally A.D. 1340, by a monk named Peter Lightfoot, is one of the best known of its class still in some sort of working order. The dial of this horologe is divided into 24 hours; it shows the motion of the sun and moon, and bears upon its summit eight armed knights on horseback, tilting with lance in rest at one another, by a double rotatory motion. This clock was removed from Glastonbury to Wells after the dissolution of the Glastonbury Monastery. In 1835 the works were so worn away that they were replaced by a new train, the curious old dial and equestrian knights being still retained.

ST DUNSTAN'S CLOCK [see p. 137]. This Clock, when old St Dunstan's Church in Fleet Street was

[135]

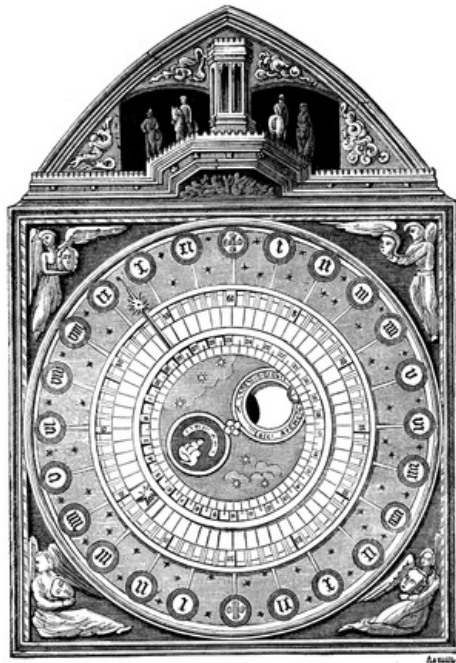

Wells Cathedral Clock.


pulled down, was sold by public auction, and bought by the late Marquis of Hertford, for whom Decimus Burton the architect erected St Dunstan's Villa in the Regent's Park. In the grounds of that villa this old clock with its automaton giants striking the hours and quarters was put up, and it is there still, to be seen in full working order, performing the same duties as of yore in Fleet Street.

[136]

ST JAMES'S PALACE CLOCK [see p. 138] is one of the most ancient public time-pieces now in use, but is intended soon to be removed it is said to South Kensington Museum. It has a locking-plate with ting-tang quarter, the quarter hammers being raised from the pin wheel while the striking hammer is lifted from the pins in the main wheel. It has a crown-wheel escapement with teeth on its edge, and the pallets working upright instead of over the top like a verge escapement. The hands are connected by the bevel wheels below the clock. The whole of the going train with the intermediate and bevel wheels are attached to the one bar so that the whole of the works have to be removed if one piece requires alteration or renewal. The pendulum rod is of iron.


ST PAUL'S CATHEDRAL CLOCK [see p. 140] is one of the best examples of old-fashioned clocks in London; it occupies the clock-room in the south-western tower. It may be described as a ting-tang quarter on the rack principle, having hammers raised from pins in

[137]

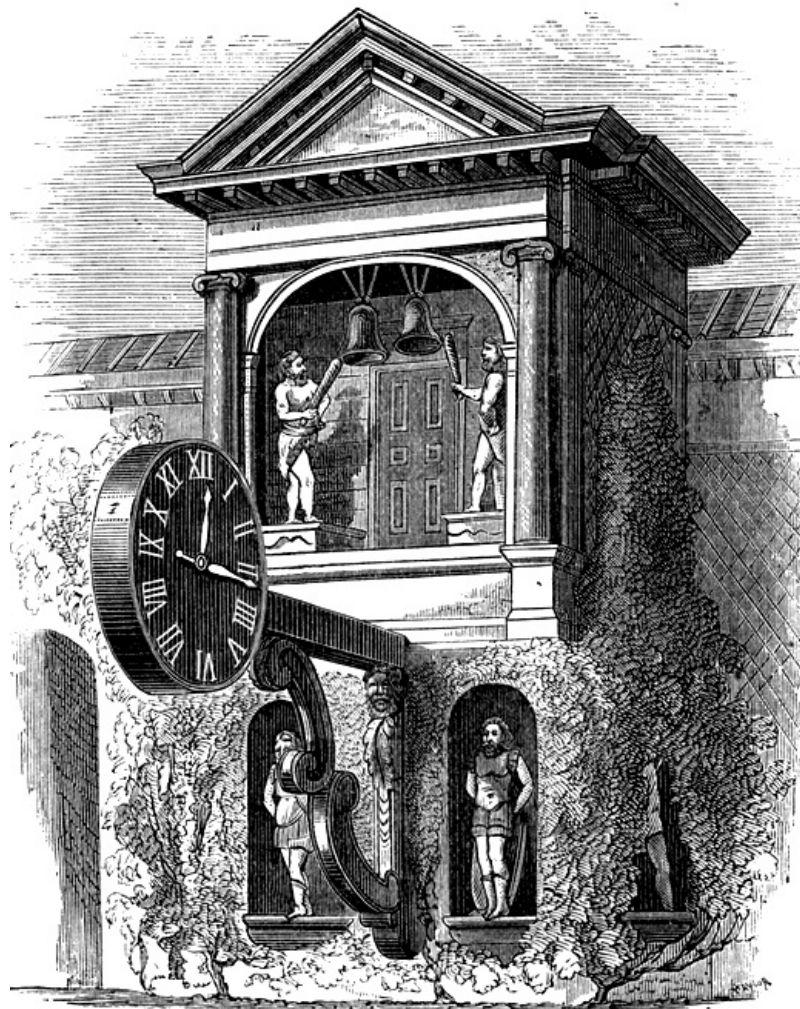

St Dunstan's Clock.

the main wheel as in St James's Palace Clock. The train is run in a bar, so that to get away one piece the rest must be disturbed. The escapement is a

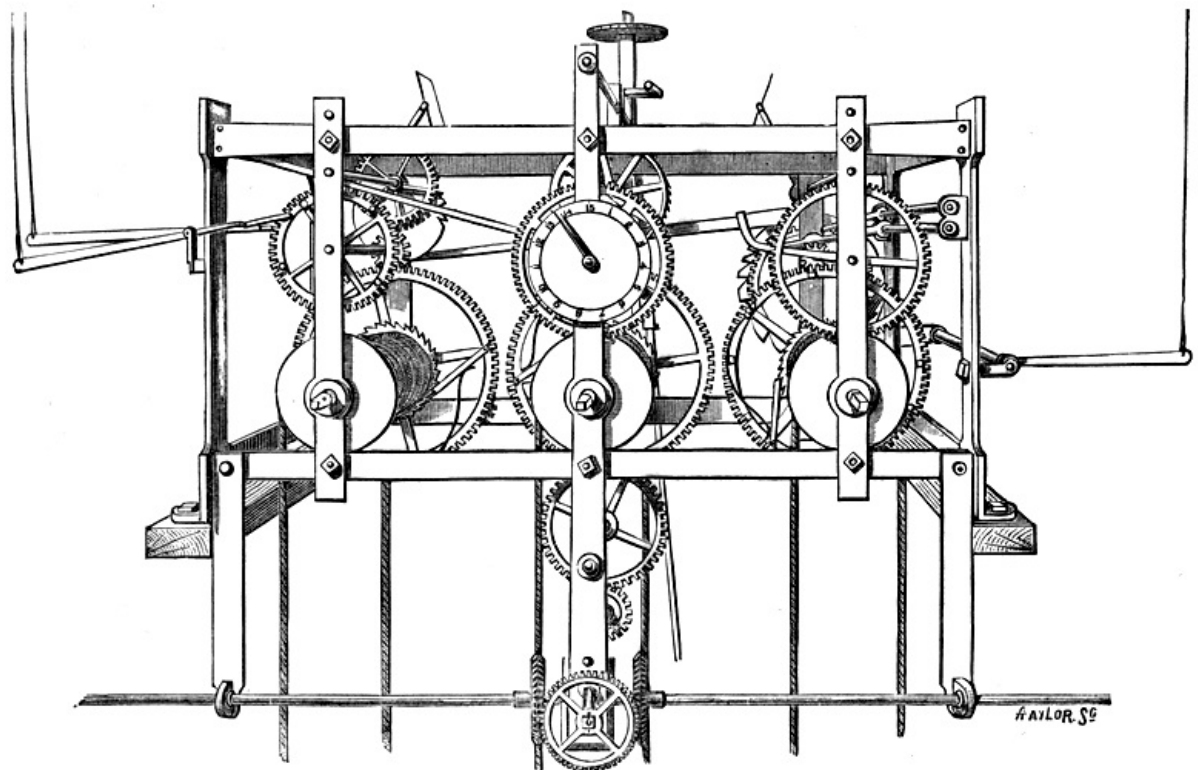

St James's Palace Clock.


recoil, beating two seconds with a wood rod pendulum. The length of the minute hand is eight feet, and its weight 75lb; the length of the hour hand is five feet five inches, and its weight 44lb. The diameter of the bell, made from old 'Great Tom of Westminster,' is about 10 feet, its weight 11,474lb; the hammer weighs 145lb, and the clapper 180lb.

The OLD CLOCK AT THE ROYAL FREE HOSPITAL, GRAY'S INN LANE, is a fair specimen of the work of 120 years ago. It has a recoil escapement, most of the wheels are of wrought-iron, cut by hand, as is also the pinion. The pendulum rod is of iron with leaden bob.

THE WHEELS.


And now, in order to form a judgment of what is necessary to be done to make a really sound and valuable Turret Clock of the present day, let me describe the materials of which it should be formed. One of the most important parts of a clock is the wheel-work. Iron wheels are of course very much cheaper than those which are made of gun metal or hard brass, but iron wheels, however well they may sometimes wear, are more liable to oxidize and to decay, and although it is certain that a large number of clocks are constructed with iron wheels by London houses of some reputation, a few years are generally sufficient to prove

[140]

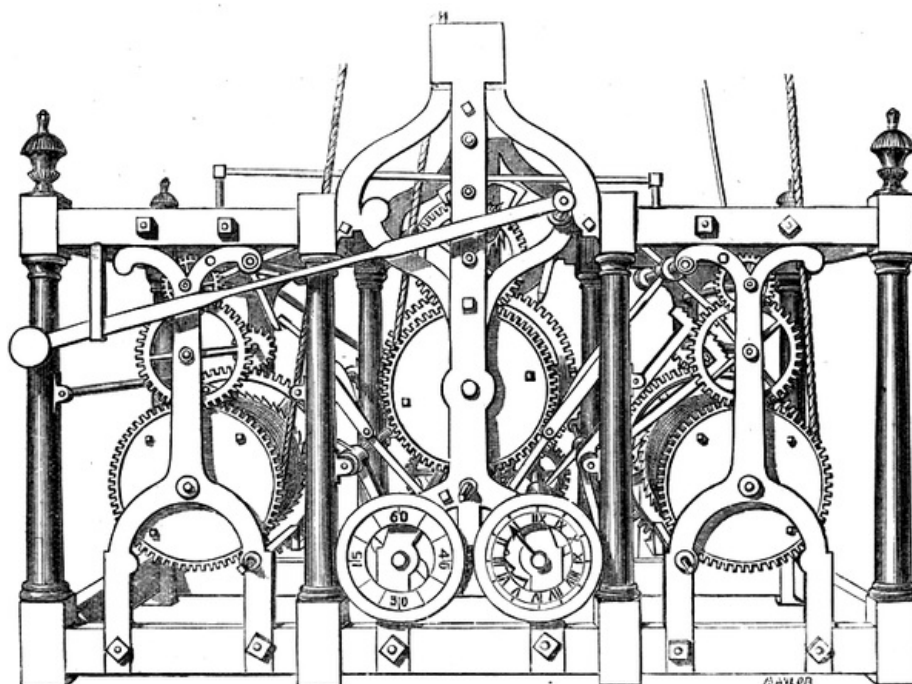

St Paul's Cathedral Clock.

[141]

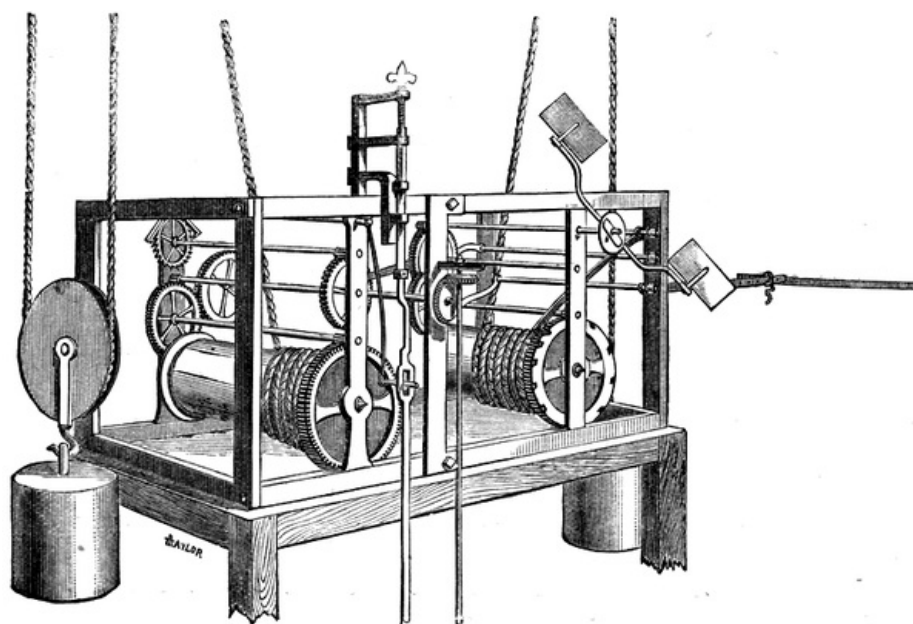

Old Clock at the Royal Free Hospital.

such time-pieces to be very faulty, and to necessitate the substitution of wheels of the superior metal.

[142]

The best clocks are usually made with wheels of the best gun metal. The teeth are cut by steam power, with an improved cutting engine; and at the same moment that the teeth are cut, they are finished by the engine without the aid of the file, sand-

paper, or other polishing materials, so that the most minute difference cannot possibly occur, their accuracy being secured even to the thousandth part of an inch. In the old times this work was done by a man turning a fly-wheel, but that method necessarily occasioned an unevenness of cut which had afterwards to be removed by filing and hand polishing. Wheels thus made could not of course have that precision of movement which is essential in a public clock, and which can only be obtained by a perfect mechanical fit of the teeth of the wheels, such true mechanical fitting being only secured by truly accurate cutting machines. Hand cutting varies with each artisan, and therefore cannot be equally trustworthy. In cheap clocks, constructed to suit public companies who give their contract to the lowest tender, iron is frequently used instead of steel, both in the pinions and arbors, and cast-iron takes the place of gun metal or hard brass in the wheels and bosses,—the result usually being that the Public Clock gets into disrepute through its requiring to be repaired so frequently, and more money is expended upon such repairs than would have sufficed for the purchase of a thoroughly perfect time-keeper. It is urged by the advocates of iron wheels that a clock can be manufactured at a considerably less cost by their employment, but in estimating expense there seems to have been overlooked the important question, as to what will be the probable durability of the machine.

[143]

I should be sorry to condemn wholesale all clocks, the main wheels of which are made of iron, but very certain it is that a large proportion of clocks constructed of this material and by London houses of great reputation (despite of their possessing an escapement invented by amateurs who consider themselves the depositories of all horological knowledge), have been found most faulty time-keepers, and after a few years have become entirely worn out and useless.

It is argued (and rightly so) by the advocates of iron wheels that case-hardened pinions should not be used, in consequence of their wearing with great unevenness, but such persons should be reminded that this objection is much greater in the instance of cast-iron wheels. A case came under my notice some time since of a clock made by a London house, with iron wheels, which after comparatively little time became entirely worn out and had to be removed, a result not at all surprising to those who are aware of the porous nature of iron. The TEETH OF WHEELS have to be made with the greatest skill and care in order that the entire mechanism shall work without friction, and shall not only temporarily keep time with regularity, but shall last for many years without renewal. Teeth should fit into one another without a squeezing pressure (which is equivalent to friction), but with exact uniformity of contact, the action being almost entirely between the teeth separating from each other and not between those which are approaching, i.e. in technical language, the action should be after the line of centres of the wheels and not before it.

[144]

Church clocks were accustomed formerly to be made to go for thirty-four hours, and to be wound up every day; by the frequency of which winding the clock could be made to keep time with great accuracy, for regulating could be attended to as frequently, and no great variation could well occur in twenty-four hours. But the regulating, as a matter of course, requires a regulator, or standard, of time, which is not always to be found in country places, nor even is the man in charge of clock-winding always in possession of a watch sufficiently accurate to convey the time from the regulator if there were one to the Church clock. Of late, Church clocks are made to go eight days, and so the labour of frequent winding has been saved, while at the same time by extra care in the manufacture and fixing of a clock, there need be no necessity for frequently regulating it.

[145]

PENDULUMS.

Whether the credit of practically applying the mathematical theory and properties of the pendulum was or was not due to Huygens the Dutchman, we have seen that Harris, a London clockmaker, put up the first pendulum clock in St Paul's Church, Covent Garden, in 1621. The great advance upon this discovery was that the pendulum bob must move not in a circle but a cycloid; and that back and front should be alike both in weight and shape to secure regular vibration. Cylindrical bobs are

now in general use for large clocks. The old iron rod pendulums were soon discovered to be affected considerably by variations of heat and cold,—the difference between winter and summer being ascertained to amount to the loss of a minute a week. Harrison's gridiron pendulum was one of the chief endeavours to prevent such variation, followed after a long interval by other ingenious inventions, which gained temporary approval and gradually fell into disuse. Room should be provided by the architect of every clock-tower in the chamber below that containing the movement, to allow of the swing of a 15-foot pendulum.

[146]


FALL OF THE WEIGHTS.

We have seen that the position in which a clock is placed in regard to the dial or dials whose hands it is to drive is a matter requiring some attention. Properly the floor of the clock-chamber should be so planned that the clock might stand immediately behind, and level with the dials; for there is extra expense and inconvenience connected with any more distant situation of the works,—the fall of the weights being sometimes difficult in such case to be provided for. The weights should hang, wherever it is possible so to arrange, immediately from the barrel to which they are affixed, without the intervention of pulleys of any kind, and much expense may be saved by providing for the descent of the weights to a considerable depth below the clock-chamber. As an instance however of the extent to which such difficulties can be overcome, I may mention that the hands of my great clock at the International Exhibition were situated nearly 400 feet from the clockworks, while the weights were carried by iron wire ropes over pulleys below the floor to a distance of 200 feet from the movement, then over another pulley fixed at a height of 80 feet from the ground.

The ESCAPEMENT is perhaps the most important part of a clock.

[147]

CROWN-WHEEL ESCAPEMENT.

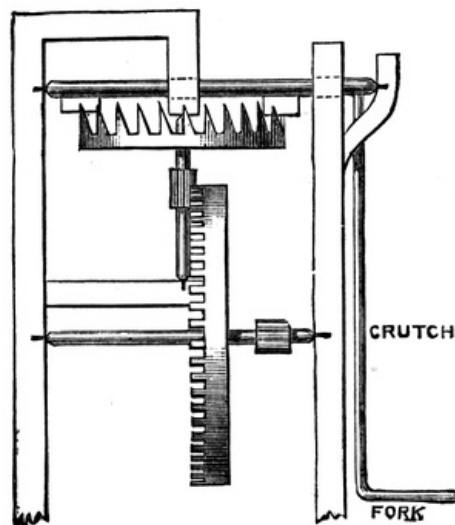


This is the earliest known escapement, and is to be found, as we have said, in Henry de Wyck's clock, all the difference between his escapement and the above being that one of the weights in de Wyck's balance is now set in a vertical instead of a horizontal plane. The bent end or fork seen in the illustration connects the pendulum with that arm technically called the crutch.

THE ANCHOR ESCAPEMENT.

[148]

After the crown-wheel escapement, the anchor escapement, invented by Dr Hooke or one of his contemporaries, came into general use, and remains so still; but it is not generally applied to those clocks which are required to go with the nicest accuracy.

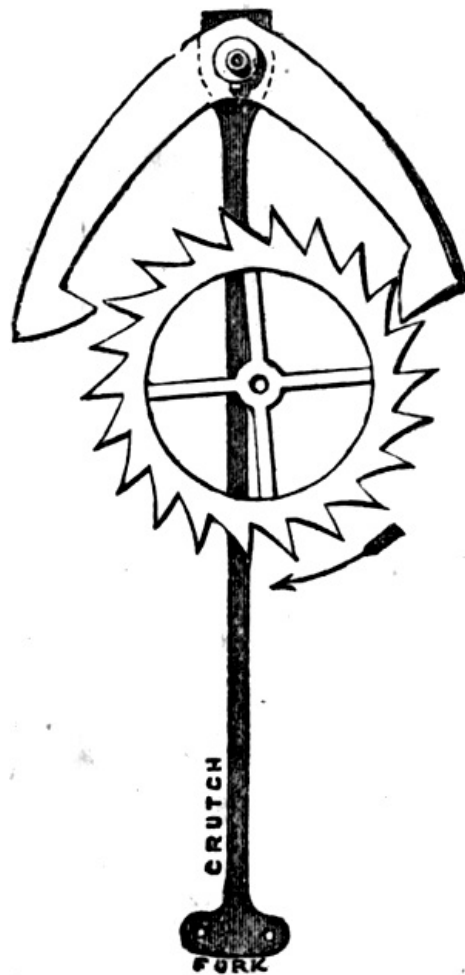


In the next illustration the tooth is seen escaping from the left pallet at the moment of the right pallet's infringing upon the opposite tooth, the pendulum is therefore to be seen still rising a little to the left, and will thus cause the wheel to recoil a little; upon its return the pallet and pendulum are again urged to the right, and so the impulse is continued which is necessary to maintain the motion.

[149]


THE DEAD-BEAT ESCAPEMENT.

invented by Graham is the one in most general use for the best clocks made by London makers of the highest repute.

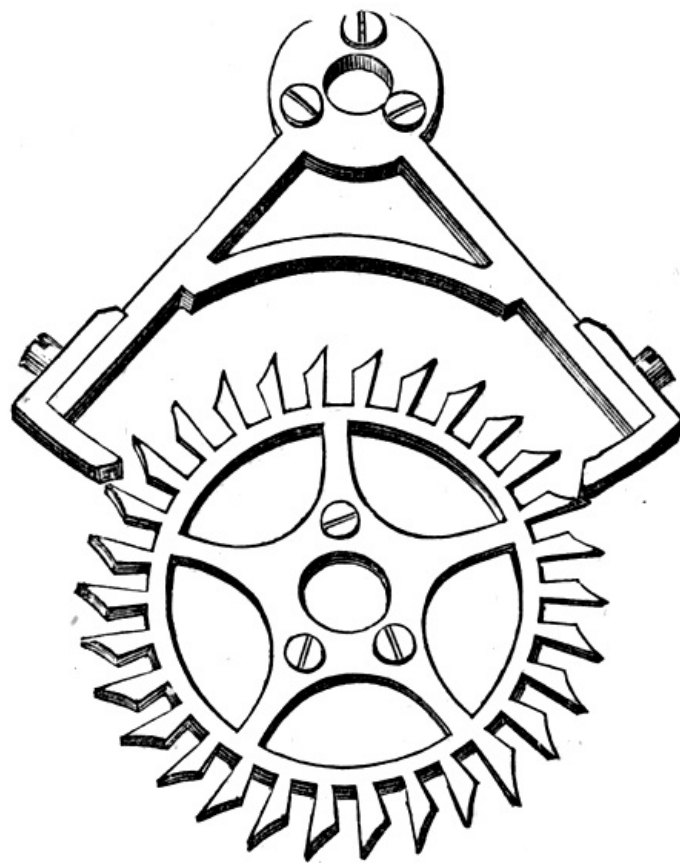


FRENCH SINGLE-PIN ESCAPEMENT.

This is a simple and ingenious escapement (see next page), which after being used for some time in both France and England went out of use, when, but recently, it was re-invented by a London watch-maker. The teeth are pins of steel set in the face of the wheel, and the upper half of each cylinder cut off as well as a small portion of the under or acting side. This escapement has one great advantage—that if a pin becomes worn or injured it is easily replaced, whereas in a wheel, if one tooth is damaged the wheel itself is worthless.

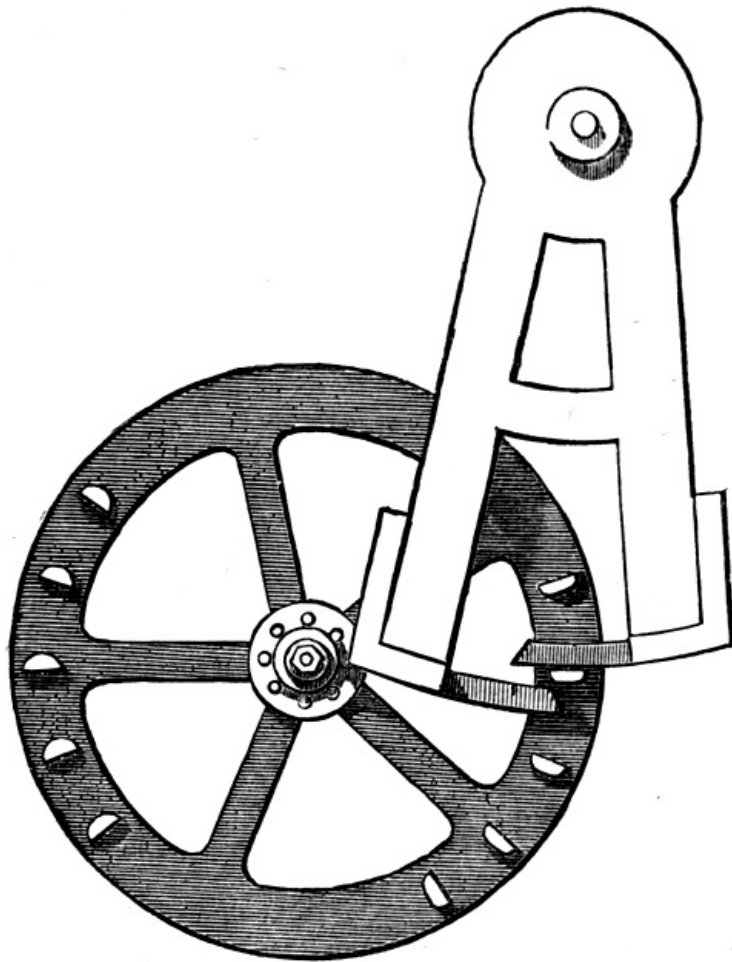

French Single-Pin Escapement.

THREE-LEGG'D GRAVITY ESCAPEMENT.

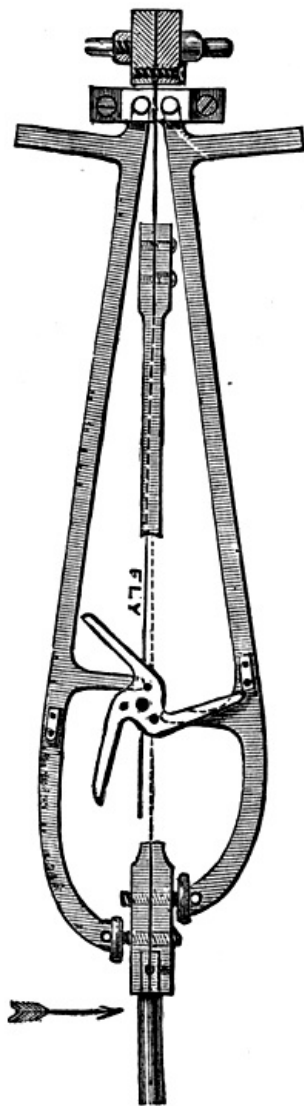

The above illustration represents a regulator escapement as it would appear in a front view; the pallets are lifted by the three central pins. The locking teeth vary in size from one to nearly two inches. The horizontal pieces projecting from the top of the pallets form the adjustment for the arc of the pendulum.

[152]

The great advantages possessed by this escapement over all other gravity escapements, &c., are as follows:—


1. It requires no oil.
2. The angle of the detent planes reduces the friction to almost nil.
3. As the impulse and the unlocking are in one direction, the escapement is unlocked without recoil of impulse arms.
4. No impending force to the pendulum from inertia of impulse arms.
5. The hold in the stops can be increased or diminished to any practical extent by reason of the inverted impulse arms.
6. Less affected by any disturbing forces of the train in proportion to the pressure on the stops.
7. Will bear more weight and give more power to the train without increasing the arc of oscillation.
8. No possibility of tripping under any increase of motive power.
9. The minimum arc of vibration to unlock is 8-tenths of a degree. Other escapements of similar construction require from 4° to 7°.
10. Take less weight for the motive power in proportion to the difference of pressure and draught on the lockings.

[153]

11. Unlocks by gravitation instead of by the pendulum and at the time of impulse.
12. Requires no fly nor remontoir, and thus reduces the weight of the motive power by one half.
13. The impulse giving motion to the pendulum increases as the force of gravity on the pendulum decreases. A great advantage over those escapements in which the unlocking is done by the pendulum when its momentum is nearly expended and at the extremity of its arc of vibration.
14. The angle of the detent planes can be set so as not only to offer no resistance to the unlocking, but to give an actual impulse in the same manner as the impulse pallets of a dead escapement. This completely frees the impulse which gives motion to the pendulum from any retarding influence of the train.
15. The arc of vibration is more equal in this than in any other gravity escapement.
16. It is not so liable to stop in consequence of a diminution of arc from the variation of motive force in train.
17. It will answer for regulators as well as for turret clocks, its arc of vibration being from 1° to 3° .

DOUBLE THREE-LEGG'D ESCAPEMENT.

[154]

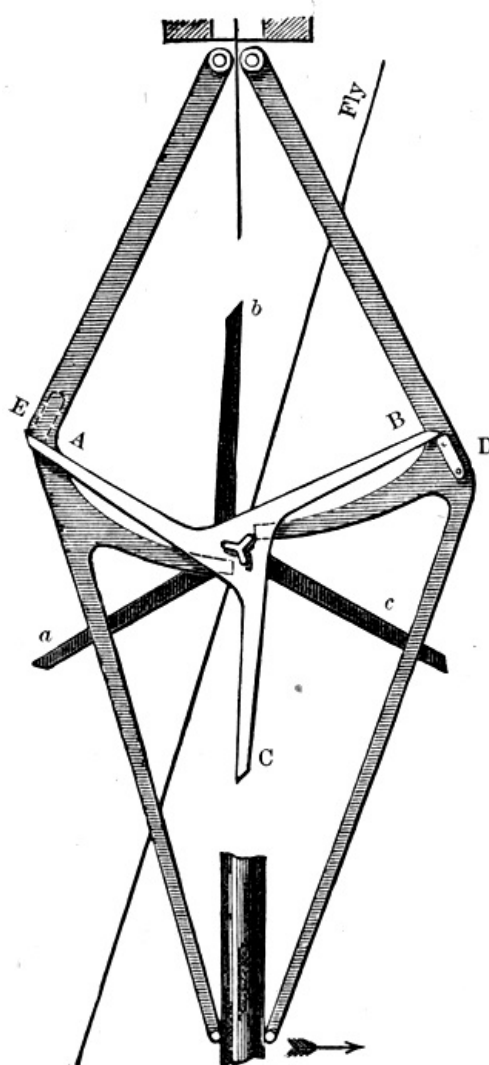

This escapement is chiefly designed for turret clocks with heavy dial-work requiring much power on the scape-wheel. The peculiarity consists of two locking wheels with one set of lifting pins between them. The wheels are set so that the pallets may lie between, and the pallets fall with the pendulum clear of all other contact. The pallet D for instance has its stop in front for the wheel A B C to act upon, and the E stop is acted upon only by *a b c*, the E and A being on different planes. In this escapement, by making the teeth longer and the pallets shorter, the resistance

[155]

of the pendulum is much reduced, and the stride of the pallets being wider, the actual weight required of them is considerably lessened,—a point of some importance.

THE REMONTOIRE.

is an invention which, being derived from the French, still bears its French title, and consists of either a train remontoire, or a gravity or remontoire escapement, in which latter the impulse is not given to the pendulum directly by the clock-train or weight, but by some small weight lifted up or a small spring bent up by the clock-train at every beat of the pendulum, so as to secure a uniform and constant impulse, the remontoire weights being lifted either faster or slower according to need. The train remontoire differs from the escapement but slightly, the chief difference being that the small weight or spring which gives the impulse to the pendulum is not wound up at every beat, but at some larger interval, seldom more than half a minute. Its effect is to counteract the various errors to which large clocks driving heavy hands are always liable, and to diminish the friction which arises from the use of heavy weights—these being in very large clocks almost incredibly heavy; for instance, the weights used by me for my clock in the Great International Exhibition of 1862 amounted to more than two tons. Whatever the cause of inequality of movement in the clock, whether it be dust or dirt, or insufficient oil, or whether it be wind delaying or expediting the progress of the hands on the dial, the remontoire regulates and counteracts.


[156]

THE DIALS.

The utility of a Public Clock is considerably enhanced by its being provided with a dial marking the time in the simplest and most unmistakeable lines, so that it may readily be ascertained at any reasonable distance from the clock-tower what is the hour either by day or night. In order that this important requisite may be attained, it is of course necessary that the dial shall be so constructed as to be visible both by night and day, and so arises the necessity for providing illuminating power either from within or from without. Now the simplest method, and perhaps also in the end the least objectionable, is that followed at the Horse Guards, where the dial forms part of the tower itself, and is lighted not from within, but from without. The advantage of this arrangement is, that the architect can make the dial harmonize with the character of the building, that the illuminating power is kept apart from the clock, and if the centre of the dial be slightly sunk the hands may be brought quite close to the face, so as to prevent any seeming error in time, as is sometimes caused by the convexity of a copper dial. The figures too, having been once carefully divided and cut into the stone, are renewed, so to speak, by merely being painted over.

[157]

[158]

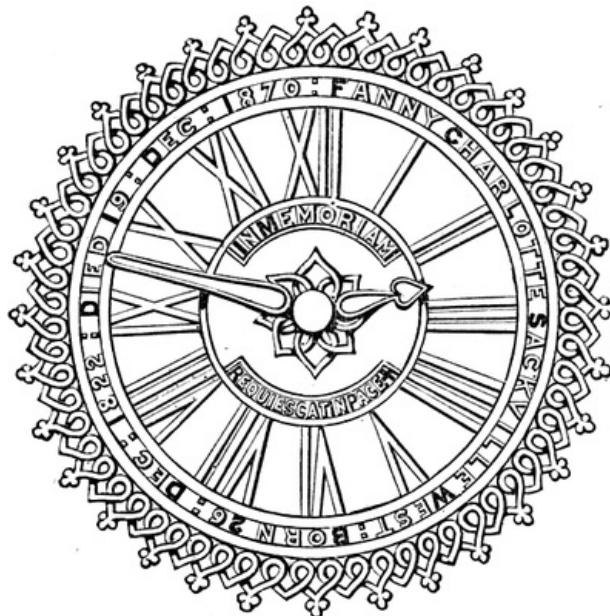

Memorial Turret Clock Dial.

Dials may be made of any material, wood, stone, slate, iron, brass, copper, and coloured or semi-opaque glass. Copper dials possess many advantages, and these have been of late years preferred, except where more ornamental dials are required, in which case slate and skeleton frames are used with good effect. The large dial of my great clock which was placed over the principal entrance of the International Exhibition Building in the Cromwell Road was of slate, elaborately enamelled with white and gold on a blue ground. Another kind of dial having a good effect is that erected by myself some time since for Sir Moses Montefiore, at the Synagogue, Ramsgate, consisting of a skeleton or framework of iron fitted with Minton or encaustic tiles. A dial such as this can thus be made with comparatively little expense during the erection of the tower, and the architect can then, as I have said, design it so as to be in keeping with the edifice; the Minton tiles have also the advantage of being almost indestructible, and of being made of any pattern or colour. The chief points to remember are that the dials should be slightly sunk in the centre so as to allow the hour hand to traverse in the sinking point close to the disc and the figures, and especially that the dial should be made large enough to distinctly show the hour. Properly the dial should never be less in diameter than one-tenth of the number of feet which it is distant from the ground, and in all cases where it is possible I should recommend it to be much larger than this. The dials of St Paul's and Westminster are larger than they would be under the above rule, and they are certainly not too large. As to the colour of the dials, figures, and hands, there is not much choice; dark ground and gilt figures, or white ground with black figures, or a skeleton frame with gilt figures are the chief in use. In the white semi-transparent dials with opaque figures used for illuminated clocks, the time, which is seen with sufficient distinctness by night when the light is behind the figures, is not as clearly indicated by day. To remedy this defect an invention has been applied by which the dial when illuminated at night throws out a beautiful transparent light admirably marking the position of the figures and hands, which being black or dark blue, or even strongly gilt, can also be distinctly seen by day, even as clearly as the long-approved copper dials painted black with gilt figures.

[159]

THE HANDS

should be most carefully made, and like the figures should be painted of a colour which shall most powerfully contrast with that of the dial. The hands are almost invariably made of copper strengthened by diaphragms, and poised from the inside. In some old-fashioned clocks in which the hands have been poised from the outside the effect has been produced of a third hand, and numerous mistakes caused thereby. As to the shape of the hands, there is but one simple rule, namely, that the less of ornamentation in them the better. The minute hand should be perfectly plain, with a tapering but not too fine point, extending to the top of the figures; the hour hand should be of equal breadth and plainness, but its point should be more marked by perhaps an arrowhead or heart-shaped tip only reaching to the bottom of the figures. With large hands counterpoises are found necessary, and these should be placed inside the dial if possible, for they are when outside sometimes mistaken for the point of the hour hand. If a counterpoise must be placed outside, it is better to arrange that it shall be as little as possible, and that the inside counterpoise make up the difference, giving to the latter perhaps two thirds, and one third to the former,—but in any case care has to be taken to prevent the counterpoise appearing like a hand.

[160]

THE FRAME.

The old-fashioned clock-frame, known in the trade as the 'bedstead,' is now generally superseded by the horizontal frame originally introduced by the French, which possesses the special advantage of not only being durable and strong, but that it allows of any part of the clock which may have been injured, or may require cleaning, being easily taken out and replaced without interfering with other portions of the mechanism,—any wheel can be separately handled and removed. In the old upright frame which is even now still in use by some of the more ancient firms of

[161]

clockmakers, if any part of the clock be injured the entire machine must be taken to pieces.

THE FIXING

of a Turret Clock requires much careful forethought and experienced labour; because whatever oversight has been made by the architect in planning the clock-room must be made good by the clockmaker who has to fix up a public time-piece. In the first place the latter will take care that the supports of the clock shall be sufficiently strong and free from vibration, and that the movement shall be bolted securely to the iron girders, or strong oak beams provided for the purpose; he will remember that when it is intended that the clock shall strike the hours and quarters, that the bell or bells should be hung as high in the tower as possible, so that when the stroke of the hammer is given by a perfect fall of the weights, the louvres of the tower should be so arranged as to bring out the full sound of the bell, as in the case of the bell at St Paul's cathedral, which, though only weighing 5 tons 4 cwts., is frequently heard on clear nights as far as Windsor. He will in a word require to be acquainted with all the points of importance attached to his rather intricate duty, or he may by failure render nugatory the best workmanship that could be bestowed in clockmaking. The wiser arrangement as to clock-fixing is to intrust the duty to the clockmaker, and he will then necessarily bear the sole responsibility of any mistake.

[162]

THE WINDING and keeping in order is, as we have said, a less laborious task as respects modern clocks than those which were made fifty years ago, inasmuch as, although it is the duty of a clock-winder to watch daily the action of the time-piece under his charge, he need not perform his winding duties oftener than once a week. He must be on the alert to observe any effect produced by the action of the wind or the fall of snow upon the hands of the clock, which under certain conditions is not uncommon; he must note by some good regulator any tendency to variation in the Church clock, and he must also observe the Equation of Time, which is the difference between true and mean solar time for each day, and which is not quite the same for every year, because it moves on about a quarter of a day in each year until leap year comes and puts it back again. The Equation may be reckoned by an Equation Table, or by the time mentioned in the Almanacs as 'clock before' or 'clock after sun.' It is obviously a very important requisite for good time-keeping that good horological instruments shall be intrusted to skilful and careful hands. In many instances it has happened that escapements made upon the truest scientific principles, and set going in thorough working order, have been so injured by the mechanical genius of the village (some blundering sexton, or some jack-of-all-trades, whose education in mechanism must be exercised at the parish expense), that the new clock with all its merits has been seriously damaged. In such a case the clockmaker had better be at once consulted.


[163]

A MODERN TURRET CLOCK DESCRIBED.

The Turret Clock which the highest skill and the best experience of the value of the latest improvements can produce, may be thus described:—

The Bed or Frame is of cast-iron. The Barrel on which the cords are wound possesses a metal cap in front, and a ratchet or toothed wheel at the back end; between this cap and ratchet is a metal drum or tube adapted to the width of the Frame. Passing through the drum is an axle or barrel-arbor, on the back end of which the main or barrel-wheel is fitted


[164]

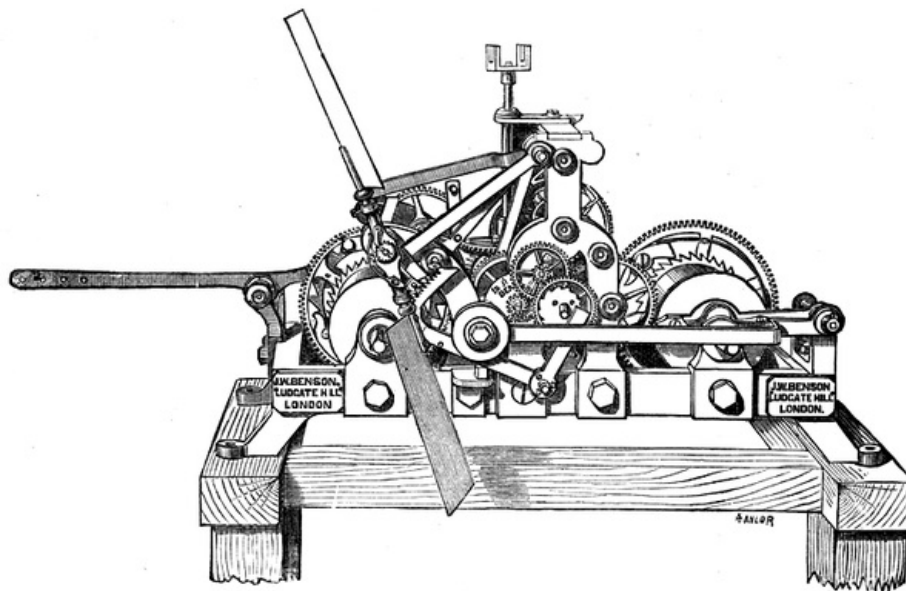

A Modern Turret Clock.

so as to allow the line which carries the weight to be wound upon the barrel without moving the wheel, which latter is kept in place by means of a cap or key pinned tight on the arbor. Upon the barrel wheels are fitted clicks and springs, the former falling into the toothed wheel or ratchet, and the latter keeping the clicks in place while the clock is being wound up, for as the weights are wound up the clicks prevent the barrel running back. At each end of the barrel arbor is a pivot in brass bearings fitted in plumber block, and bolted on the bed or frame with bolts and washers. Beyond the pivot on the front of the arbor is a square to receive the winder. The uprights or small frames for carrying the going-train contain the following; first, there is an arbor across the frame at the back of which is a pinion working in the teeth of the barrel-wheel; at the other end of the arbor is the centre-wheel with teeth cut in it, and above this wheel is another pinion running into it with a wheel at the other end, termed the third wheel and pinion. The escape-pinion runs into the third wheel; on this arbor is fitted the escape-wheel, which has very fine teeth cut in it. Above the escape-wheel is an arbor termed the verge arbor, to which are fitted the pallet arms. The pallet bits or pads working in the escape-wheel teeth are of hardened steel polished. At the back end of the verge arbor is fitted the crutch which connects the escapement and the pendulum rod. The

[165]



Hour-Wheel and Snail.


escapement is that called the dead-beat or lever escapement, found to be the best for time-keeping, and least likely to get out of order. Upon the set-hand arbor, used for setting the hands on the dial to time, are two springs or keys to keep in place a wheel fitted loosely on the arbor, and working in the teeth of the centre-wheel. The hands are set by means of the set key which fits on the end of the arbor in front. At the back end of the same arbor is a joint by means of which an iron rod connects the clock to the dial, and works the outside hands. The whole of the arbors are turned with suitable pivots into brass bearings screwed into the uprights, and all bolted to the bed or frame by stout bolts and washers. On the front upright is fitted an index or set-dial by which to set the outside hands, and two wheels and pinions, termed the motion or dial-work, fitted on sockets and working on iron studs which are screwed into the upright. Upon the largest wheel, known as the hour-wheel, is fixed a snail having twelve steps in it for regulating the strokes to be given at the different hours. The striking-train consists of a barrel similar to the going-train, only that it has a cam or toothed-wheel fitted on the back of the barrel-wheel for the purpose of raising the hammer which strikes the bell, a lever being used called the hammer-tail. This barrel is fitted into bearings in plummer-block, and bolted on frame. The train of wheels and pinions fitted in arbors, and working in brass bearings, consists of,—the pallet pinion fitted tight in the pallet arbor and working in the teeth of the barrel-

[166]

[167]

wheel; at the front end of this arbor is a pallet of steel working in the teeth of the rack (see next illustration), and gathering it up as the blows of the hammer striking the hours are given on the barrel. Above the pallet arbor is a pinion running into the teeth of the pallet wheel and termed the fly-pinion, as it is used for regulating the blows or strokes. Fans are attached to the fly-pinion to assist in regulating the striking,—the intervals between the strokes being thus made longer or shorter as desired. Fitted to the fly-frame is a ratchet with two clicks and springs, these being used to prevent the train being stopped too suddenly, and the damage likely to arise therefrom. At the right-hand side of the clock frame is an arbor to carry the work for the maintaining power, by means of which work the clock is kept going even while it is being wound up, and injury to the escapement is at the same time prevented. But for this maintaining power during the winding-up, whilst the pendulum is vibrating to and fro, the pallets are liable to catch the teeth of the wheel, and these are so fine as to be

[168]

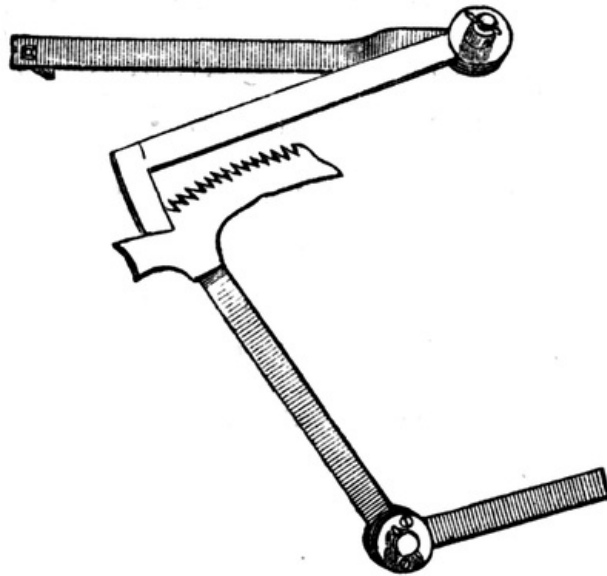

The Rack.


readily injured. As properly fixed the clock cannot be wound up unless this maintaining power is put in action by means of a lever passing in front of the barrel-square, so that the winder cannot be put on the square until the lever is raised and puts this power in action. The repeating work for the striking-train is fitted on brass sockets working on wrought-iron studs screwed into the front upright, and consists of the Rack-hook, Warning, Locking, and Lifting pieces. The Rack is a portion of a circle with a number of half-circular teeth cut on its edge; at the end of the Rack is the Rack-arm fitted with a spring having a nib or pin in it, which nib or pin falls upon the steps of the before-mentioned hour-snail, and thus the different strokes are given at the hours; as the nib falls nearer the centre the rack drops a greater

[169]

number of teeth. The Rack-hook is placed above the rack to catch the rack as it is gathered up by the gathering pallets, and when the proper number of strokes has been given this hook falls into a deep tooth, and then, by means of a locking-piece attached to it, causes the train to be locked with the stop-piece on the fly-pinion arbor, this latter piece forming part of both the locking and warning work. The lifting-piece lifts the rack-hook out of the deep tooth in the rack and locking, by means of a snail or eccentric fitted on the set-hand arbor. On this lifting-piece is also a piece for the warning, fitted on a small stud. The pendulum rod has a brass top, and some adjusting work with a steel suspension spring set in brass, by means of which the clock can be put in beat with great exactness, there being no necessity with this adjustment to bend the crutch as heretofore, for the crutch on the verge arbor has a pin screwed into it which communicates the escapement to the adjusting work or pendulum, and keeps it in motion. At the bottom of the pendulum rod is an iron screw and nut by means of which the pendulum bob is raised or lowered, and the clock made to go faster or slower. The motion or dial work for driving the hands are outside at the back of the dials, and consist of two wheels and pinions working in one another, the larger of the two being fitted to a socket and


[170]

tube. At the other end of this tube is another socket for the hour hand to be fixed to; and through this tube passes another iron rod, at one end of which rod is fitted one of the pinions and the minute hand, the other wheel and pinion being fitted on a socket worked upon a stud in a cock bolted on a bar called the dial bar. If the clock has to drive more than one pair of dial hands, wheels called bevelled or angle wheels are used, which may be cut to suit any angle, so it will not matter how far off the dials may be fitted, or how many they may be, so long as the proper expansion and universal joints are fitted to them. The Hammer-work consists of an iron frame with an arbor pivoted into brass bearings, and upon this arbor is fitted a lever, one end of the lever holding the hammer-head, and the other end raising the hammer. The lifting of the hammer is done by means of a wire from the hammer-tail previously mentioned. There is also a steel spring attached to the lever to prevent the hammer chattering on the bell.

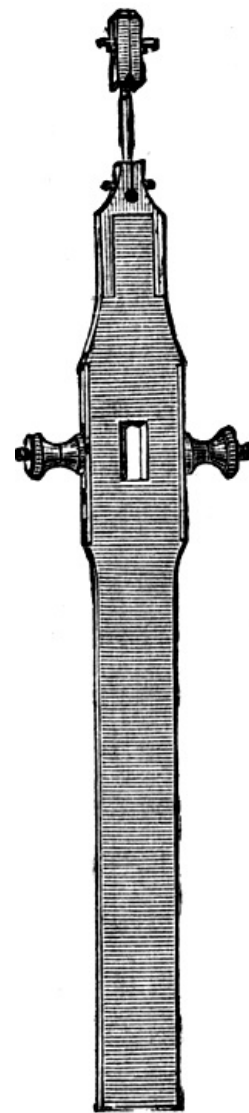

Pendulum Rod.

[171]

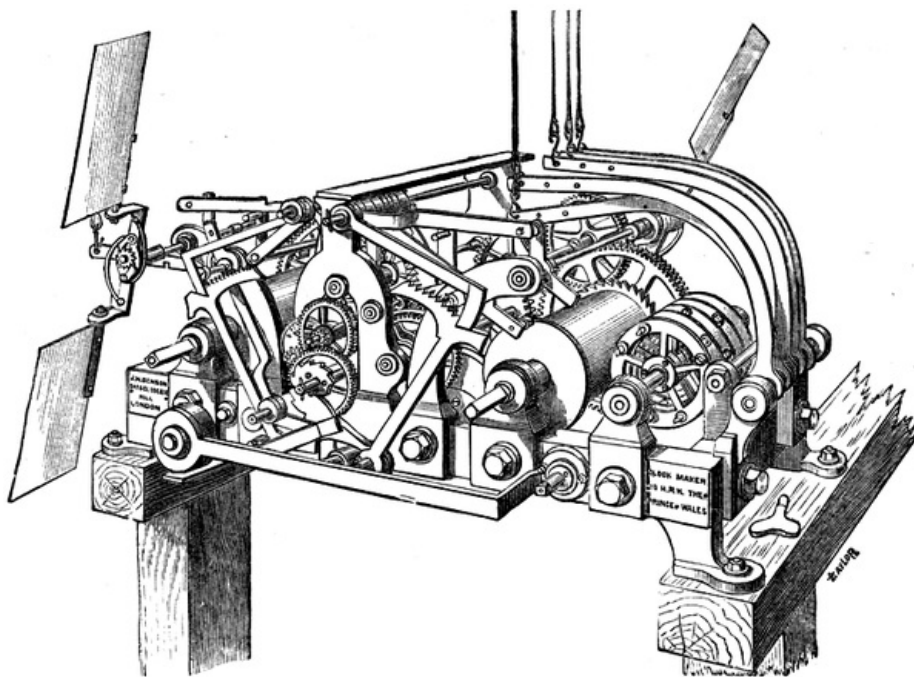


Quarter or Chime Clock.

QUARTER OR CHIME CLOCKS differ from the above only in having another barrel and train of wheels to provide the extra power for such striking and chiming.


[172]

GAS WHEEL FOR ILLUMINATED DIALS.

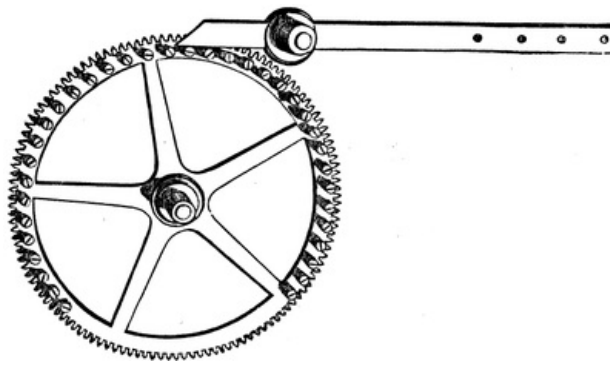

In instances where it is requisite that the clock face should be visible at a great distance, it is necessary that the dial should be made of semi-transparent glass and be illuminated by gas, which is usually turned as low as possible by day and turned on at night by means of the 24-hour wheel, as shown in the annexed illustration, the time for the turning on being regulated by the man in charge of the clock, who takes out or screws in the pins placed in the rim for that purpose.

[173]

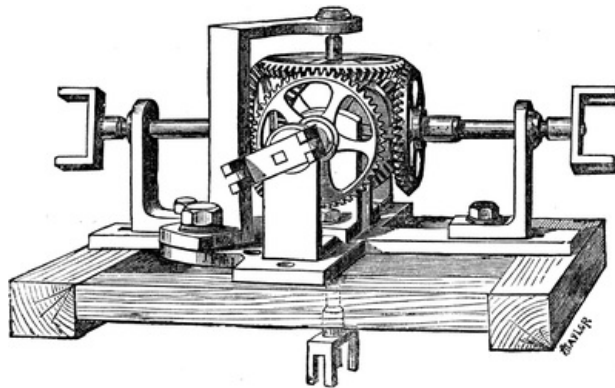


**NEST OF BEVELLED WHEELS FOR FOUR
DIALS.**

These wheels should be rather large, inasmuch as they have to carry the hands moving upon the face of the dial. The size of these wheels varies of course with the size of the clock, but they are seldom less than five inches and are generally from seven to nine inches wide.

HAMMER AND BELL.

The next engraving exhibits the relative positions of hammer and bell in a turret clock,—the hammer being fixed at right angles to the swing of the bell, so that the blow of the hammer should not drive the bell out of reach of its next blow, and this position least interfering with the ringing of the bell, when the bell is required to be rung. The hammer spring, as shown, is sometimes so adjusted as to allow of the hammer being brought nearer or further from the bell.

[174]

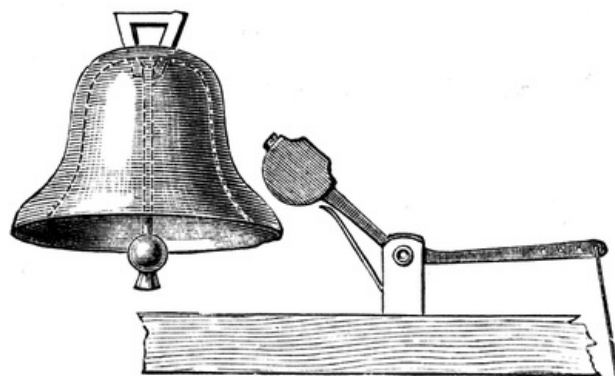


Hammer and Bell.


**THE GREAT CLOCKS OF THE INTERNATIONAL
EXHIBITION OF 1862.
BENSON'S GREAT CLOCK.**

[175]

The movement of this clock, next to that at Westminster, is the largest in the world, and, in point of quality of material and finish of workmanship, it is unequalled by any. The three main wheels are each two feet in diameter, and cast in the solid, of the very finest gun-metal, the teeth being afterwards cut by an engine made expressly for that purpose. The frame is of the best wrought-iron planed to a

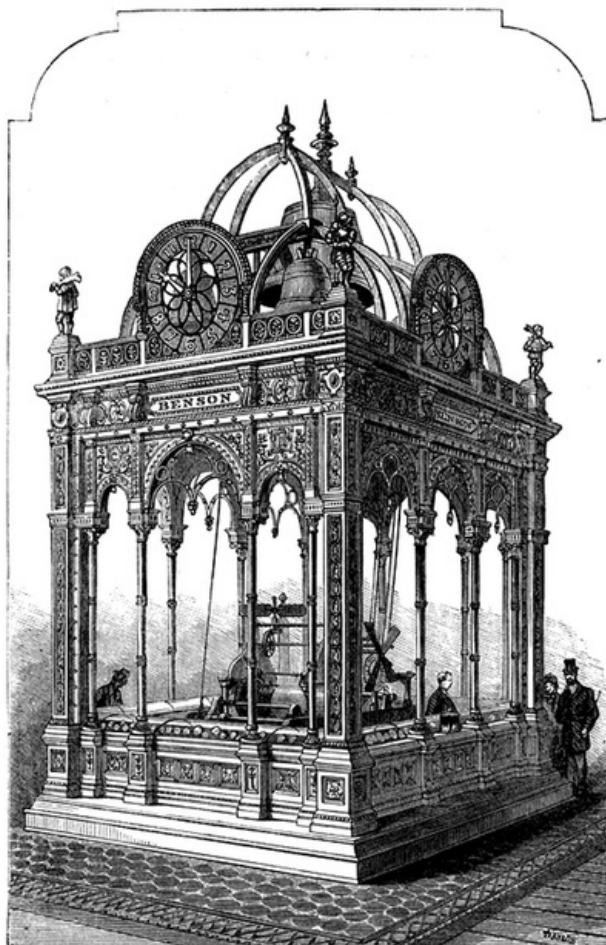

Benson's Great Clock.—The Exterior.

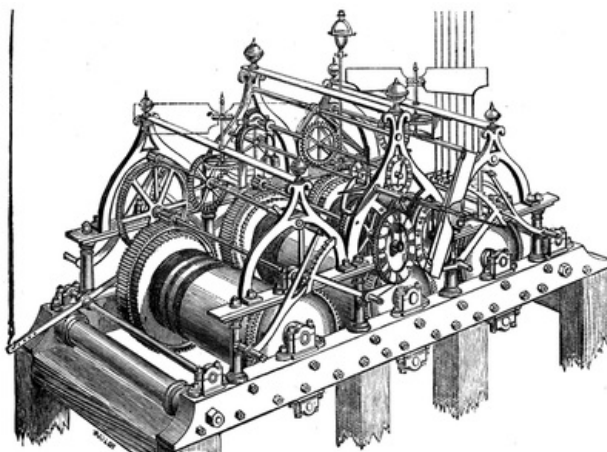

Benson's Great Clock.—The Movement.

[176]

smooth surface, and by means of a contrivance, known to engineers as plumber blocks, any part of the mechanism may be removed without disturbing the remainder. The pendulum, which is self-compensating, is over 15 feet long, and vibrates or beats once in two seconds. The quarter chimes, which are struck on four bells, are a modification of those of S. Mary, Cambridge.

[177]

The great weights necessary to drive so large a clock, and which by the friction they would cause might prejudicially influence its performance, are in this case not allowed to act directly upon the pendulum, but are made to wind up a small auxiliary weight once every half-minute, and this weight imparts an exactly uniform impulse to the pendulum at each vibration. This arrangement, which is called the *remontoir*, is supplemented in this clock by a double lever escapement of a novel kind, in connection with that known as Graham's Dead Beat.

A CALENDAR AND WIND-DIAL

are useful additions to some edifices. The CALENDAR indicates on special circles of a large dial—by means of three separate hands—the month of the year, the day of the month, and the day of the week. The peculiarity of this invention is that it needs no correction for the long and short months, nor even for the month of February, with its occasional 29 days; as by means of a wheel cut for the successive months in a period of four years, and which takes that time for a single revolution, the calendar is rendered a perpetual one. The mechanism which directs the pointers to the days of the week and of the month is discharged, by the clock, each night at 12 o'clock, when the levers shift the hands to their proper places on their several dials. On the first of the month all three hands on the dial are moved at the same instant.

[178]

The WIND-DIAL is lettered with the four cardinal points of the compass and the 12 intermediates. The hand which points on the dial is connected by rods and bevelled wheels with a vane at the top of the house, placed 20 feet above the roof in order to be affected, not by wind eddies, but by the true current of air. The connecting rods boxed in the wall are broken at every eight feet with universal joints, and hardened steel is used for all pivots and sockets. The dials are generally made of semi-transparent ground glass and are lit by gas after dark. In a set of Clock Calendars which I some time since provided for His Grace the Duke of Portland, the clock showed the time on four illuminated dials five feet nine inches in diameter, chiming quarters, hours, &c. (the well-known Cambridge chimes) on bells of 12 cwt., repeating the hour after the 1st, 2nd, and 3rd quarters. The two sides of an adjoining tower show a calendar similar to the one above mentioned, with the addition of an extra circle on the dial to mark the age of the moon and the equation of time, so that each dial has four circles, besides the circle of the moon, shifted simultaneously at 12 o'clock every night.

[179]

SUN-DIALS

(see illustration on following page) are chiefly used now to mark the solar meridian or noon. Those which indicate other hours have a gnomon with its edge parallel to the earth's axis and inclined to the horizon at the angle corresponding to the latitude of the place in which the dial is fixed.

CARILLON CHIMES.

These beautiful examples of *al fresco* music, which have been hitherto chiefly identified with Belgium, are now being produced in England with perhaps even more pleasing and satisfactory musical effect. Carillons attached to Church or Turret Clocks are being set up in various churches and mansions in different parts of the kingdom, and it is not improbable that the taste for such chimes may grow with the opportunity for hearing them. As in musical clocks, the works for time-keeping and those for chiming are entirely distinct, with the exception of the means by which the clock at certain fixed intervals lets off the

[180]



Sun-Dial.

chiming machinery after the striking is done. Chimes were much more popular years ago than they have been until lately. The old-fashioned machinery used to be rude enough, consisting chiefly of a large wooden barrel, stuck, like that of a musical box, with pins. These pins pulled the hammers that struck upon the bells, and the time was regulated by a rope coiled round one end of the barrel driving two or three wheels connected with a fly-wheel. More recent inventions have improved upon these conditions. The barrel is sometimes of cast-iron instead of wood, with steel or brass pins fixed in it to lift the hammers, and a very heavy weight is necessary to give the motive power. Instead of the ordinary method of raising the hammers and letting them fall by means of the pins on a chime barrel, the hammers are immediately after use returned to their places in striking position ready to be liberated by the pins on the chime barrel, and upon being so liberated are prepared to strike again. The tunes to be played upon these bells will of course be such as are adapted to the particular number of bells in each case, and the cost of the entire chimes depends upon the number and sizes of the bells—so used, varying with the circumstances,—the size and capacity of the tower, and the difficulties to be overcome in providing accommodation for the necessary bells, weights, chime barrel, &c. In each instance, as with turret clocks, the cost of the whole works depends to a great extent upon the cost of fixing the machinery. The tones of the bells have to be carefully provided for, as also the best position in which they can be heard at a distance. With fourteen bells of different sizes almost any tune can be played.

[181]

One was erected recently upon the new principle, of which the cost was something under £5000, including 12 bells weighing from five to seven cwt. each, clock, architect's charges, gas-fitting, and £1200 for timber-trussing, floors, &c. The Carillon machine is let off by the clock and plays seven times on the ringing peal of bells, but is adapted to play twenty-eight tunes on fifteen bells. It is wound up every morning and plays eight times in twenty-four hours, *i. e.* once every three hours, giving the tune on each occasion three times, and occupying about four minutes in doing so. At the expiration of the 24 hours the tune changes involuntarily, and of course with seven tunes there is one for each day in the week. The Carillon machinery is connected with the clock and set in motion thereby, by a lever which at three hours' intervals dislodges a pin and allows the weights, 14 cwt. each, to act upon the machinery, the speed being easily regulated, as in clockwork, by revolving vanes. The barrels are five feet long, by one foot in diameter, and are studded with brass pins like that of a musical box. When the bells are required to be rung, a bar is turned down on the keys which prevents the motion of the machinery for any length of time that the ringing is to be continued. Notwithstanding that the twenty-six hammers weigh from 2 cwt. to 70lbs each, it is possible that the tunes could be played by means of an ivory keyboard, as in a church organ, and with almost as much ease and facility.

[182]

[183]

Persons requiring to know the cost of a Church or Turret Clock should furnish the Clockmaker with the following data:—

How many Dials?
Their Diameter?
Their Elevation, or distance
from the ground?
If to be Illuminated?
Of what material is
Dial to be?
Can the Movement be
placed on a level with the
centre of Dial, if not, how
far above or below it?
Is the Clock to strike?
if so, on what size or
weight bell?
If to strike halfhours
or quarters, or how many
bells, and their sizes and
weights?
What number of feet
can be obtained for descent
of weights?
What length of Pendulum
will the building
admit of, and is a compensating
Pendulum required?

A FEW DATES AND DETAILS FOR ALMANAC READERS.

[184]

The following data may be found useful in studying an Almanac.

The columns for SUNRISE AND SUNSET are nearly the same year after year for any given place; for by the alteration of styles and the day allowed at Leap Year the civil and astronomical year are almost exactly the same; but the difference in latitude of different places makes a London almanac useless for sunrise and sunset, say at Edinburgh. The sun rises at each place to a greater height in June than in December, but he is always at a less height in Edinburgh than in London both in winter and summer, Edinburgh being farther than London from the equator, where the sun is more immediately overhead.

The RISING AND SETTING OF THE MOON vary greatly day by day. The moon is constantly moving eastward, and she is not moving in the same path with the sun; the latitude and longitude of the observer's position, the place of the moon in her orbit, the rapidity of her motion, and other particulars, are to be taken into account in computing her rising and setting.

The GOLDEN NUMBER is a term arising from the discovery that the sun performs his annual course 19 times to the moon's 235. The golden number is the number which any given year holds in the Lunar Cycle. After the lapse of 19 years the new moons occur on the same days of the same months as before. This discovery being esteemed by the Romans to be highly important, they set up the rule for ascertaining the number of the year in the Lunar Cycle in a tablet with letters of gold, hence the term Golden Number. To find the year of the Lunar Cycle add one to the present year, then divide by 19 and the remainder will show the year of the Cycle.

[185]

The EPACT is the number of days which must be added to a lunar year to complete a solar year. Twelve lunar months being nearly 11 days less than the solar year, the new moons in one year falling 11 days earlier than in the year preceding it, it becomes necessary on the fourth year, when the difference would amount to 33 days, to take off 30 days as an intercalary month, during which the moon has made a

revolution, and the three remaining would be the epact or 'addition,' which thus continues to vary until the 19 years have expired, and the new moons recur as before.

The SOLAR CYCLE is complete in 28 years, after which the days of the month return to the same days of the week as before.

The DOMINICAL OR SUNDAY LETTER, as one of the first seven letters of the alphabet, used to denote the days of the week, one of which must of course fall on the Sunday throughout the year. Owing to Leap Year their order every fourth year is disturbed, so that the Solar Cycle must pass round before the letters can fall to the same days of the week.

[186]

THE NUMBER OF DIRECTION. The Council of Nice having decided, A.D. 325, that Easter Day is always the first Sunday after the full moon which happens upon or next after the 21st of March, it follows that Easter Day cannot take place earlier than the 22nd of March, or later than the 25th of April. The number of Direction is that day of the 35, on which Easter Sunday falls.

ROMAN INDICION was a period of fifteen years, appointed by the Emperor Constantine, A.D. 312, for the payment of certain taxes. It was observed by the Greek and Roman Churches.

THE JULIAN PERIOD consists of 7980 years, produced by the multiplication into each other of the Solar and Lunar Cycles and the Roman Indiction, $28 \times 19 \times 15 = 7980$. This period is reckoned from 709 before the Creation of the World, when the three Cycles are supposed to have commenced together; the lapse of the entire period will be A.D. 3267.

EQUATION OF TIME is the difference between the time as indicated by a sun-dial, and that by a good clock. It is necessary because the sun, the chief agent in measuring time, does not upon all days of the year appear to move equally fast, inasmuch as an hour by a sun-dial, correctly indicating the sun's motion, is sometimes longer, sometimes shorter, than an hour by the clock, the hours of which are supposed to be perfectly equal, although the sun's are not. The Equation of Time shows how many minutes are to be added to, or subtracted from, sun-dial time in order to show clock time. The same table of equation will serve all over the world. [See following pages for Equation Table.]

[187]

TRUE OR SOLAR TIME is that marked by the sun, and it is taken at the moment when he has attained his greatest height above the horizon,—such a moment being of course dependent upon the latitude of the place of observation. The solar time by which our nautical standard is fixed, is that of the meridian of Greenwich.

SIDEREAL TIME is that measured by the fixed stars, which are at such an immense distance from the earth that the diurnal motion of the earth brings these stars to the meridian at sufficiently regular intervals. It is necessary, however, to remember when making observations for sidereal time that these must be made from fixed or twinkling stars, not from planets.

Of the various Eras from which time has been dated, the following are the chief:—

A.M. *Anno Mundi*. The Year of the World, dating from the Creation, according to Jewish Calendar 5635

The Deluge, Era of, variously reckoned 2348 to 3155 B.C.

The first Olympiad 776 B.C.

A.U.C. or *Anno Urbis Conditæ*, the year of the building of Rome 753 B.C.

[188]

The Hegira, or Flight of Mahomet from Mecca to Medina 622 A.D.

The Birth of Christ in the year of the World 4004

The Jewish year 5635 commenced Sept. 12, 1874 A.D.

A TABLE OF THE EQUATION OF TIME, For regulating Clocks and Watches for 1875.							
Day	January	February	March	April	May	June	
1	3m. fa. 45s.	13m. fa. 50s.	13m. fa. 50s.	4m. fa. 1s.	3m. sl. 0s.	2m. sl. 30s.	
3	4 41	14 4	12 11	3 25	3 14	2 12	
5	5 36	14 16	11 45	2 49	3 26	1 51	
7	6 29	14 24	11 16	2 14	3 35	1 30	
9	7 20	14 29	10 47	1 41	3 43	1 7	
11	8 9	14 30	10 16	1 8	3 48	0 44	
13	8 55	14 29	9 43	0 36	3 51	0 19	
15	9 39	14 24	9 9	0 5	3 51	0 fa. 6	
17	10 20	14 16	8 35	0 sl. 24	3 50	0 31	
19	10 58	14 6	7 59	0 52	3 46	0 57	
21	11 33	13 53	7 23	1 18	3 40	1 23	
23	12 5	13 37	6 46	1 42	3 32	1 48	
25	12 34	13 19	6 9	2 5	3 22	2 14	
27	13 0	12 58	5 32	2 25	3 10	2 39	
29	13 22	---	4 55	2 44	2 55	3 4	
31	13 41	---	4 19	---	2 39	---	

EQUATION OF TIME, 1875—continued.							
Day	July	August	September	October	November	December	
1	3m. fa. 28s.	6m. fa. 5s.	0m. sl. 3s.	10m. sl. 16s.	16m. sl. 18s.	10m. sl. 52s.	
3	3 51	5 57	0 41	10 54	16 19	10 5	
5	4 13	5 47	1 20	11 30	16 17	9 17	
7	4 33	5 34	2 0	12 5	16 12	8 26	
9	4 52	5 19	2 41	12 38	16 4	7 33	
11	5 9	5 2	3 22	13 10	15 52	6 38	
13	5 24	4 42	4 4	13 40	15 37	5 42	
15	5 38	4 20	4 47	14 8	15 18	4 45	
17	5 49	3 55	5 29	14 33	14 56	3 47	
19	5 59	3 29	6 12	14 56	14 31	2 47	
21	6 6	3 1	6 54	15 17	14 2	1 48	
23	6 11	2 31	7 36	15 34	13 30	0 48	
25	6 13	1 59	8 17	15 49	12 55	0 fa. 12	
27	6 14	1 26	8 58	16 1	12 17	1 12	
29	6 12	0 52	9 37	16 10	11 36	2 11	
31	6 8	0 16	---	16 16	---	3 10	

Note.—Fa. means clock to be fast, *that is*, your Clock, to be right, must be so much faster than the Sun-Dial—Sl. that your Clock must be so much slower than the Sun-Dial. *To set a Clock or Watch on any Day by means of this Table:*—Take out the number of Minutes and Seconds which stand against that day, and make your Clock or Watch so much faster or slower (according as the table is marked *fa.* or *sl.*) than the time on a good Sun-Dial. Thus, on January 1st, the Clock must be set 3m. 45s. *faster* or *before* the Dial; on the 1st of October, it must be set 10m. 16s. *slower*. Correct the Watch when the Dial marks just an hour, as 9, 10, 11, 1, 2, 3, or 4 o'clock. Noon is *not* best, nor near Sunrise or Sunset.

JOHN CHILDS AND SON, PRINTERS.

Transcriber's Notes:

The Table of Contents was added by the transcriber.

Obvious punctuation and spelling errors repaired.

Page numbers for blank pages are not visible.

Inconsistent hyphenation has been repaired.

The oe and ae ligatures in the text have been left as they appear in the original book. If they do not display properly, you may have an incompatible browser or unavailable fonts. Make sure that the browser's "character set" or "file encoding" is set to Unicode (UTF-8). You may also need to change your browser's default font.

The remaining corrections made are indicated by red dotted lines under the corrections. Scroll the mouse over the word and the original text will be displayed.

The cover for the eBook version of this book was created by the transcriber and is placed in the public domain.

In ambiguous cases, the text has been left as it appears in the original book.

*** END OF THE PROJECT GUTENBERG EBOOK TIME AND TIME-TELLERS ***

Updated editions will replace the previous one—the old editions will be renamed.

Creating the works from print editions not protected by U.S. copyright law means that no one owns a United States copyright in these works, so the Foundation (and you!) can copy and distribute it in the United States without permission and without paying copyright royalties. Special rules, set forth in the General Terms of Use part of this license, apply to copying and distributing Project Gutenberg™ electronic works to protect the PROJECT GUTENBERG™ concept and trademark. Project Gutenberg is a registered trademark, and may not be used if you charge for an eBook, except by following the terms of the trademark license, including paying royalties for use of the Project Gutenberg trademark. If you do not charge anything for copies of this eBook, complying with the trademark license is very easy. You may use this eBook for nearly any purpose such as creation of derivative works, reports, performances and research. Project Gutenberg eBooks may be modified and printed and given away—you may do practically ANYTHING in the United States with eBooks not protected by U.S. copyright law. Redistribution is subject to the trademark license, especially commercial redistribution.

START: FULL LICENSE
THE FULL PROJECT GUTENBERG LICENSE
PLEASE READ THIS BEFORE YOU DISTRIBUTE OR USE THIS WORK

To protect the Project Gutenberg™ mission of promoting the free distribution of electronic works, by using or distributing this work (or any other work associated in any way with the phrase “Project Gutenberg”), you agree to comply with all the terms of the Full Project Gutenberg™ License available with this file or online at www.gutenberg.org/license.

Section 1. General Terms of Use and Redistributing Project Gutenberg™ electronic works

1.A. By reading or using any part of this Project Gutenberg™ electronic work, you indicate that you have read, understand, agree to and accept all the terms of this license and intellectual property (trademark/copyright) agreement. If you do not agree to abide by all the terms of this agreement, you must cease using and return or destroy all copies of Project Gutenberg™ electronic works in your possession. If you paid a fee for obtaining a copy of or access to a Project Gutenberg™ electronic work and you do not agree to be bound by the terms of this agreement, you may obtain a refund from the person or entity to whom you paid the fee as set forth in paragraph 1.E.8.

1.B. “Project Gutenberg” is a registered trademark. It may only be used on or associated in any way with an electronic work by people who agree to be bound

by the terms of this agreement. There are a few things that you can do with most Project Gutenberg™ electronic works even without complying with the full terms of this agreement. See paragraph 1.C below. There are a lot of things you can do with Project Gutenberg™ electronic works if you follow the terms of this agreement and help preserve free future access to Project Gutenberg™ electronic works. See paragraph 1.E below.

1.C. The Project Gutenberg Literary Archive Foundation (“the Foundation” or PGLAF), owns a compilation copyright in the collection of Project Gutenberg™ electronic works. Nearly all the individual works in the collection are in the public domain in the United States. If an individual work is unprotected by copyright law in the United States and you are located in the United States, we do not claim a right to prevent you from copying, distributing, performing, displaying or creating derivative works based on the work as long as all references to Project Gutenberg are removed. Of course, we hope that you will support the Project Gutenberg™ mission of promoting free access to electronic works by freely sharing Project Gutenberg™ works in compliance with the terms of this agreement for keeping the Project Gutenberg™ name associated with the work. You can easily comply with the terms of this agreement by keeping this work in the same format with its attached full Project Gutenberg™ License when you share it without charge with others.

1.D. The copyright laws of the place where you are located also govern what you can do with this work. Copyright laws in most countries are in a constant state of change. If you are outside the United States, check the laws of your country in addition to the terms of this agreement before downloading, copying, displaying, performing, distributing or creating derivative works based on this work or any other Project Gutenberg™ work. The Foundation makes no representations concerning the copyright status of any work in any country other than the United States.

1.E. Unless you have removed all references to Project Gutenberg:

1.E.1. The following sentence, with active links to, or other immediate access to, the full Project Gutenberg™ License must appear prominently whenever any copy of a Project Gutenberg™ work (any work on which the phrase “Project Gutenberg” appears, or with which the phrase “Project Gutenberg” is associated) is accessed, displayed, performed, viewed, copied or distributed:

This eBook is for the use of anyone anywhere in the United States and most other parts of the world at no cost and with almost no restrictions whatsoever. You may copy it, give it away or re-use it under the terms of the Project Gutenberg License included with this eBook or online at www.gutenberg.org. If you are not located in the United States, you will have to check the laws of the country where you are located before using this eBook.

1.E.2. If an individual Project Gutenberg™ electronic work is derived from texts not protected by U.S. copyright law (does not contain a notice indicating that it is posted with permission of the copyright holder), the work can be copied and distributed to anyone in the United States without paying any fees or charges. If you are redistributing or providing access to a work with the phrase “Project Gutenberg” associated with or appearing on the work, you must comply either with the requirements of paragraphs 1.E.1 through 1.E.7 or obtain permission for the use of the work and the Project Gutenberg™ trademark as set forth in paragraphs 1.E.8 or 1.E.9.

1.E.3. If an individual Project Gutenberg™ electronic work is posted with the permission of the copyright holder, your use and distribution must comply with both paragraphs 1.E.1 through 1.E.7 and any additional terms imposed by the copyright holder. Additional terms will be linked to the Project Gutenberg™ License for all works posted with the permission of the copyright holder found at the beginning of this work.

1.E.4. Do not unlink or detach or remove the full Project Gutenberg™ License terms from this work, or any files containing a part of this work or any other work associated with Project Gutenberg™.

1.E.5. Do not copy, display, perform, distribute or redistribute this electronic work, or any part of this electronic work, without prominently displaying the sentence set forth in paragraph 1.E.1 with active links or immediate access to the full terms of the Project Gutenberg™ License.

1.E.6. You may convert to and distribute this work in any binary, compressed, marked up, nonproprietary or proprietary form, including any word processing or

hypertext form. However, if you provide access to or distribute copies of a Project Gutenberg™ work in a format other than “Plain Vanilla ASCII” or other format used in the official version posted on the official Project Gutenberg™ website (www.gutenberg.org), you must, at no additional cost, fee or expense to the user, provide a copy, a means of exporting a copy, or a means of obtaining a copy upon request, of the work in its original “Plain Vanilla ASCII” or other form. Any alternate format must include the full Project Gutenberg™ License as specified in paragraph 1.E.1.

1.E.7. Do not charge a fee for access to, viewing, displaying, performing, copying or distributing any Project Gutenberg™ works unless you comply with paragraph 1.E.8 or 1.E.9.

1.E.8. You may charge a reasonable fee for copies of or providing access to or distributing Project Gutenberg™ electronic works provided that:

- You pay a royalty fee of 20% of the gross profits you derive from the use of Project Gutenberg™ works calculated using the method you already use to calculate your applicable taxes. The fee is owed to the owner of the Project Gutenberg™ trademark, but he has agreed to donate royalties under this paragraph to the Project Gutenberg Literary Archive Foundation. Royalty payments must be paid within 60 days following each date on which you prepare (or are legally required to prepare) your periodic tax returns. Royalty payments should be clearly marked as such and sent to the Project Gutenberg Literary Archive Foundation at the address specified in Section 4, “Information about donations to the Project Gutenberg Literary Archive Foundation.”
- You provide a full refund of any money paid by a user who notifies you in writing (or by e-mail) within 30 days of receipt that s/he does not agree to the terms of the full Project Gutenberg™ License. You must require such a user to return or destroy all copies of the works possessed in a physical medium and discontinue all use of and all access to other copies of Project Gutenberg™ works.
- You provide, in accordance with paragraph 1.F.3, a full refund of any money paid for a work or a replacement copy, if a defect in the electronic work is discovered and reported to you within 90 days of receipt of the work.
- You comply with all other terms of this agreement for free distribution of Project Gutenberg™ works.

1.E.9. If you wish to charge a fee or distribute a Project Gutenberg™ electronic work or group of works on different terms than are set forth in this agreement, you must obtain permission in writing from the Project Gutenberg Literary Archive Foundation, the manager of the Project Gutenberg™ trademark. Contact the Foundation as set forth in Section 3 below.

1.F.

1.F.1. Project Gutenberg volunteers and employees expend considerable effort to identify, do copyright research on, transcribe and proofread works not protected by U.S. copyright law in creating the Project Gutenberg™ collection. Despite these efforts, Project Gutenberg™ electronic works, and the medium on which they may be stored, may contain “Defects,” such as, but not limited to, incomplete, inaccurate or corrupt data, transcription errors, a copyright or other intellectual property infringement, a defective or damaged disk or other medium, a computer virus, or computer codes that damage or cannot be read by your equipment.

1.F.2. LIMITED WARRANTY, DISCLAIMER OF DAMAGES - Except for the “Right of Replacement or Refund” described in paragraph 1.F.3, the Project Gutenberg Literary Archive Foundation, the owner of the Project Gutenberg™ trademark, and any other party distributing a Project Gutenberg™ electronic work under this agreement, disclaim all liability to you for damages, costs and expenses, including legal fees. YOU AGREE THAT YOU HAVE NO REMEDIES FOR NEGLIGENCE, STRICT LIABILITY, BREACH OF WARRANTY OR BREACH OF CONTRACT EXCEPT THOSE PROVIDED IN PARAGRAPH 1.F.3. YOU AGREE THAT THE FOUNDATION, THE TRADEMARK OWNER, AND ANY DISTRIBUTOR UNDER THIS AGREEMENT WILL NOT BE LIABLE TO YOU FOR ACTUAL, DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE OR INCIDENTAL DAMAGES EVEN IF YOU GIVE NOTICE OF THE POSSIBILITY OF SUCH DAMAGE.

1.F.3. LIMITED RIGHT OF REPLACEMENT OR REFUND - If you discover a

defect in this electronic work within 90 days of receiving it, you can receive a refund of the money (if any) you paid for it by sending a written explanation to the person you received the work from. If you received the work on a physical medium, you must return the medium with your written explanation. The person or entity that provided you with the defective work may elect to provide a replacement copy in lieu of a refund. If you received the work electronically, the person or entity providing it to you may choose to give you a second opportunity to receive the work electronically in lieu of a refund. If the second copy is also defective, you may demand a refund in writing without further opportunities to fix the problem.

1.F.4. Except for the limited right of replacement or refund set forth in paragraph 1.F.3, this work is provided to you 'AS-IS', WITH NO OTHER WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE.

1.F.5. Some states do not allow disclaimers of certain implied warranties or the exclusion or limitation of certain types of damages. If any disclaimer or limitation set forth in this agreement violates the law of the state applicable to this agreement, the agreement shall be interpreted to make the maximum disclaimer or limitation permitted by the applicable state law. The invalidity or unenforceability of any provision of this agreement shall not void the remaining provisions.

1.F.6. INDEMNITY - You agree to indemnify and hold the Foundation, the trademark owner, any agent or employee of the Foundation, anyone providing copies of Project Gutenberg™ electronic works in accordance with this agreement, and any volunteers associated with the production, promotion and distribution of Project Gutenberg™ electronic works, harmless from all liability, costs and expenses, including legal fees, that arise directly or indirectly from any of the following which you do or cause to occur: (a) distribution of this or any Project Gutenberg™ work, (b) alteration, modification, or additions or deletions to any Project Gutenberg™ work, and (c) any Defect you cause.

Section 2. Information about the Mission of Project Gutenberg™

Project Gutenberg™ is synonymous with the free distribution of electronic works in formats readable by the widest variety of computers including obsolete, old, middle-aged and new computers. It exists because of the efforts of hundreds of volunteers and donations from people in all walks of life.

Volunteers and financial support to provide volunteers with the assistance they need are critical to reaching Project Gutenberg™'s goals and ensuring that the Project Gutenberg™ collection will remain freely available for generations to come. In 2001, the Project Gutenberg Literary Archive Foundation was created to provide a secure and permanent future for Project Gutenberg™ and future generations. To learn more about the Project Gutenberg Literary Archive Foundation and how your efforts and donations can help, see Sections 3 and 4 and the Foundation information page at www.gutenberg.org.

Section 3. Information about the Project Gutenberg Literary Archive Foundation

The Project Gutenberg Literary Archive Foundation is a non-profit 501(c)(3) educational corporation organized under the laws of the state of Mississippi and granted tax exempt status by the Internal Revenue Service. The Foundation's EIN or federal tax identification number is 64-6221541. Contributions to the Project Gutenberg Literary Archive Foundation are tax deductible to the full extent permitted by U.S. federal laws and your state's laws.

The Foundation's business office is located at 809 North 1500 West, Salt Lake City, UT 84116, (801) 596-1887. Email contact links and up to date contact information can be found at the Foundation's website and official page at www.gutenberg.org/contact

Section 4. Information about Donations to the Project Gutenberg Literary Archive Foundation

Project Gutenberg™ depends upon and cannot survive without widespread public support and donations to carry out its mission of increasing the number of public domain and licensed works that can be freely distributed in machine-readable form accessible by the widest array of equipment including outdated equipment. Many small donations (\$1 to \$5,000) are particularly important to maintaining tax exempt status with the IRS.

The Foundation is committed to complying with the laws regulating charities and charitable donations in all 50 states of the United States. Compliance requirements are not uniform and it takes a considerable effort, much paperwork and many fees to meet and keep up with these requirements. We do not solicit donations in locations where we have not received written confirmation of compliance. To SEND DONATIONS or determine the status of compliance for any particular state visit www.gutenberg.org/donate.

While we cannot and do not solicit contributions from states where we have not met the solicitation requirements, we know of no prohibition against accepting unsolicited donations from donors in such states who approach us with offers to donate.

International donations are gratefully accepted, but we cannot make any statements concerning tax treatment of donations received from outside the United States. U.S. laws alone swamp our small staff.

Please check the Project Gutenberg web pages for current donation methods and addresses. Donations are accepted in a number of other ways including checks, online payments and credit card donations. To donate, please visit: www.gutenberg.org/donate

Section 5. General Information About Project Gutenberg™ electronic works

Professor Michael S. Hart was the originator of the Project Gutenberg™ concept of a library of electronic works that could be freely shared with anyone. For forty years, he produced and distributed Project Gutenberg™ eBooks with only a loose network of volunteer support.

Project Gutenberg™ eBooks are often created from several printed editions, all of which are confirmed as not protected by copyright in the U.S. unless a copyright notice is included. Thus, we do not necessarily keep eBooks in compliance with any particular paper edition.

Most people start at our website which has the main PG search facility: www.gutenberg.org.

This website includes information about Project Gutenberg™, including how to make donations to the Project Gutenberg Literary Archive Foundation, how to help produce our new eBooks, and how to subscribe to our email newsletter to hear about new eBooks.